
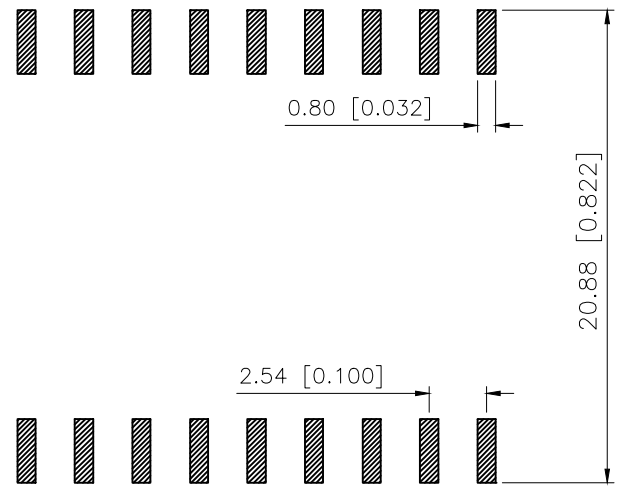


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.19	阿树

A

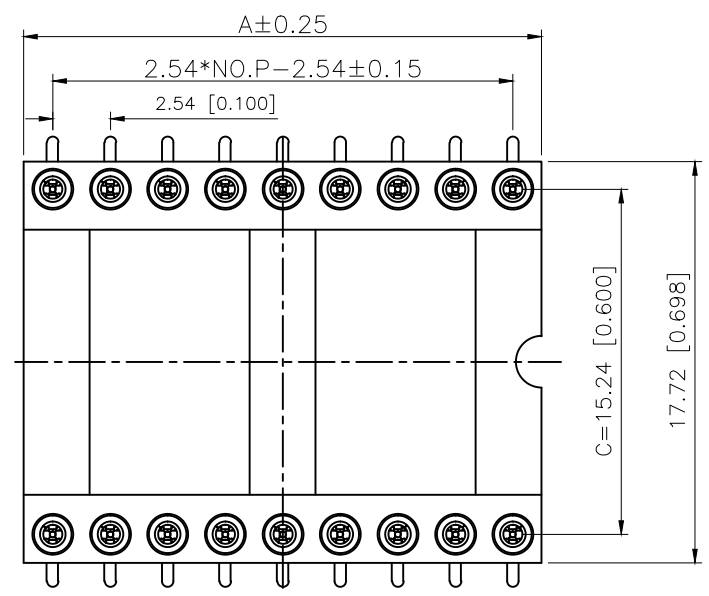



Recommended P.C.B
Layout(±0.05)

Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
Clip (Contact 4 Finger):Beryllium copper,heat teated
Insulator:PBT UL94V-0 colour:black
Tin Plated:2um"/80u"NI,5um"/200u"Sn
Gold Plated:2um"/80u"NI,GF
Current rating:3Amps
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operaling temperature:-40°C~+105°C

PART NO.:

X5621 F V S-2xXX-C1524 D1988
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:F-Female
- ③Welding Board Angle:V-Stright 180°
- ④Welding Way: S-SMT
- ⑤Row No-Pin No:2xXX-2x02Pin-2x25Pin
- ⑥Plastic Height:C=15.24mm
- ⑦Pin Length:D=19.88mm

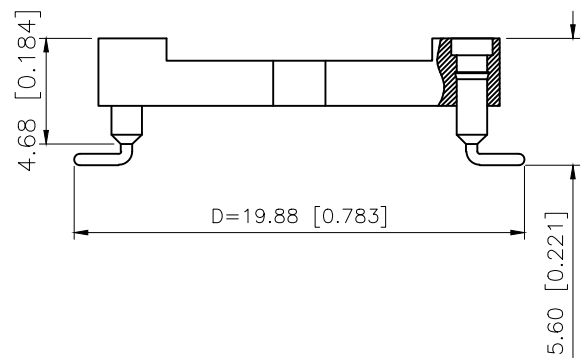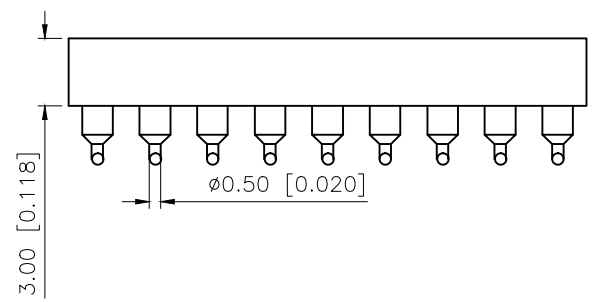

Dimensions(mm)			
Poles	A	Poles	A
2x02	5.08	2x10	25.40
2x03	7.62	2x12	30.48
2x04	10.16	2x14	35.56
2x05	12.70	2x16	40.64
2x06	15.24	2x20	50.80
2x07	17.78	2x21	53.34
2x08	20.32	2x24	60.96
2x09	22.86	2x25	63.50

X5621FVS-2xXX-C1524D1988	PBT 94V-0	Brass	Tin Gold 1u"	X5621F
PART NO	Material	Material(Pin)	Finish(Terminal)	Mates With XKB Pin Header

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm BTB Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X5621FVS-2xXX-C1524D1988
APPROVED		SIZE:	A4	DWG NO.:	

D

D

1

2

3

4