

Specifications:

规格:

Voltage rating:100V AC/DC

额定电压: 100V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance: 1000MΩ min




绝缘电阻: 1000MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

K 205001 T F - P SN
 ① ② ③ ④ ⑤ ⑥

- 1.K-XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:T-Terminal
- 4.Category:F-Female Terminal
- 5.Material:P-Phosphor Bronze
- 6.Plating:SN-Plated Tin

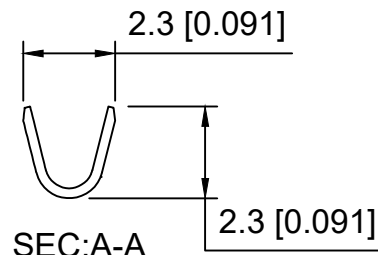

K205001TF-PSN	Phosphor Bronze	AWG#22-26	K205001HM
PART NO	Material	Wire Range	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 2.0mm automotive connector
DWN	VIEW:	PART NO.: K205001TF-PSN
CHKD	UNIT: mm/in	DWG NO.: X-K205001TF-PSN
APPD	SIZE: A4	

Δx					ANGULAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4
					L > 63	±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED

UNSPECIFIED TOLERANCES	WEIGHT	SHEET	REVISION
		1/1	A0