

Case Style ODS 1314

Features

- ◆ 0603 Outline
- ◆ Surface Mount
- ◆ 25μm I-Region Length Devices
- ◆ No Wirebonds Required
- ◆ Silicon Nitride Passivation
- ◆ Polymer Scratch Protection
- ◆ Low Parasitic Capacitance and Inductance
- ◆ High Average and Peak Power Handling

Description

This device is a silicon, glass PIN diode surmount chip fabricated with M/A-COM's patented HMIC™ process. This device features two silicon pedestals embedded in a low loss, low dispersion glass. The diode is formed on the top of one pedestal and connections to the backside of the device are facilitated by making the pedestal sidewalls electrically conductive. Selective backside metallization is applied producing a surface mount device. This vertical topology provides for exceptional heat transfer. The topside is fully encapsulated with silicon nitride and has an additional polymer layer for scratch and impact protection. These protective coatings prevent damage to the junction and the anode air-bridge during handling and assembly.


Applications

These packageless devices are suitable for usage in moderate incident power, ≤50dBm/C.W. or where the peak power is ≤75dBm, pulse width is 1μs, and duty cycle is 0.01%. Their low parasitic inductance, 0.4 nH, and excellent RC constant, make these devices a superior choice for higher frequency switch elements when compared to their plastic package counterparts.

Absolute Maximum Ratings¹ @ TA = +25°C
(unless otherwise specified)

Parameter	Absolute Maximum
Forward Current	500 mA
Reverse Voltage	- 135 V
Operating Temperature	-55°C to +125°C
Storage Temperature	-55 °C to +150°C
Junction Temperature	+175°C
C.W. Incident Power	50dBm
Mounting Temperature	+280°C for 30 seconds

1) Exceeding these limits may cause permanent damage

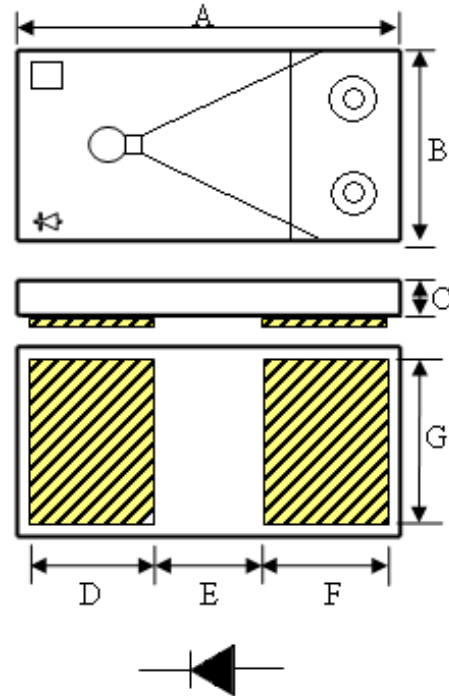

Chip Dimensions

DIM	INCHES		MM	
	Min	Max	Min	Max
A	0.060	0.062	1.525	1.575
B	0.031	0.032	0.775	0.825
C	0.004	0.008	0.102	0.203
D	0.019	0.021	0.475	0.525
E	0.019	0.021	0.475	0.525
F	0.019	0.021	0.475	0.525
G	0.029	0.031	0.725	0.775

Notes:

- 1) Backside metal: 0.1microns thick.
- 2) Yellow area with hatch lines indicate backside ohmic gold contacts.
- 3) Both devices have same outline dimensions (A to G).

Electrical Specifications @ $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Parameter	Symbol	Conditions	Units	MADP-017025			MADP-030025		
				Min	Typ	Max	Min	Typ	Max
Capacitance ¹	C_T	- 40V, 1MHz ¹	pF		0.23	0.29		0.50	0.56
Capacitance ¹	C_T	- 40V, 1GHz ^{1,3}	pF		0.23			0.50	
Capacitance ¹ , 85°C	C_T	- 40V, 1GHz ^{1,3}	pF		0.22			-	
Resistance ²	R_S	+10mA, 1GHz ^{2,3}	Ω		1.01			0.65	
Resistance ²	R_S	+70mA, 1GHz ^{2,3}	Ω		0.64			0.45	
Resistance ² , 85°C	R_S	+10mA, 1GHz ^{2,3}	Ω		1.48			-	
Resistance ² , 85°C	R_S	+70mA, 1GHz ^{2,3}	Ω		1.03			-	
Forward Voltage	V_F	+10mA	V		0.74	0.90		0.73	0.90
Reverse Leakage Current	I_R	-135V	μA		-	10		-	10
Third Order Intercept Point	IP3	F1 = 1800MHz F2 = 1810MHz Input Power = +39dBm CW I bias = +70mA	dBm		76			77	
C.W. Thermal Resistance	R_{qJL}	$I_H = 0.5\text{A}$, $I_L = 10\text{mA}$	$^\circ\text{C/W}$		30			13	
Lifetime	T_L	+10mA / -6mA (50 % - 90 % V)	μS		2.3			2.8	

Notes:


- 1) Total capacitance, C_T , is equivalent to the sum of Junction Capacitance, C_j , and Parasitic Capacitance, C_{par} .
- 2) Series resistance R_S is equivalent to the total diode resistance : $R_S = R_j$ (Junction Resistance) + R_C (Ohmic Resistance)
- 3) R_S and C_T are measured on an HP4291A Impedance Analyzer with die mounted in an ODS213 package with 80/20, Au/Sn solder.

MADP-0XX025 Series Typical Spice Parameters @ +25°C


Spice Parameter	N	RS	IS	IK	BV	IBV	Ct	CJO	VJ	M	FC	Cpar_Cj
Units	-	Ω	A	(mA)	(Volts)	(μA)	(pF)	(pF)	(Volts)	-	-	(F)
MADP-017025-1314	1.1	1.4	5.1E-15	12.6	175	10	0.38	0.10	0.17	0.50	0.12	2.7E-13
MADP-030025-1314	1.1	1.3	7.8E-15	12.7	175	10	0.80	0.27	0.12	0.50	0.07	5.3E-13

MADP-0XXX15 Series Typical Performance Curves @ +25°C


Ct vs. V

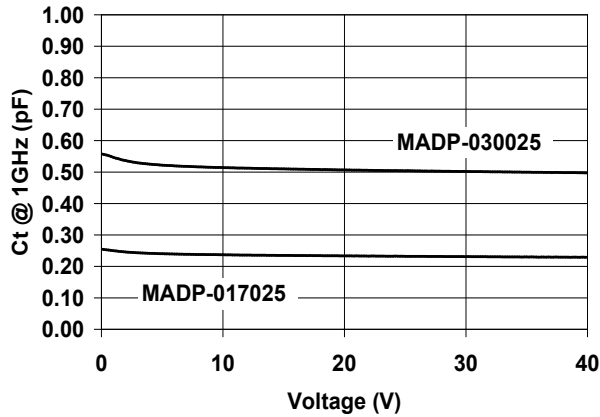


Rs vs. I

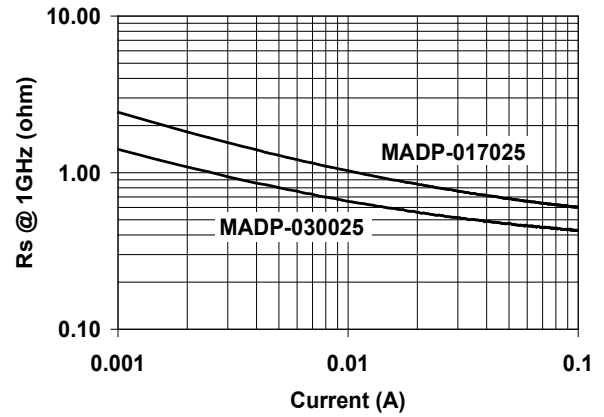


Ct vs. Freq.

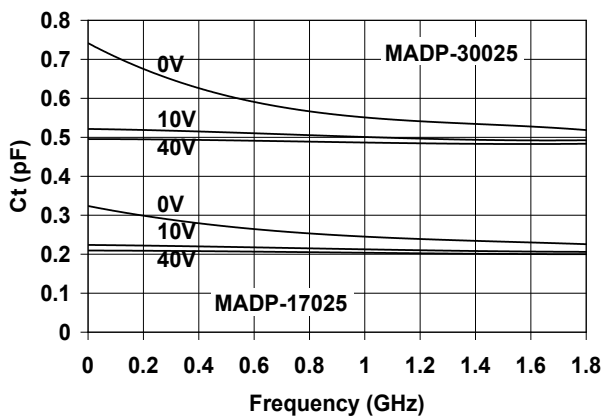


Ls vs. Freq.

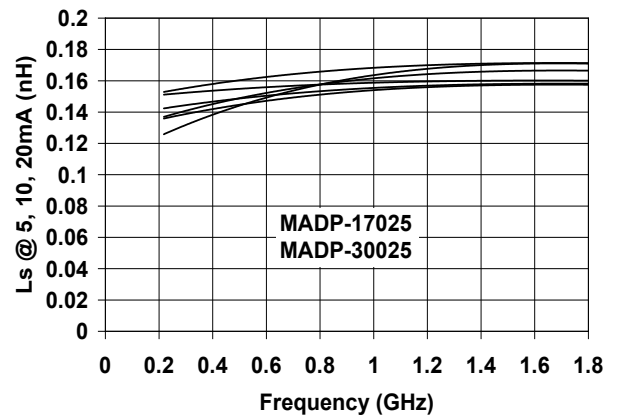

Rs vs. Freq.

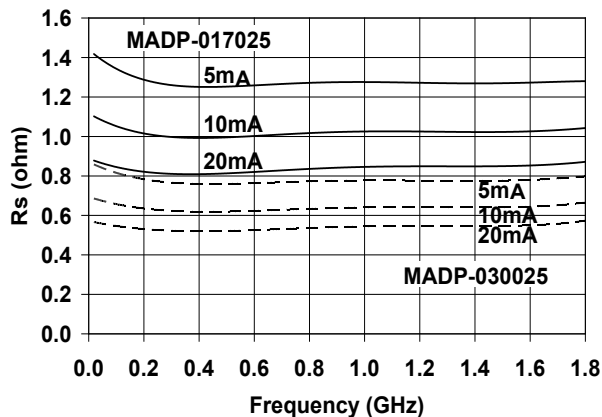

Ls vs. I

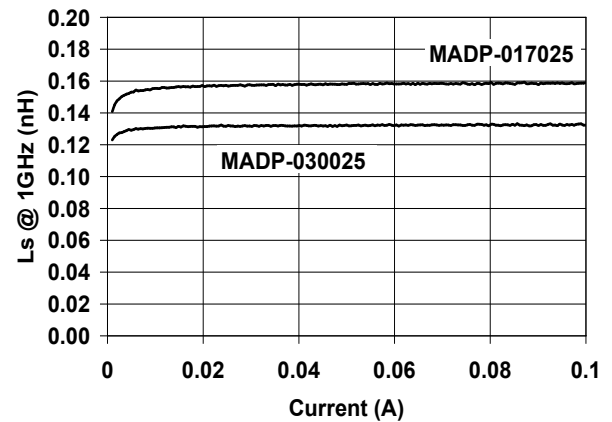

Assembly Guidelines

Handling

All semiconductor chips should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pickups is strongly recommended for individual components. Bulk handling should insure that abrasion and mechanical shock are minimized.

Bonding

Attachment to a circuit board is made simple through the use of surface mount technology. Mounting pads are conveniently located on the bottom surface of these devices and are removed from the active junction locations. These devices are well suited for solder or conductive epoxy attachment onto hard and soft substrates. The use of 60/40, Pb/Sn, 80/20, Au/Sn or any other lead-free solder is recommended to achieve the lowest series resistance and optimum heat sink.

When soldering these devices to a hard substrate, hot gas die bonding is preferred. We recommend utilizing a vacuum tip and applying a force of 40 - 60 grams to the top surface of the device. When soldering, position the die so that its mounting pads are aligned with the circuit board mounting pads and reflow the solder by heating the circuit trace near the mounting pads while applying 40 to 60 grams of force perpendicular to the top surface of the die. Both mounting pads should be heated simultaneously so that the solder under both pads flows at the same time. The solder joint should not be made one at a time. By doing so, would create an un-equal heat flow and potentially create thermal stress to the chip.

Solder reflow should not be performed by causing heat to flow through the top surface of the die. Die should be uniformly heated in a re-flow oven. Proper flow is easily determined looking down from the top since the HMIC glass is transparent and the edges of the mounting pads can be visually inspected through the die after attachment is complete. A typical soldering process profile and handling instructions are provided in Application Notes, [M538 Surface Mounting Instructions](#) and [M541 Bonding and Handling Procedures](#) on the MA-COM website at www.macomtech.com.

Conductive silver epoxy may also be used for die attachment, in lower Incident power applications where the average power is < 1 W. Apply a thin controlled amount approximately 1- 2 mils thick to minimize ohmic and thermal stresses. Take care not to bridge the gap between the chip pads with epoxy. A thin epoxy fillet should be visible around the perimeter of the pads after placement to ensure full coverage. Cure per epoxy per manufacturer's recommended schedule.

Ordering Information

Part Number	Package
MADP-017025-13140G	100 piece gel pack
MADP-017025-13140P	3000 piece reel
MADP-030025-13140G	100 piece gel pack
MADP-030025-13140P	3000 piece reel

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.