

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	2024.04.20

Specifications(规格):

- 1.Voltage rating(额定电压):250V AC DC
- 2.Current rating(额定电流):7.0A AC/DC
- 3.Withstanding voltage(耐压值): $\geq 1500V$ AC/minute
- 4.Insulation resistance(绝缘电阻):1000M Ω Min
- 5.Contact resistance(绝缘电阻):10m Ω Max
- 6.Temperature range(使用温度):-25℃~+85℃





Material(材质):

- 1.Pin material: Brass
- 2.Finished: Tin or GOLD
- 3.Housing material: Nylon-66, UL94V-2
- 4.Housing color: Translucence

PART NO.:

X8672 W V-XX-N2 XX-K2
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-Wafer
- ③ Welding Board Angle:V-Straight 180°
- ④ Row No-Pin: XX-02P~20P
- ⑤ Material:N2-Nylon 66 UL94V-2
- ⑥ Plating:XX:SN-Bright Tin Plated
V01-Gold Flash
- ⑦ K2-natural color
Inserted into the board 3.7mm
Terminal long17.5mm

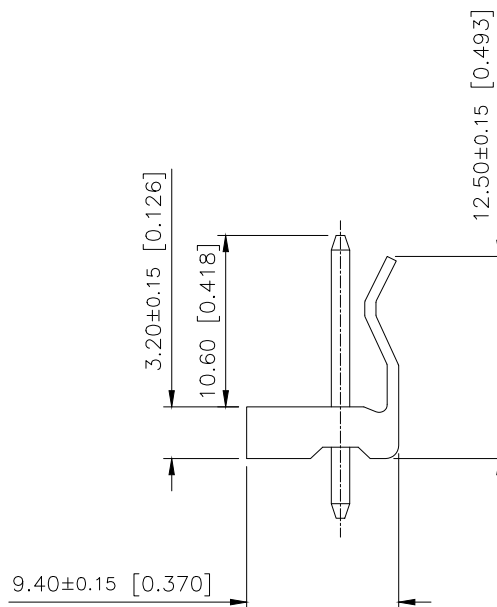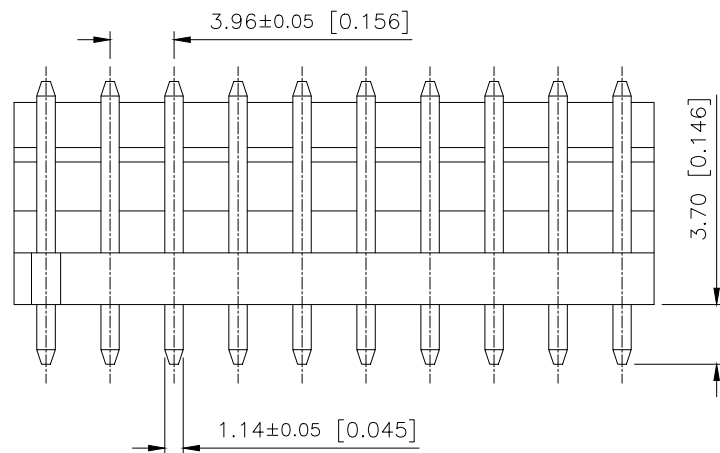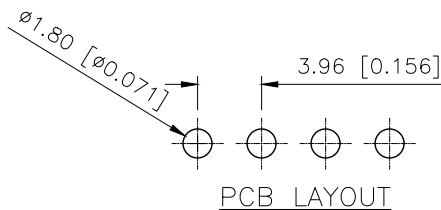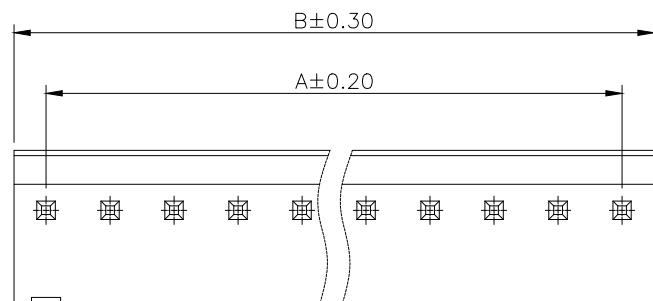

Poles	DIM.A	DIM.B	Poles	DIM.A	DIM.B
02	3.96	7.92	12	43.56	47.52
03	7.92	11.88	13	47.52	51.48
04	11.88	15.84	14	51.48	55.44
05	15.84	19.80	15	55.44	59.40
06	19.80	23.76	16	59.40	63.36
07	23.76	27.72	17	63.36	67.32
08	27.72	31.68	18	67.32	71.28
09	31.68	35.64	19	71.28	75.24
10	35.64	39.60	20	75.24	79.20
11	39.60	43.56			

X8672WV-XX-N2V01-K2	Nylon66 UL 94V-2	BRASS	Gold Flash	X8672H
X8672WV-XX-N2SN-K2			Tin PLATED	
PART NO.	MATERIAL	MATERIAL(PIN)	FINISH(PIN)	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	桑 葚	VIEW:	MODEL TYPE: 3.96mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X8672WV-XX-N2XX-K2
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE N/A	PAGE 1/1	REVISION A0
--------------	-------------	----------------