



M28840/16 Plug Connector



MIL-DTL
28840

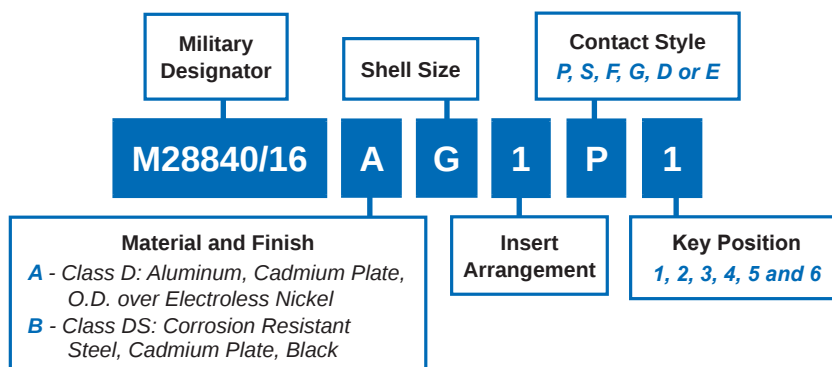


B

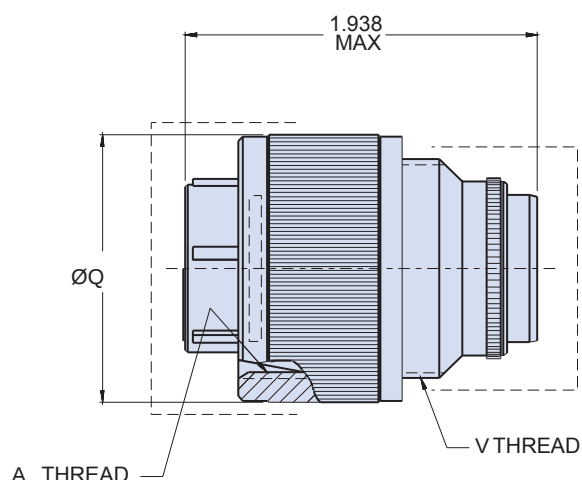


Designator	A Thread Class 2B	V Thread Class 2A	Ø Q Max.
A (11)	.750-1P-.2L-DS	3/4-20 UNEF	1.028 (26.11)
B (13)	.875-1P-.2L-DS	7/8-20 UNEF	1.141 (28.98)
C (15)	1.062-1P-.2L-DS	1-20 UNEF	1.263 (32.08)
D (17)	1.125-1P-.2L-DS	1 1/8-18 UNEF	1.387 (35.23)
E (19)	1.312-1P-.2L-DS	1 1/4-18 UNEF	1.513 (38.43)
F (23)	1.500-1P-.2L-DS	1 7/16-18 UNEF	1.703 (43.26)
G (25)	1.625-1P-.2L-DS	1 9/16-18 UNEF	1.825 (46.36)
H (29)	1.812-1P-.2L-DS	1 7/8-16 UN	2.143 (54.43)
J (33)	2.000-1P-.2L-DS	2 1/16-16 UNS	2.329 (59.16)

**MIL-DTL-28840 Connectors
Standard Insert Arrangements**


Shell Size 11
7 Contacts




Shell Size 13
12 Contacts




Shell Size 15
21 Contacts

B


Shell Size 17
31 Contacts




Shell Size 19
42 Contacts




Shell Size 23
64 Contacts



Shell Size 25
92 Contacts



Shell Size 29
121 Contacts



Shell Size 33
155 Contacts

Insert Arrangements per MIL-STD-1698



MIL-DTL-28840

Shipboard Electrical Connectors

Performance Specifications, Class and Finishes

B

Performance Specifications

Current Rating (Maximum)	Size #20 Contact; 20AWG 7.5A, 22AWG 5.0A, 28AWG 1.5A, 30AWG 1.0A
Test Voltage (Dielectric Withstanding Voltage)	1000 VAC RMS at sea level. Test per EIA-364-20
Insulation Resistance	5000 megohms minimum (at ambient temperature) per EIA-364-21
Contact Resistance	Per SAE-AS39029
Operating Temperature	-55° C. to +200° C.
Fluid Immersion	per test method EIA-364-10
Shock	in accordance with MIL-S-901 grade A
Vibration	per EIA-364-28 test procedure
Magnetic Permeability	2.0 μ (Aluminum), 5.0 μ (Stainless Steel) maximum; ASTM-A342/A342M

Materials and Finishes

Shells, Coupling Nuts, Jam Nuts	Aluminum alloy per ASTM B211, or stainless steel per AMS-QQ-S-763
Contacts	Copper alloy, 50 μ lnch gold plated per ASTM B488 Type 3, Code C, Class 1,27 over nickel underplate per QQ-N-290 Class 2. Socket contact hood: stainless steel, passivated.
Insulators	High Grade Engineering Plastic per ASTM D5948
Contact Retention Clip	Beryllium copper
Shells, Coupling Nuts, Jam Nut Plating Finish	Stainless Steel, Black Cadmium plated
Grommet, Seal	Blended elastomer, 30% silicone per ZZ-R-765, 70% fluorosilicone per MIL-R-25988

Contact Code	Type	Contact Spec.	Contact Size	Acceptable Wire Size	Outside Diameter of Finished Wire	
					Minimum	Maximum
F	Pin	SAE-AS39029/83-508	20-20	24	.040 (1.02)	.070 (1.78)
G	Socket	SAE-AS39029/84-509		22 20		
P	Pin	SAE-AS39029/83-450	20-22	26 24 22		
S	Socket	SAE-AS39029/84-452				
D	Pin	SAE-AS39029/83-451	20-28	32 30 28		
E	Socket	SAE-AS39029/84-453				

Notes

To achieve sealing, wires must be built up to finished wire diameter.
In accordance with MIL-DTL-24643 and MIL-DTL-16878.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

M28840/16AG1P3	M28840/16AG1S3	M28840/16AC1P3	M28840/16AA1F3	M28840/16AA1F4	M28840/16AA1F5
M28840/16AA1F6	M28840/16AA1G2	M28840/16AA1G3	M28840/16AA1G4	M28840/16AA1P1	M28840/16AA1P2
M28840/16AA1P3	M28840/16AA1P4	M28840/16AA1P5	M28840/16AA1P6	M28840/16AA1S1	M28840/16AA1S2
M28840/16AA1S3	M28840/16AB1E1	M28840/16AB1F1	M28840/16AB1F2	M28840/16AB1F3	M28840/16AB1G1
M28840/16AB1G2	M28840/16AB1G3	M28840/16AB1G4	M28840/16AB1P2	M28840/16AB1P4	M28840/16AB1P5
M28840/16AB1P6	M28840/16AB1S2	M28840/16AB1S3	M28840/16AB1S4	M28840/16AB1S5	M28840/16AB1S6
M28840/16AC1F1	M28840/16AC1F2	M28840/16AC1G1	M28840/16AC1G2	M28840/16AC1G3	M28840/16AC1G4
M28840/16AC1G5	M28840/16AC1P2	M28840/16AC1P4	M28840/16AC1P5	M28840/16AC1P6	M28840/16AC1S1
M28840/16AC1S2	M28840/16AC1S4	M28840/16AC1S5	M28840/16AC1S6	M28840/16AD1G1	M28840/16AD1G2
M28840/16AD1G3	M28840/16AD1G4	M28840/16AD1G5	M28840/16AD1P2	M28840/16AD1P3	M28840/16AD1P4
M28840/16AD1S2	M28840/16AD1S3	M28840/16AD1S4	M28840/16AD1S5	M28840/16AD1S6	M28840/16AE1F1
M28840/16AE1G1	M28840/16AE1G2	M28840/16AE1G3	M28840/16AE1G4	M28840/16AE1G5	M28840/16AE1G6
M28840/16AE1P1	M28840/16AE1P2	M28840/16AE1P3	M28840/16AE1P4	M28840/16AE1P5	M28840/16AE1P6
M28840/16AE1S1	M28840/16AE1S2	M28840/16AE1S3	M28840/16AE1S5	M28840/16AF1F1	M28840/16AF1F3
M28840/16AF1G1	M28840/16AF1G2	M28840/16AF1G3	M28840/16AF1G4	M28840/16AF1G5	M28840/16AF1P1
M28840/16AF1P2	M28840/16AF1P3	M28840/16AF1P4	M28840/16AF1P5	M28840/16AF1P6	M28840/16AF1S1
M28840/16AF1S2	M28840/16AF1S3	M28840/16AF1S6	M28840/16AG1B1		