W67-X2Q13-2 • ACTIVE


Potter & Brumfield | Potter & Brumfield W6

TE Internal #: 6-1393252-8 Magnetic, Series Trip, White, Operating Voltage 240 VAC / 415 VAC, 2A Current Rating, 1 Pole, Potter & Brumfield W6, Circuit Breakers

View on TE.com >



Relays & Contactors > Circuit Breakers

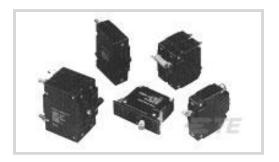

Circuit Breaker Type: Magnetic

Circuit Function: Series Trip

Illuminated: Without

Actuator Color: White

Operating Voltage: 240 VAC, 415 VAC

Features

Product Type Features

Illumination Type	No Light
Actuator Type	Toggle
Circuit Breaker Type	Magnetic

Illuminated

Without

Configuration Features

	.75 x 1.66 in	
Circuit Function	Series Trip	
Number of Poles	1	
Electrical Characteristics		
Operating Voltage	240 VAC, 415 VAC	
Current Rating	2 A	
Interrupt Capacity	5000A @ 277VAC	
Body Features		
Actuator Color	White	
Contact Features		
Trip Time at 200%	.15 – 1.5 seconds	
Termination Features		
Terminal Configuration	6.35 [.25] Straight Quick Connect Tab	

C For support call+1 800 522 6752

W67-X2Q13-2

Magnetic, Series Trip, White, Operating Voltage 240 VAC / 415 VAC, 2A Current Rating, 1 Pole, Potter & Brumfield W6, Circuit Breakers



Mechanical Attachment	
Mounting Options	6-32 Mounting Threads
Dimensions	
	.047 – .11 in
Product Height	50.8 mm[2 in]
dentification Marking	
Stamped Marking Type	International I/O
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold:

Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

W67-X2Q13-2

Magnetic, Series Trip, White, Operating Voltage 240 VAC / 415 VAC, 2A Current Rating, 1 Pole, Potter & Brumfield W6, Circuit Breakers





Also in the Series | Potter & Brumfield W6




Circuit Breakers(70)

Customers Also Bought



TE Part #2-520184-2	TE Part #60249-1	TE Part #1546306-6	TE Part #284506-3
ULTRAFAST 250 ASSY REC 22-18 TPBR LP	FF 250 REC 16-12AWG BR	6P .374" DR BARRIER STRIP	3 POS TERMI-BLOK PLUG STACK 3,

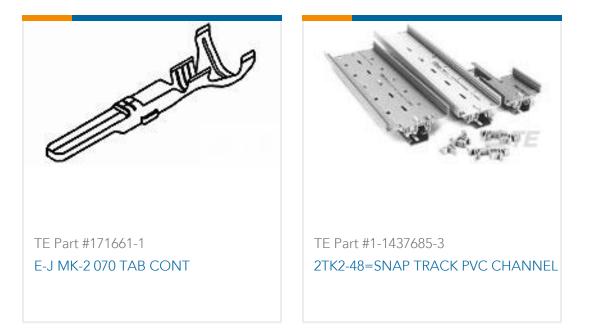

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1393252-8_C.2d_dxf.zip

English

W67-X2Q13-2

Magnetic, Series Trip, White, Operating Voltage 240 VAC / 415 VAC, 2A Current Rating, 1 Pole, Potter & Brumfield W6, Circuit Breakers



Customer View Model

ENG_CVM_CVM_6-1393252-8_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1393252-8_C.3d_stp.zip

English

Customer View Model

ENG_CVM_6-1393252-8_1106.3d_igs.zip

English

Customer View Model

ENG_CVM_6-1393252-8_1106.3d_stp.zip

English

Customer View Model

ENG_CVM_6-1393252-8_1106.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages W6/W9 Magnetic Hydraulic Circuit Breaker

English

Agency Approvals

UL

English