


# AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

## HISTORY

REV.	DATE	DESCRIPTION
B	2.18.15	REDRAWN IN NEW FORMAT, ADDED UL INFORMATION AND LOGO

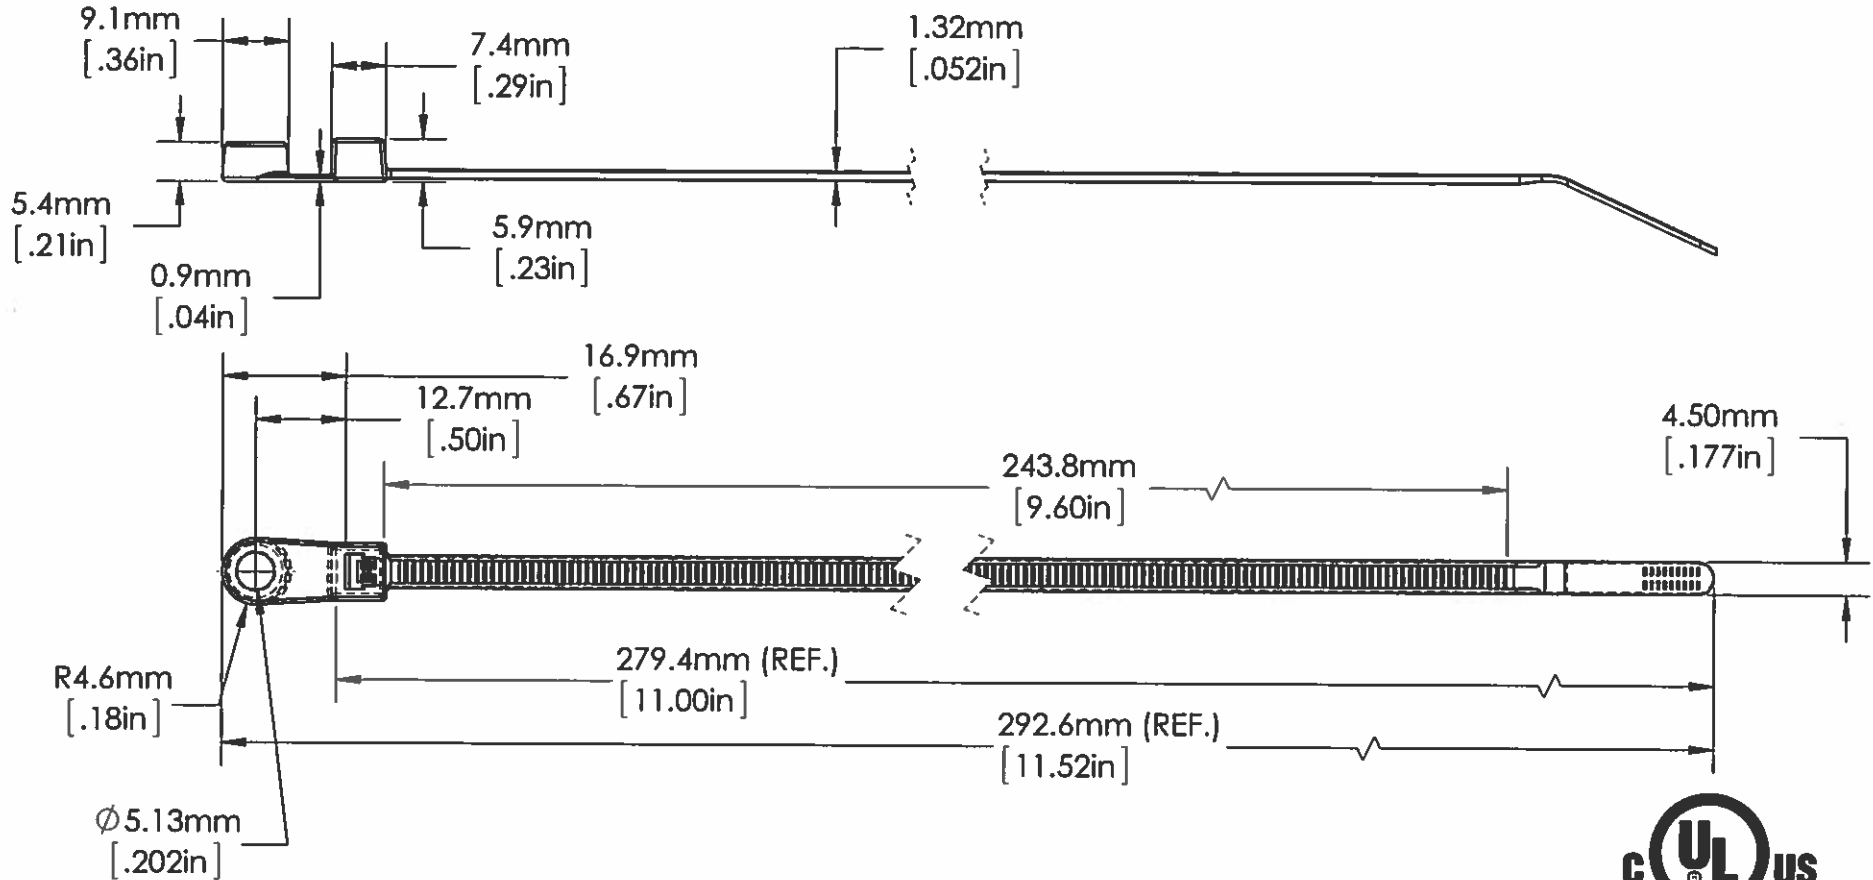

**NOTE: THESE CABLE TIES ARE PLENUM RATED AND HAVE A FLAMMABILITY RATING OF V-2**



**LISTED**

POSITIONING DEVICE  
E57800  
TYPE 21

MOUNTING:	#10 SCREW
LOOP TENSILE STRENGTH:	50 LBF/220 N MIN. PER AS-2319D
OPERATING TEMP RANGE:	-40°F (-40°C) TO 185°F (85°C)
MIN. INSTALLATION TEMP:	32°F (0°C)
WEIGHT:	2.11 g. / (0.07174 oz)
BUNDLE DIAMETER:	Ø 1.6mm TO Ø 76.2mm (0.06" - 3")
TOOL:	12001-0 - HAND TOOL 12500-0 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6-8
PACKAGING:	100/BAG, 1000/CASE

**APPROVALS:** ENG. APPR. *[Signature]* 2-19-15  
Q.A. APPR. *[Signature]* 2-19-15

**SPECIFIED TOLERANCES ARE:**

.XX ± .03 INCHES .X ± .7 MM  
.XXX ± .010 INCHES .XX ± .25 MM  
ANGULAR: ± 2°

MATERIAL  
**NYLON 6/6**  
COLOR  
**NATURAL**



FASTENER DIVISION  
FRIBURG, MA 01420 U.S.A.  
TEL. 1-800-225-5913  
FAX. 978-353-8157

DESCRIPTION: **11" CABLE TIE, STANDARD # 10 SCREW MOUNT**  
STOCK NO. **10354-0**  
REV. **B**

5

4

3

2

1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Avery Dennison:](#)

[10354-0](#)