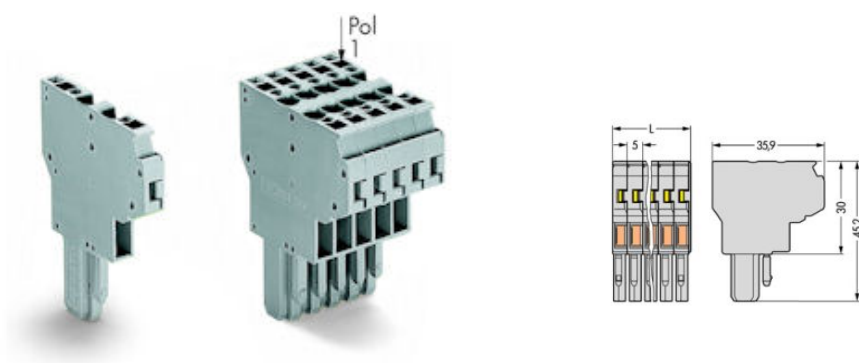

Item no.:	769-135
Product description:	2-CONDUCTOR FEMALE PLUG to be fixed on receptacle terminal blocks or male connectors WITH CODING FINGERS COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED JUMPERS 15 POLE



Produkt kann von Bild abweichen / product may differ

Packing unit 5 pieces

RoHS compliant

Product group	18 (X-COM-SYSTEM)
pole count	15
Cross section [mm ²]	0.08 - 4 mm ²
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP [®] CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	75.592 g
Color	gray
Wiring type	Front-entry
No. of connection Points	30
No. of potentials	15
Height	45.2 mm
Height	1.78 in
Width	75 mm

Width	2.953 in
Depth	35.9 mm
Depth	1.413 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
769-135	ABS	05-HG476175/3-PDA	500	32	4
769-135	CSA	154112-1101144	300	20	28-12
769-135	GL	17295-00HH	500	16	4
769-135	KEMA	2077750.01	500	32	4
769-135	LR	91/20112(E6)	500	16	4
769-135	RMR	11130002	500	16	4
769-135	UR	E45171	600	20	16-12
769-135	UR	E45172	300	20	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected