




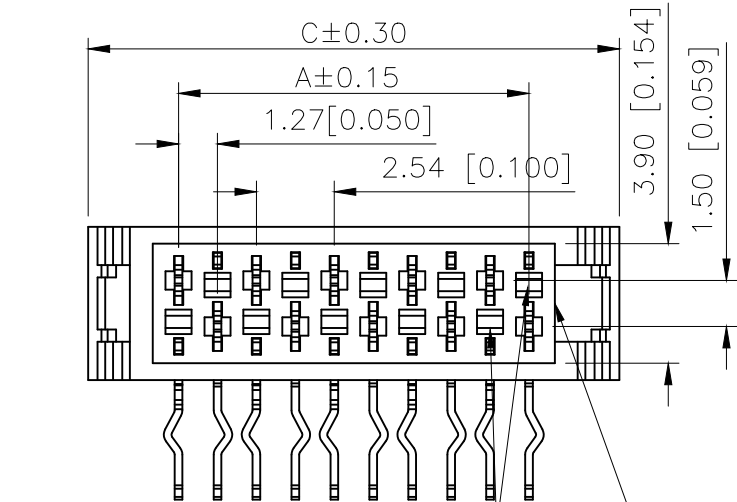

REFERENCE WATING INTERFACE PATTERN:
1.27 SRAGGERED PITCH x 1.5
ROW-DISTANCE.

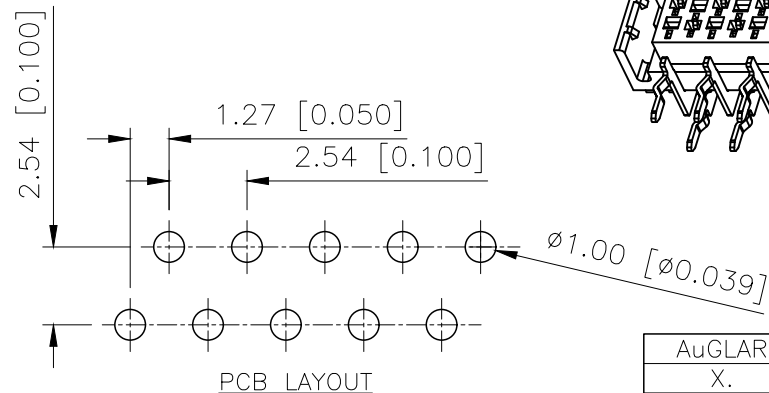

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	

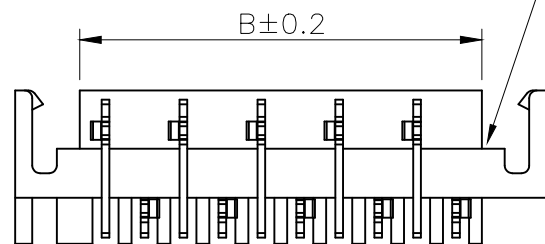

XKB INDUSTRIAL PRECISION CO.,LIMITED

	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.9	阿树

■ SPECIFICATIONS

- Voltage rating:500V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤20mΩ
- After environment testing: ≤30mΩ

PART NO.:

X9127 W R-XX X-PT SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:R-Straight 90°
- ④Row No.Pin No:XX-04~26Pin
- ⑤Plug the Pin & Special No.:
B4-With boss, tail, Ear, Single Concave
- ⑥Material: PT-PBT UL 94V-0
- ⑦Plating Category: SN-Bright tin Plating
- ⑧Color: RE-Red RD-purplish red

Poles	DIM.A	DIM.B	DIM.C	Poles	DIM.A	DIM.B	DIM.C
4	3.81	5.50	9.71	16	19.05	20.74	24.95
6	6.35	8.04	12.25	18	21.59	23.28	27.49
8	8.89	10.58	14.79	20	24.13	25.82	30.03
10	11.43	13.12	17.33	22	26.67	28.36	32.57
12	13.97	15.66	19.87	24	29.21	30.90	35.11
14	16.51	18.20	22.41	26	31.75	33.44	37.65

X9127WR-XXB4-9TSNRD	Purplish	PBT UL 94V-0	Brass	Tin-Plated
X9127WR-XXB4-9TSNRE	RED			
PART NO	Color	Material	Material(Pin)	Finish(Pin)

DESIGN	阿树	VIEW: 	MODEL TYPE: 1.27mm Crimp Style Connectors		
CHECKED		UNIT: mm/in	PART NO.: X9127WR-XXB4-9TSNRE		
APPROVED		SIZE: A4	DWG NO.:		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1