
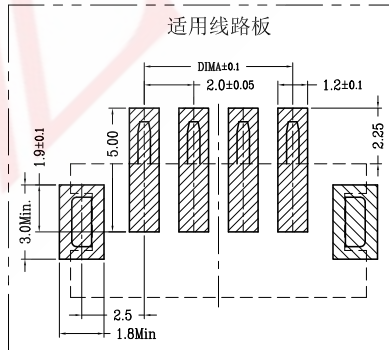
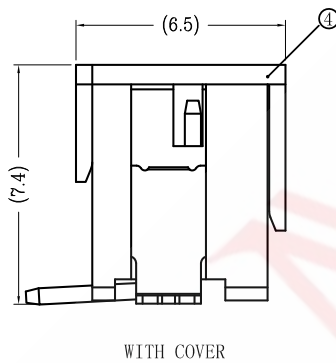
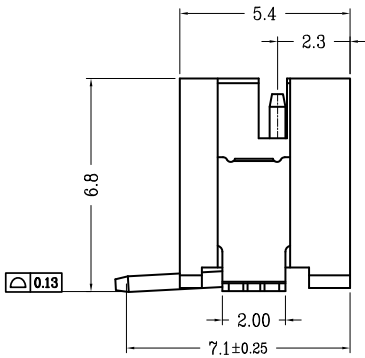
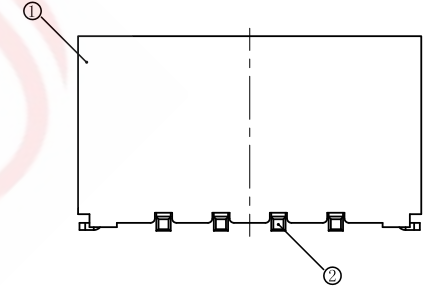

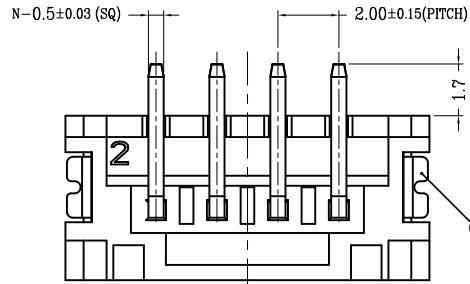


**SAMZO REAC/ROHS**

| REV | ECN NO | DESCRIPTION   | DESIGN | APPROVAL | DATE       |
|-----|--------|---------------|--------|----------|------------|
| A1  | NEW    | Replace frame |        |          | 2013.06.21 |

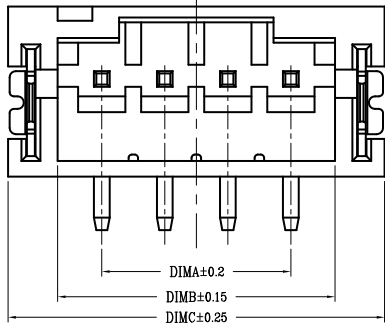


| CKT | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 2   | 2.00  | 4.80  | 7.95  |
| 3   | 4.00  | 6.80  | 9.95  |
| 4   | 6.00  | 8.80  | 11.95 |
| 5   | 8.00  | 10.80 | 13.95 |
| 6   | 10.00 | 12.80 | 15.95 |
| 7   | 12.00 | 14.80 | 17.95 |
| 8   | 14.00 | 16.80 | 19.95 |
| 9   | 16.00 | 18.80 | 21.95 |
| 10  | 18.00 | 20.80 | 23.95 |
| 11  | 20.00 | 22.80 | 25.95 |
| 12  | 22.00 | 24.80 | 27.95 |
| 13  | 24.00 | 26.80 | 29.95 |
| 14  | 26.00 | 28.80 | 31.95 |
| 15  | 28.00 | 30.80 | 33.95 |
| 16  | 30.00 | 32.80 | 35.95 |
| 17  | 32.00 | 34.80 | 37.95 |
| 18  | 34.00 | 36.80 | 39.95 |
| 19  | 36.00 | 38.80 | 41.95 |
| 20  | 38.00 | 40.80 | 43.95 |

**SPECIFICATIONS**


1. The surface of the plastic parts should be smooth, no rough ges, no obvious shrinkage, defects, cracks and other phenomena
2. Current Rating: 3A AC, DC
3. Voltage Rating: 200V AC, DC
4. Temperature Range: -40° C ~ +85° C
5. Contact Resistance: 25mΩ Max
6. Insulation Resistance: 1000MΩ Min
7. Withstanding Voltang: 500V AC/minute

A. SERISE: 6J-PH  
 B. SPACING: K-2.0mm  
 C. MOUNTING: C-LT  
 D. STANDARD: A-WAFER  
 E: PIN: 02-2P (02-20P)  
 F: CODE: 0-REGULAR

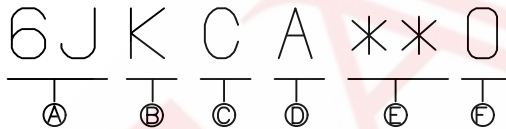

| ITEM | DESCRIPTION | MATERIAL | QTY | FINSH/COLOR |                   |             |            |       |       |
|------|-------------|----------|-----|-------------|-------------------|-------------|------------|-------|-------|
| 1    | 针脚          | 磷铜       | N   | 高温亮锡        |                   |             |            |       |       |
| 2    | 主体          | LCP      | 1   | XXX         | GENERAL TOLERANCE |             |            |       |       |
| 2    | 焊片          | 磷铜       | 1   | 高温亮锡        |                   |             | ≥0~2<      | ±0.15 |       |
|      |             |          |     |             | DESIGN            | WANGGUIFA   | 2018.06.12 | ≥2~5< | ±0.25 |
|      |             |          |     |             | CHECKED           | ZHENGUILAN  | 2018.06.12 | ≥0~2< | ±0.15 |
|      |             |          |     |             | APPROVED          | LILIANJIANG | 2018.06.14 | ≥5    | ±0.35 |

**FIRST VIEW**



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.  
 WWW.KKK-JP.COM

**TITLE::**

**PH2.0-NP-LT**

**DWG NO: 6J-P201**

**PART NO: 6J-2001**

**MODEL NO: 6JKCA\*\*-0**

**NAME:**

**WAFER CONNECTOR**

**SAMZO COMPONENTS**  
 Electronic switch and connector manufacturer

Technical drawing of a wafer connector (PH2.0-NP-LT) showing various views (top, side, cross-section, 3D, and PCB application), dimensions, specifications, and a parts list table. The drawing includes a large watermark 'SAMZO' and a 'FIRST VIEW' diagram of a pin. The parts list table details the components: pins (磷铜), main body (LCP), and solder tabs (磷铜).