

You are here: Products » Heatsinks f.cool » Profile heatsinks and fluid coolers » Standard extruded heatsinks » SK 486 ... » SK 486

Heatsinks f.cool

- Profile heatsinks and fluid coolers
  - Standard extruded heatsinks
  - Extruded heatsinks for lock-in retaining spring
  - Extruded heatsinks for PCB mounting
  - Extruded heatsinks for DC/DC converter
  - Retaining springs for transistors
  - U-Extruded heatsinks
  - Die-cast heatsinks
  - Fin coolers
  - Fluid coolers
  - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- Heatsinks and active heatsinks for processors
- Board Level heatsinks
- Cooling aggregates
- Accessories for electronic components
- Cases f.case
- Connectors f.con

Standard extruded heatsinks


SK 486 ...

SK 486 75 SA

25,8 x 8 mm

Data sheet

add to request

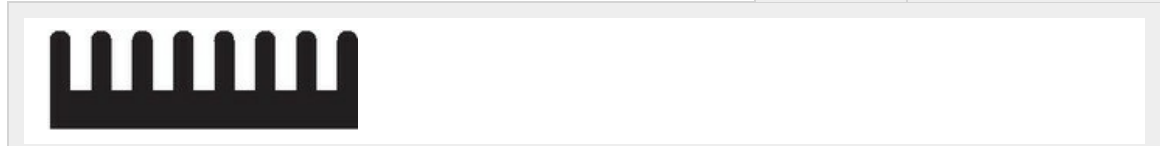

Features Technical Drawing Service

<b>thermal resistance <math>R_{th}</math></b>	14 - 5 K/W
<b>surface</b>	black anodised
<b>height</b>	8 mm
<b>width B</b>	25.8 mm
<b>length</b>	75 mm
<b>plate thickness</b>	3 mm