



HOLE LAYOUT  
TOP VIEW

⊕ 0.05

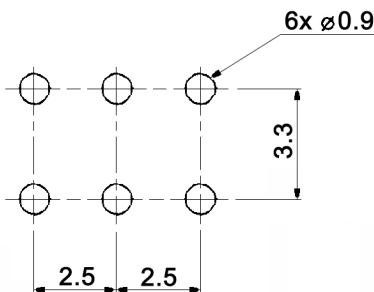

CIRCUIT DIAGRAM  
C: COMMON PIN



**Specifications:**

- Contact rating: 0.3A, 6V DC
- Contact resistance: 70mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: 5 000 cycles
- Operating force: 200 +/-100gf
- Soldering conditions: 260 +/-5°C, 10 +/-1 sec.
- Material: Terminal: brass strip, silver plated  
Cover: SUS, washing  
Case: PPA, black  
Contact plate: SUS, silver plated  
Slider: PA46, black

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	11/10	dr
Slider color	01/22	dr
Rename	12/21	dr
Operating temperature	07/18	dr
Modifications	Date	Name

**MMP 221-R**

**knitter-switch**

**30 22 14**

Page

1/1