

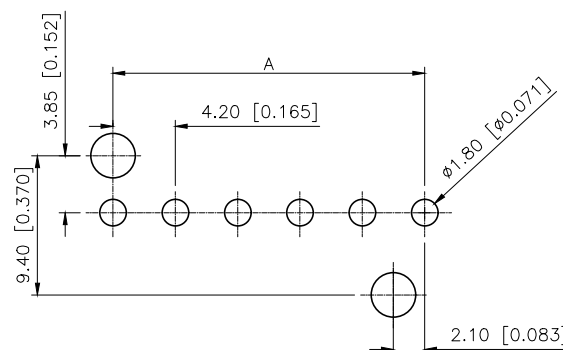
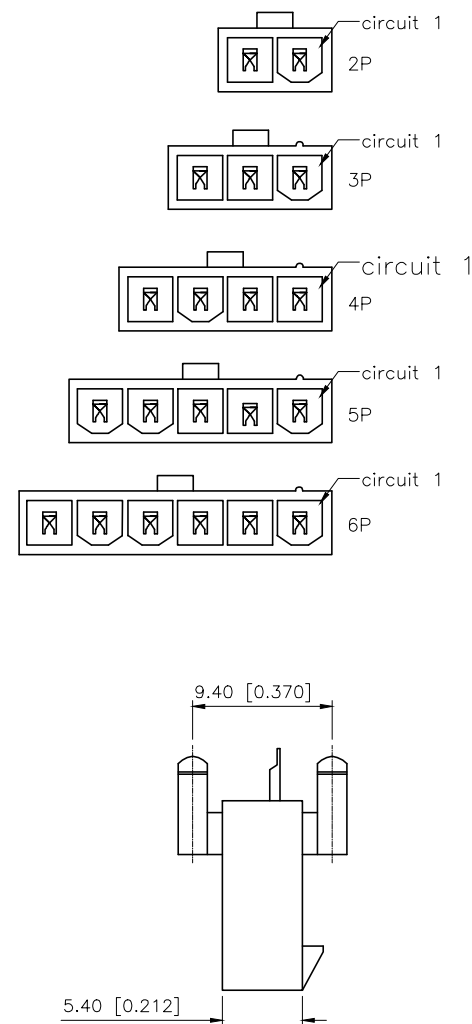


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A1	N/A		图框升级整理图面	2024.07.31

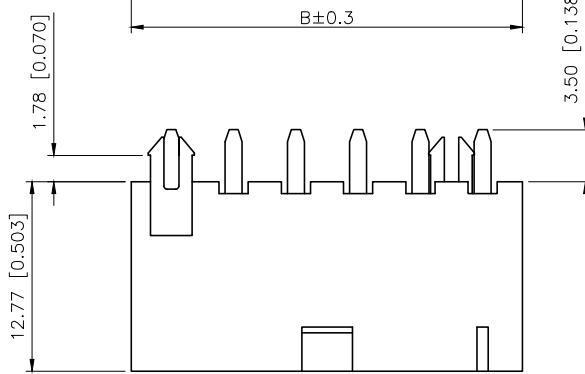

Recommend P.C.B Layout
General Tolerance ± 0.05

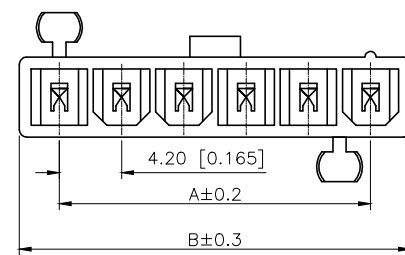

- SPECIFICATIONS
- Voltage rating: 600V AC/DC
 - Current rating: 9A AC/DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -45°C to $+125^{\circ}\text{C}$
 - Insulation resistance: $\geq 1000\text{M}\Omega$
 - Contact resistance: $\leq 10\text{m}\Omega$


PART NO.:
X9357 W V-XX-FS N2 SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No
② Category: W—Wager
③ Welding Board Angle: V—Straight 180°
④ Row No. Pin No: XX—02~06 P
⑤ Plug the Pin&Special No: FS—The hollow needle with positioning column
⑥ Material: N0—PA66 94V-0; N0—PA66-94V-0
N2—PA66 94V-2
⑦ Plating: SN—Bright tin plating
⑧ Color: Blank—natural color

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

X9357WV-XXFS-46SN	Nylon 46 UL 94V-0	Brass	Tin-Plated	X9357H
X9357WV-XXFS-N0SN	Nylon 66 UL 94V-0			
X9357WV-XXFS-N2SN	Nylon 66 UL 94V-2			
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

ANGULAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

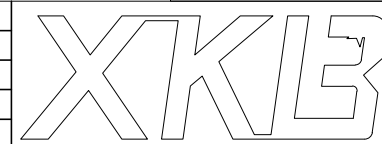

DESIGN	阿树	VIEW:		MODEL TYPE:	4.20 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9357WV-XXFS-N2SN
APPROVED		SIZE:	A4	DWG NO.:	