REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.19	阿树

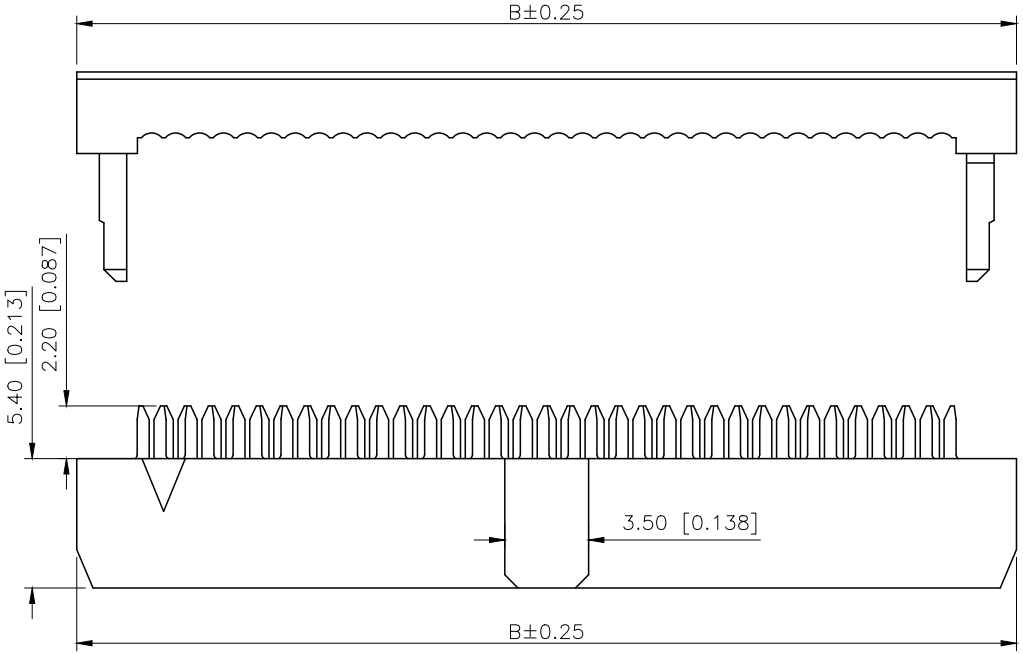

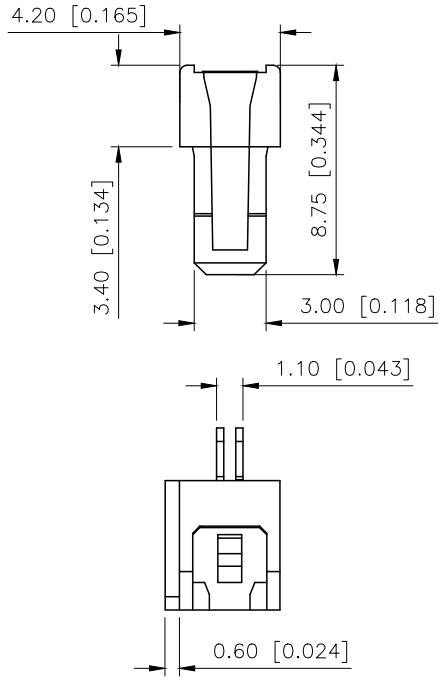

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:1A AC/DC
额定电流：1A AC/DC
Withstanding voltage:500V AC/minute
耐受电压：500V AC/分钟
Temperature range:−40℃−+125℃
温度范围：−40℃−+125℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

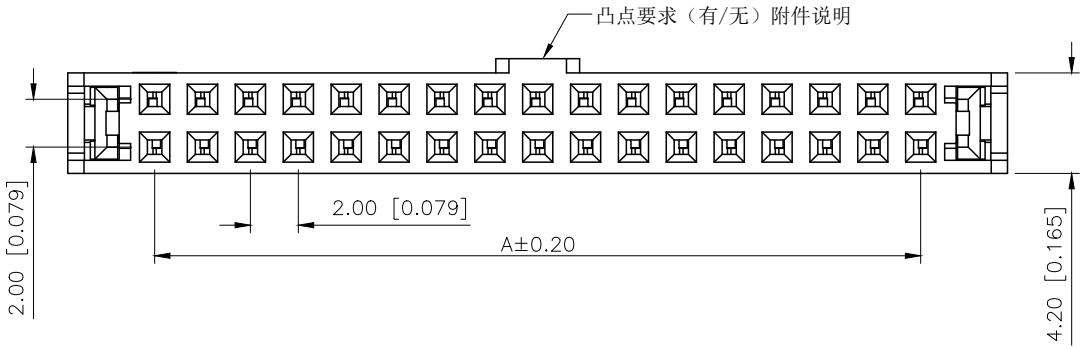

PART NO.:

X2001 H−2xXX−PT V01
① ② ③ ④ ⑤

①Series No
②Category:H−Two−piece
③Row No.Pin No:2xXX−2x03~2x25 Pin
④Material:PT−PBT Glass Fiber UL94V−0
⑤Plating:V01−Gold Flash

POLES	A	B	POLES	A	B
2X03	4.00	11.20	2X12	22.00	29.20
2X04	6.00	13.20	2X13	24.00	31.20
2X05	8.00	15.20	2X14	26.00	33.20
2X06	10.00	17.20	2X15	28.00	35.20
2X07	12.00	19.20	2X17	32.00	39.20
2X08	14.00	21.20	2X18	34.00	41.20
2X09	16.00	23.20	2X20	38.00	45.20
2X10	18.00	25.20	2X22	42.00	49.20
2X11	20.00	27.20	2X25	48.00	55.20

PART NO	Material	Material(Pin)	Suitable XKB Wafer
X2001H−2xXX−PTV01	PBT Glass Fiber	Brass	X2001W−A/X2001W−D

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星创

DESIGN	阿树	VIEW:	MODEL TYPE: 2.0mm IDC Connector
CHECKED		UNIT: mm/in	PART NO.: X2001H−2xXX−PTV01
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1