


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2016460240](#)
Status: **Active**
Overview: [Spot-On Wire-to-Board Connector System](#)
Description: Spot-On Wire-to-Board Header with Nail, 1.50mm Pitch, Dual Row, Vertical, 24 Circuits, Matte Tin (Sn) Plating, Natural

Documents:

3D Model	Application Specification 2016440000-A01 (PDF)
Drawing (PDF)	Packaging Specification 2016469200-200 (PDF)
Product Specification 2016440000-000 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification 2016440000-A00 (PDF)	

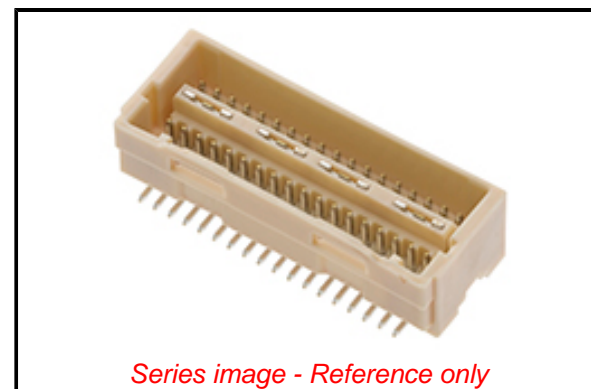

Series image - Reference only

General

Product Family	PCB Headers
Series	201646
3D Viewer	Yes
Application	Signal, Wire-to-Board
CURRENT-MAX-NUMERIC	2.0
Overview	Spot-On Wire-to-Board Connector System
PITCH-MATING-NUMERIC	1.50
Product Name	Spot-On
UPC	889056837439

Physical

Breakaway	No
Circuits (Loaded)	24
Circuits (maximum)	24
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	Polyamide
Net Weight	2329.000/mg
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.50mm
Pitch - Termination Interface	1.50mm
Plating min - Mating	1.000µm
Plating min - Termination	1.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Vacuum Pick-Up Area
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[201646 Series](#)

Mates With

Spot-On Receptacle Housing [201644](#)

Current - Maximum per Contact
Voltage - Maximum

2.0A
100V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	2016440000-A00, 2016440000-A01
Packaging Specification	2016469200-200
Product Specification	2016440000-000
Sales Drawing	2016460001-000

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[201646-0240](#)