




1.5/2.8 Connector System

TE Internal #: 1326030-4  
Receptacle, Mating Tab Width 2.8 mm [.11 in], Tab Thickness .8 mm [.031 in], 12 AWG Wire Size, 1.5/2.8 Connector System, Automotive Terminals

[View on TE.com >](#)

Terminals & Splices > Automotive Terminals > 1.5/2.8 CONNECTOR SYSTEM, RECPT AND TAB

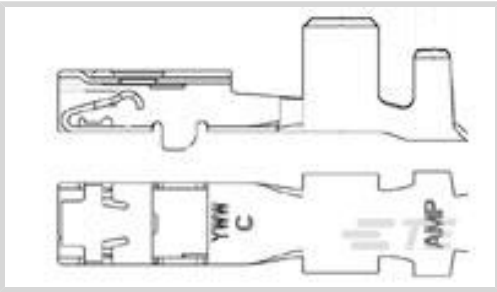

Terminal Type: **Receptacle**  
Mating Tab Width: **2.8 mm [.11 in]**  
Mating Tab Thickness: **.8 mm [.031 in]**  
Wire Size: **3 mm<sup>2</sup>**

[All 1.5/2.8 CONNECTOR SYSTEM, RECPT AND TAB \(39\)](#)

Features

Product Type Features

|                  |      |
|------------------|------|
| Receptacle Style | 180° |
| Sealable         | No   |

Contact Features

|                                                |                  |
|------------------------------------------------|------------------|
| Contact Size                                   | 2.8mm            |
| Contact Fabrication                            | Stamped & Formed |
| Wire Contact Termination Area Plating Material | Tin              |
| Crimp Type                                     | F-Crimp          |
| Terminal Type                                  | Receptacle       |
| Mating Tab Width                               | 2.8 mm[.11 in]   |
| Mating Tab Thickness                           | .8 mm[.031 in]   |
| Interface Plating                              | Tin (Sn)         |

Termination Features

|                                    |       |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
| Product Terminates To              | Wire  |

Dimensions

|                                      |                               |
|--------------------------------------|-------------------------------|
| Compatible Insulation Diameter Range | 1.2 – 4.04 mm[.047 – .161 in] |
| Wire Size                            | 3 mm <sup>2</sup>             |



|                  |        |
|------------------|--------|
| Wire Size Search | 12 AWG |
|------------------|--------|

Usage Conditions

|                             |                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Insulation Option           | Uninsulated                                                                                                                 |
| Operating Temperature (Max) | 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F] |
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F]                                                                                                  |

Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 2300 |
| Packaging Method   | Reel |

Product Compliance


For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1456471-1  
8p Hybrid 0.64/2.8 Unsealed Pl

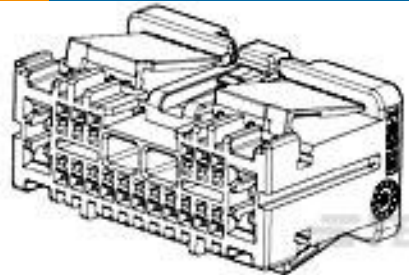

TE Part # 1924126-1  
21p Hybrid - 1pc Unsealed Plug, Key A




TE Part # 1924667-1  
13p Hybrid - 1pc Unsealed Plug, Key A




TE Part # CAT-T319-CH8172  
TH/.025 CONNECTOR SYSTEM, HOUSING



TE Part # 1438759-1  
22WAY HYBRID .040/2.8 PLUG ASSY KEY 'B'

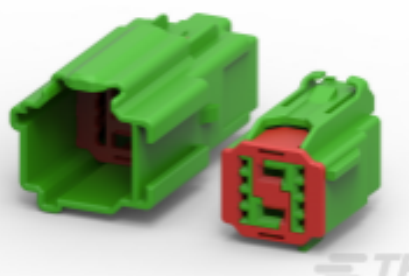


TE Part # CAT-G3353-CH8172  
GET .64 CONNECTOR SYSTEM, CONNECTOR HSG

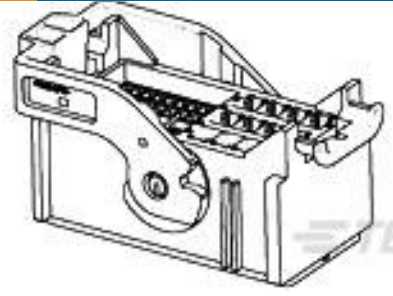

TE Part # 776932-1  
52 pos plug assy, 0.64 and 2.8



TE Part # 1452842-3  
22 POS FEMALE HSG ASSY



TE Part # 776932-3  
52 pos plug, 0.64 and 2.80mm



TE Part # 1326359-1  
11P 2.8MM LVG-HNG PLUG - KEY A



TE Part # 1438759-2  
22Way Hybrid 040/2.8 Plug Assy Key "C"



TE Part # 2203937-1  
52 pos plug assy, 0.64 and 2.8



TE Part # 2203937-5  
52 pos plug assy, 0.64 and 2.8


Also in the Series | 1.5/2.8 Connector System



Automotive Connector Caps & Covers (4)



Automotive Housings(27)

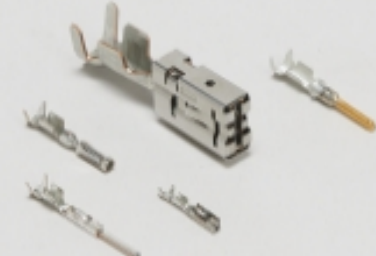

Automotive Terminals(50)



Insertion & Extraction Tools(1)



Other Automotive Connector Accessories(1)




PCB Headers & Receptacles(1)

Customers Also Bought



TE Part #1745068-1  
3 POS. MCP 1,5 SRS. REC. CONNECTOR UNSLD.

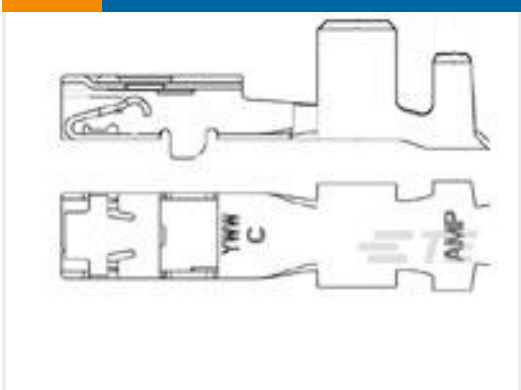


TE Part #1326030-3  
2.8MM RECP,UNSEAL,14-16AWG



TE Part #2098835-1  
20P HYBRID HEADER ASSEMBLY KEY



TE Part #1563307-1  
24 WAY MIXED CONNECTOR REC HSG ASSY

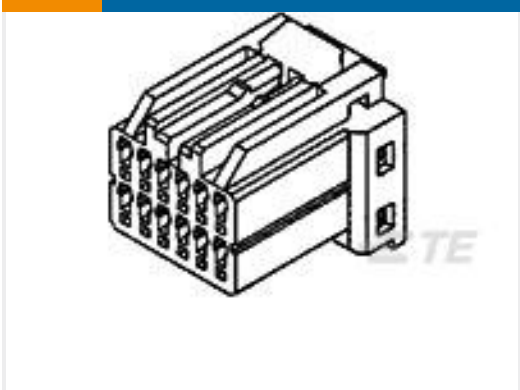

TE Part #174910-2  
040 MLC PLUG HSG 20P



TE Part #638393-5  
10P PLUG ASSY A KEY -W/ CPA



TE Part #1745011-1  
PANEL HOOK



TE Part #1927688-3  
ASSY, 1X6,GET RA HDR, KEY C



TE Part #2272006-2  
Plug Assembly, 20P GET, w/ CPA



TE Part #570055-000  
BL-POLY125-16-0-90MM

Documents

Product Drawings

2.8MM RECP,UNSEAL,10-12AWG

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1326030-4\_L.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_1326030-4\\_L.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1326030-4\\_L.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1326030-4\\_H1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1326030-4\\_H1.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1326030-4\\_H1.2d\\_dxf.zip](#)

English

[3D PDF](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

[Product Specifications](#)

[Application Specification](#)

English