




Heyco-Flex™ VI Liquid Tight Conduit

Flexible, PVC/Metal Liquid Tight Electrical Conduit (LFMC)

TRADE SIZE	PART NO. Gray	DESCRIPTION	PART DIMENSIONS				STANDARD COIL LENGTH
			A Outside Diameter		B Inside Diameter		
			in.	mm.	in.	mm.	
3/8	8457	HF6 3/8 LFMC	.70	17,8	.49	12,5	100
1/2	8458	HF6 1/2 LFMC	.83	21,1	.63	16,1	
3/4	8459	HF6 3/4 LFMC	1.04	26,4	.83	21,1	
1	8460	HF6 1 LFMC	1.30	33.1	1.04	26.4	

Standard color gray. Consult Heyco for black and other colors.

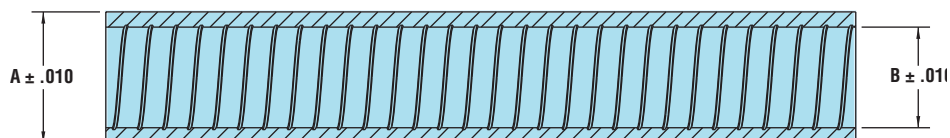

- Constructed of PVC jacketed, continuously interlocked hot dipped zinc galvanized steel core for exceptional crush and corrosion resistance.
- Used with standard liquid-tight fittings (page 2-16) for easy installation.
- IP 67 Rated when installed with approved connectors.
- Durable, sunlight resistant and flame retardant thermoplastic PVC jacket that resists heat, oil, and chemical breakdown.
- Approved for both exposed and concealed locations, direct burial and in concrete.
- Approved as an equipment grounding conductor if the total grounding path is 6 ft. or less and the circuit conductors are protected by over 20 amps for 3/8" and 1/2" and 60 amps or less for 3/4" through 1-1/4".
- Suitable for use in hazardous locations per NEC Articles 501 Class I Div. 2, Article 502 Class II Div. 1 & 2, Article 503 Class III Div. 1 & 2.
- Complies with UL Standard 360 File No. E18917; CSA C22.2 File No. 158897; and NEC Article 350.
- DFARS Compliant

Quick Specs

Material	PVC jacket with zinc galvanized steel core
Certifications	<ul style="list-style-type: none"> UL Listed under the Component Program of Underwriters' Laboratories File E469210 SP Certified by Canadian Standards Association File 260992
Temperature Range	-4°F (-20°C) to 140°F (60°C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[8460](#) [8458](#) [8457](#) [8459](#)