



# Plas-Tech® 30

Pan CR (Z) (PR30)

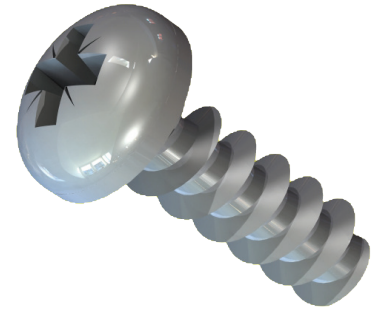

## Steel/Zinc & Clear (CR3)

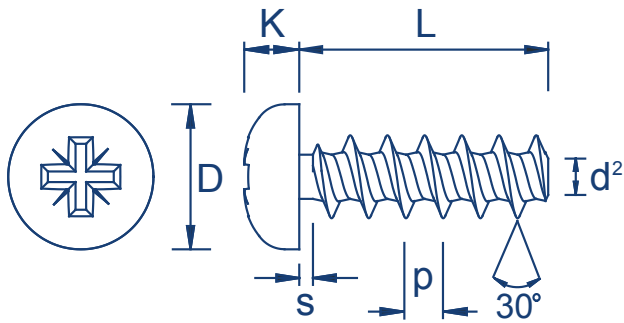

## Dimensions (Metric)

Thread Dimensions	Screw Size	2.2	2.5	3.0	3.5	4.0	5.0	6.0
	d2 nom.	1.25	1.40	1.66	1.91	2.17	2.68	3.19
	p	0.98	1.12	1.34	1.57	1.79	2.24	2.69
	s (L > 3 x d1)	2.2	2.5	3.0	3.5	4.0	5.0	6.0
	s (L < 3 x d1)	1.1	1.3	1.5	1.8	2.0	2.5	3.0
Recommended Hole Size mm		1.54 - 1.87	1.75 - 2.12	2.10 - 2.55	2.45 - 2.97	2.80 - 3.40	3.50 - 4.25	4.20 - 5.10
Head Dimensions	D	3.9	4.4	5.3	6.1	7.0	8.8	10.5
	K	1.5	1.7	2.0	2.5	2.7	3.4	4.0
	Recess No.	1	1	1	2	2	2	3

## Preferred Lengths and Part Numbers (Metric)

		Length (L)												
		5	6	8	10	12	14	16	18	20	25	30	35	40
Screw Size	2.2													
	2.5													
	3.0		3.06 PRST30 TC1D	3.08 PRST30 TC1D	3.010 PRST30 TC1D	3.012 PRST30 TC1D	3.014 PRST30 TC1D	3.016 PRST30 TC1D	3.018 PRST30 TC1D	3.020 PRST30 TC1D	3.025 PRST30 TC1D	3.030 PRST30 TC1D		
	3.5			3.58 PRST30 TC1D	3.510 PRST30 TC1D	3.512 PRST30 TC1D		3.516 PRST30 TC1D	3.518 PRST30 TC1D	3.520 PRST30 TC1D	3.525 PRST30 TC1D	3.530 PRST30 TC1D	3.535 PRST30 TC1D	
	4.0			4.08 PRST30 TC1D	4.010 PRST30 TC1D	4.012 PRST30 TC1D	4.014 PRST30 TC1D	4.016 PRST30 TC1D		4.020 PRST30 TC1D	4.025 PRST30 TC1D	4.030 PRST30 TC1D		
	5.0				5.010 PRST30 TC1D	5.012 PRST30 TC1D		5.016 PRST30 TC1D		5.020 PRST30 TC1D	5.025 PRST30 TC1D	5.030 PRST30 TC1D		
	6.0													

Driver bits are available from stock for all screw sizes