



Overload relay 6...25 A Electronic For motor protection Size S0, Class 5...30  
 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: Spring-type  
 terminal Manual-Automatic-Reset Internal ground fault detection

<b>product brand name</b>	SIRIUS
<b>product designation</b>	solid-state overload relay
<b>product type designation</b>	3RB3
<b>General technical data</b>	
<b>size of overload relay</b>	S0
<b>size of contactor can be combined company-specific</b>	S0
power loss [W] for rated value of the current at AC in hot operating state	1.7 W
• per pole	0.57 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for protective separation</b>	
• in networks with ungrounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with ungrounded star point between main and auxiliary circuit	600 V
• in networks with grounded star point between main and auxiliary circuit	690 V
<b>shock resistance</b>	15g / 11 ms
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
<b>thermal current</b>	25 A
<b>reference code according to IEC 81346-2</b>	F
<b>Substance Prohibitance (Date)</b>	10/01/2009
<b>SVHC substance name</b>	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
<b>temperature compensation</b>	-25 ... +60 °C
relative humidity during operation	10 ... 95 %
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>adjustable current response value current of the current-dependent overload release</b>	6 ... 25 A
<b>operating voltage</b>	
• rated value	690 V
• for remote-reset function at DC	24 V

<ul style="list-style-type: none"> <li>at AC-3e rated value maximum</li> </ul>	690 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>operational current rated value</b>	25 A
operational current at AC-3e at 400 V rated value	25 A
<b>operating power</b>	
<ul style="list-style-type: none"> <li>for 3-phase motors at 400 V at 50 Hz</li> </ul>	3 ... 11 kW
<ul style="list-style-type: none"> <li>for AC motors at 500 V at 50 Hz</li> </ul>	4 ... 15 kW
<ul style="list-style-type: none"> <li>for AC motors at 690 V at 50 Hz</li> </ul>	5.5 ... 22 kW
<b>Auxiliary circuit</b>	
<b>design of the auxiliary switch</b>	integrated
<b>number of NC contacts for auxiliary contacts</b>	1
<ul style="list-style-type: none"> <li>note</li> </ul>	for contactor disconnection
<b>number of NO contacts for auxiliary contacts</b>	1
<ul style="list-style-type: none"> <li>note</li> </ul>	for message "tripped"
number of CO contacts for auxiliary contacts	0
<b>operational current of auxiliary contacts at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	4 A
<ul style="list-style-type: none"> <li>at 110 V</li> </ul>	4 A
<ul style="list-style-type: none"> <li>at 120 V</li> </ul>	4 A
<ul style="list-style-type: none"> <li>at 125 V</li> </ul>	4 A
<ul style="list-style-type: none"> <li>at 230 V</li> </ul>	3 A
<b>operational current of auxiliary contacts at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 60 V</li> </ul>	0.55 A
<ul style="list-style-type: none"> <li>at 110 V</li> </ul>	0.3 A
<ul style="list-style-type: none"> <li>at 125 V</li> </ul>	0.3 A
<ul style="list-style-type: none"> <li>at 220 V</li> </ul>	0.11 A
<b>Protective and monitoring functions</b>	
<b>trip class</b>	CLASS 5E, 10E, 20E and 30E adjustable
<b>design of the overload release</b>	electronic
response value current of the grounding protection minimum	0.75 x IMotor
<b>response time of the grounding protection in settled state</b>	1 000 ms
<b>operating range of the grounding protection relating to current set value</b>	
<ul style="list-style-type: none"> <li>minimum</li> </ul>	IMotor > lower current setting value
<ul style="list-style-type: none"> <li>maximum</li> </ul>	IMotor < upper current setting value x 3.5
<b>UL/CSA ratings</b>	
<b>full-load current (FLA) for 3-phase AC motor</b>	
<ul style="list-style-type: none"> <li>at 480 V rated value</li> </ul>	25 A
<ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>	25 A
<b>contact rating of auxiliary contacts according to UL</b>	B600 / R300
<b>Short-circuit protection</b>	
<b>design of the fuse link</b>	
<ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> </ul> </li> <li>with type of assignment 2 required</li> </ul>	gG: 125 A, RK5: 100 A gG: 63 A, J: 100 A
<ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gG: 6 A
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	Contacting mounting
<b>height</b>	109 mm
<b>width</b>	45 mm
<b>depth</b>	85 mm
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>for main current circuit</li> </ul>	spring-loaded terminals
<ul style="list-style-type: none"> <li>for auxiliary and control circuit</li> </ul>	spring-loaded terminals
<b>arrangement of electrical connectors for main current circuit</b>	Top and bottom

type of connectable conductor cross-sections for main contacts	<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>	1x (1 ... 10 mm <sup>2</sup> ) 1x 10 mm <sup>2</sup> 1x (1 ... 10 mm <sup>2</sup> ) 1x (1 ... 6 mm <sup>2</sup> ) 1x (1 ... 6 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b>		
<ul style="list-style-type: none"> <li>• for auxiliary contacts             <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>		2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0,25 ... 1,5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 1x (24 ... 16), 2x (24 ... 16)
<b>design of screwdriver shaft</b>		Diameter 5 to 6 mm
<b>size of the screwdriver tip</b>		Pozidriv PZ 2
<b>design of the thread of the connection screw</b>		
<ul style="list-style-type: none"> <li>• for main contacts</li> </ul>		M4

<b>Electrical Safety</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front

**Communication/ Protocol**

<b>type of voltage supply via input/output link master</b>	No
--	----

**Electromagnetic compatibility**

<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> <li>• due to high-frequency radiation according to IEC 61000-4-6</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge

**Display**

display version for switching status	Slide switch
--------------------------------------	--------------

**Approvals Certificates**

**General Product Approval**



[Confirmation](#)



<b>EMV</b>	<b>For use in hazardous locations</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>
------------	---------------------------------------	--------------------------	--------------------------



[KC](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



<b>Marine / Shipping</b>	<b>other</b>	<b>Environment</b>
--------------------------	--------------	--------------------



[Confirmation](#)

[Environmental Confirmations](#)

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3123-4QE0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3123-4QE0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3123-4QE0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3123-4QE0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3123-4QE0&lang=en)



Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3123-4QE0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3123-4QE0&objecttype=14&gridview=view1>

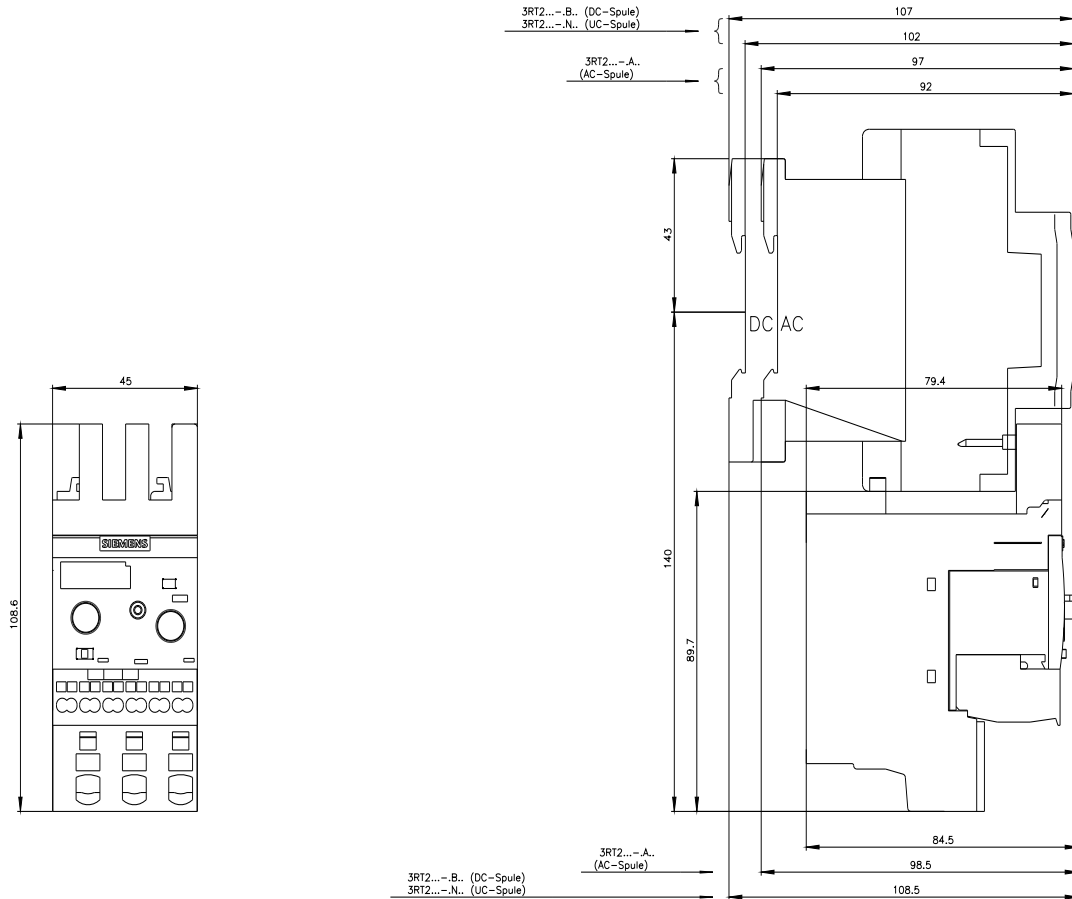

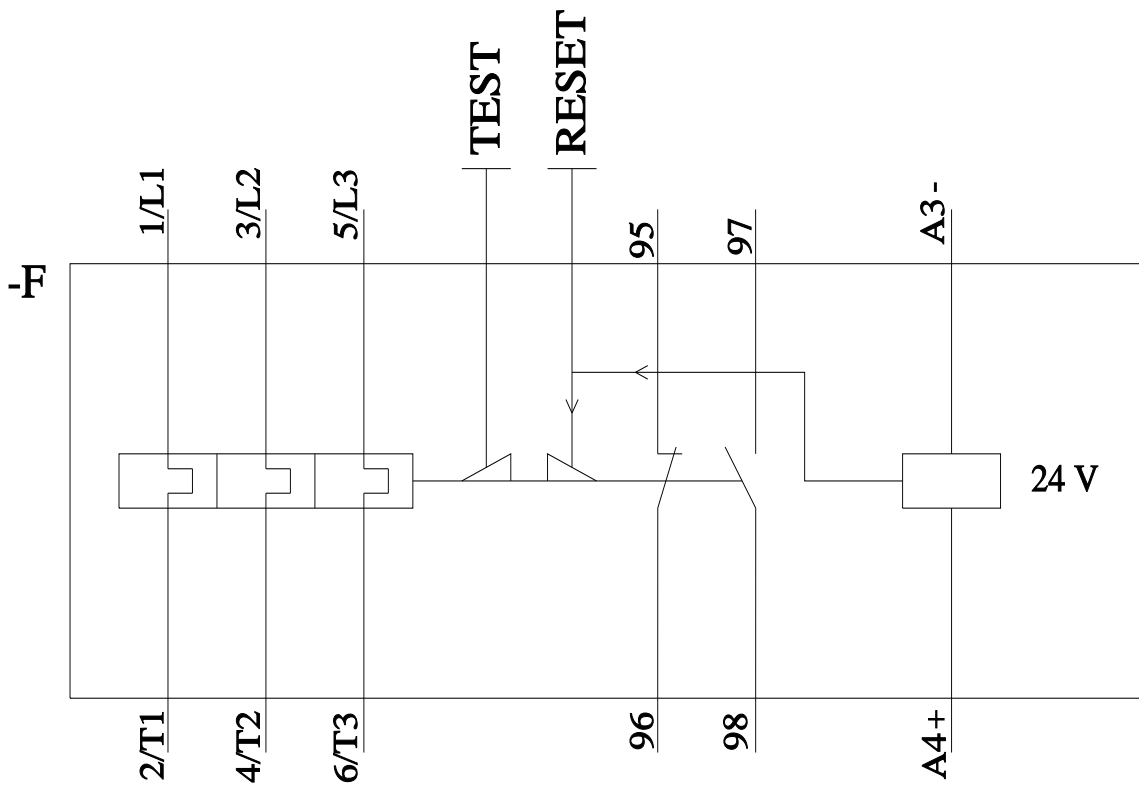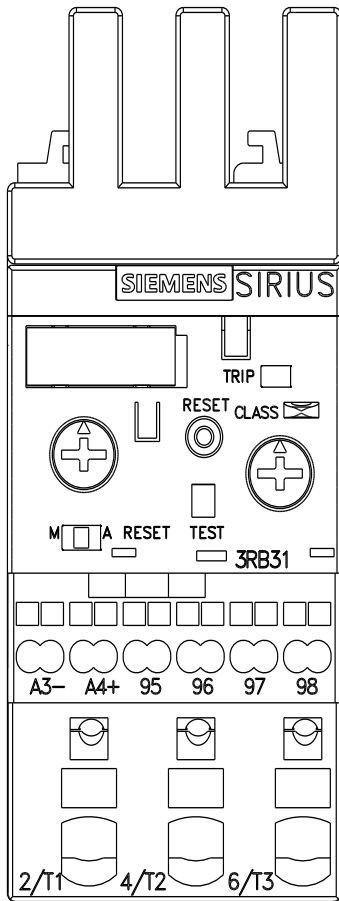

last modified:

3/11/2024