


Recommended P.C.B Layout

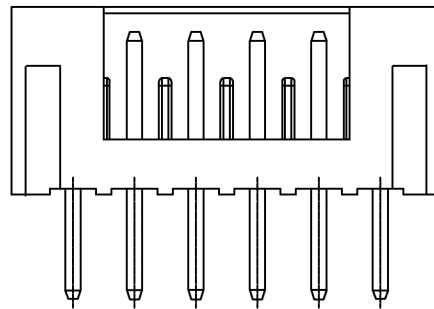

Specifications:

规格:

- Voltage rating: 100V AC/DC
- 额定电压: 100V AC/DC
- Current rating: 2A AC/DC
- 额定电流: 2A AC/DC
- Withstanding voltage: 800V AC/minute
- 耐受电压: 800V AC/分钟
- Temperature range: -25°C~+85°C
- 温度范围: -25°C~+85°C
- Insulation resistance: 1000MΩ min
- 绝缘电阻: 1000MΩ Min
- Contact resistance: 20mΩ Max
- 接触电阻: 20mΩ Max

X2016 W V - XX - 46 SN  
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: W-Wafer
3. Welding Board Angle: V-Stright 180°
4. Row No. Pin No: XX-02~12P
5. Material: 46-PA46 UL94V-0
6. Plating: SN-Bright Tin Plating

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.00	6.00	8	14.00	18.00
3	4.00	8.00	9	16.00	20.00
4	6.00	10.00	10	18.00	22.00
5	8.00	12.00	11	20.00	24.00
6	10.00	14.00	12	22.00	26.00
7	12.00	16.00			

X2016WV-XX-46SN	PA46	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

广东星坤科技股份有限公司



Δ姓	日期
Δ数	
ΔX	

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGULAR ±5°
					L ≤ 4 ±0.2
					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5



DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN	VIEW:	PART NO.: X2016WV-XX-46SN
CHKD	UNIT: mm/in	DWG NO.: X-X2016WV-XX-46SN
APPD	SIZE: A4	WEIGHT SHEET REVISION
XKB INDUSTRIAL PRECISION CO., LIMITED		1/1 A0

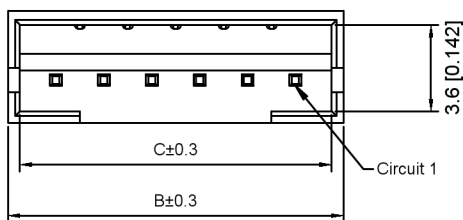


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20m Ω



X2016 W V-XX K- N0 SN

① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Straight 180°
- ④ Row No.-Pin No.: XX-02P~20P
- ⑤ Plug the Pin & Special No.:K-Kink;K1-Reverse Kink;
- ⑥ Material : N0-PA66 94V-0
- ⑦ Plating Category: Sn-Bright Tin Plating;V01-Gold Flash

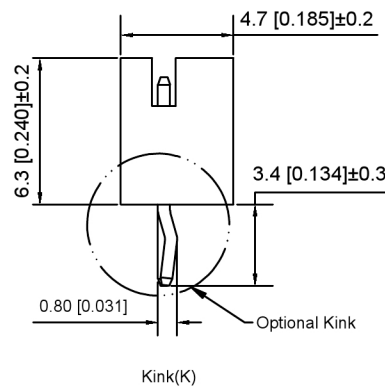

02~05Pin K 位置在两边第一针  
06~N Pin K 位置在两边第二针

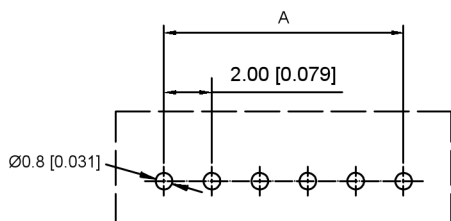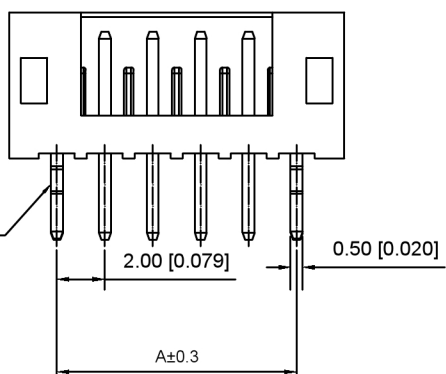

Recommended P.C.B Layout  
General Tolerance±0.05



Reverse Kink(K1)

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.80	12	22.00	26.00	24.80
03	4.00	8.00	6.80	13	24.00	28.00	26.80
04	6.00	10.00	8.80	14	26.00	30.00	28.80
05	8.00	12.00	10.80	15	28.00	32.00	30.80
06	10.00	14.00	12.80	16	30.00	34.00	32.80
07	12.00	16.00	14.80	17	32.00	36.00	34.80
08	14.00	18.00	16.80	18	34.00	38.00	36.80
09	16.00	20.00	18.80	19	36.00	40.00	38.80
10	18.00	22.00	20.80	20	38.00	42.00	40.80
11	20.00	24.00	22.80				

X2016WV-XXK-N0V01			Gold-Flash	X2016H
X2016WV-XXK-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2016WV-XXK-N0SN
CHKD		UNIT: mm/in	DWG NO.: X-X2016WV-XXK-N0SN
APPD		SIZE: A4	









XKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	

广东星坤科技股份有限公司

Δ*	日期
Δx	日期
Δx	日期
MARK	DESCRIPTION
文件	工程章

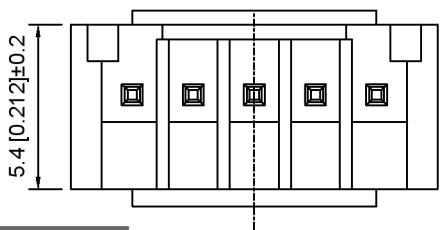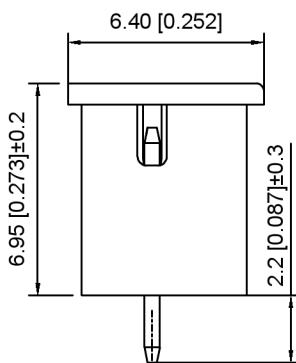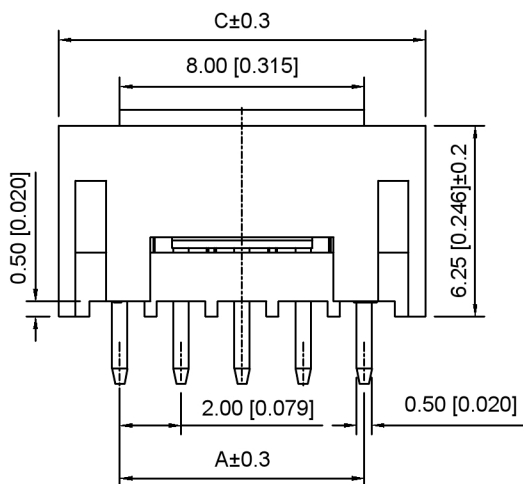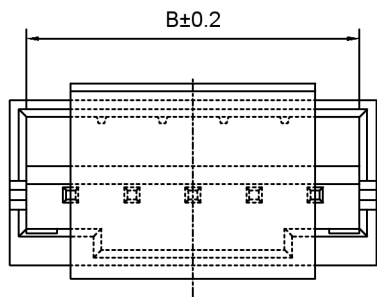

Recommended PCB Layout(Top view)  
Tolerance:±0.05mm

Specifications:

规格:  
Voltage rating:250V AC/DC  
额定电压: 250V AC/DC  
Current rating:2A AC/DC  
额定电流: 2A AC/DC  
Withstanding voltage:1000V AC/minute  
耐受电压: 1000V AC/分钟  
Temperature range:-25℃~+105℃  
温度范围: -25℃~+105℃  
Insulation resistance:≥1000MΩ  
绝缘电阻: ≥1000MΩ  
Contact resistance:≤20mΩ  
接触电阻: ≤20mΩ

X2016 W V-XX R-LP SN  
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Stright 180°
- 4.Row No.Pin No:XX-02~16Pin
- 5.Special No:R-DIP 2.2mm
- 6.Material:LP-LCP UL94V-0 ,Natural
- 7.Plating:SN- Tin Plated

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	4.90	6.00	10	18.00	20.90	22.00
03	4.00	6.90	8.00	11	20.00	22.90	24.00
04	6.00	8.90	10.00	12	22.00	24.90	26.00
05	8.00	10.90	12.00	13	24.00	26.90	28.00
06	10.00	12.90	14.00	14	26.00	28.90	30.00
07	12.00	14.90	16.00	15	28.00	30.90	32.00
08	14.00	16.90	18.00	16	30.00	32.90	34.00
09	16.00	18.90	20.00				

X2016WV-XXR-LPSN	LCP	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2016WV-XXR-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X2016WV-XXR-LPSN
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0








XKB INDUSTRIAL PRECISION CO.,LIMITED

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
文件	工程章			

REVISIONS	UNSPECIFIED TOLERANCES

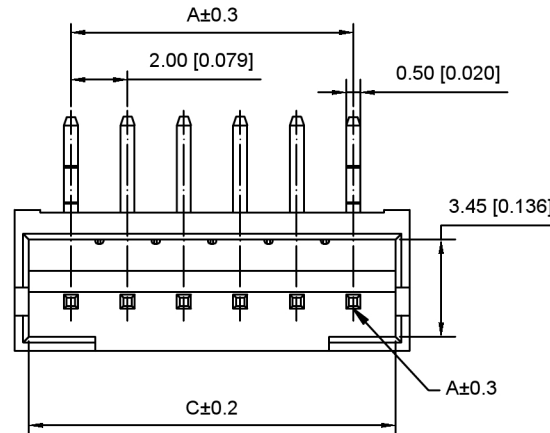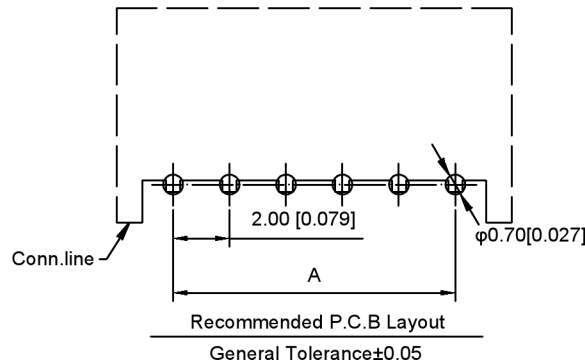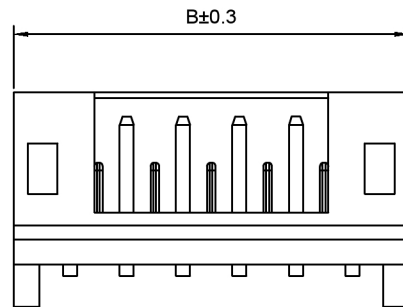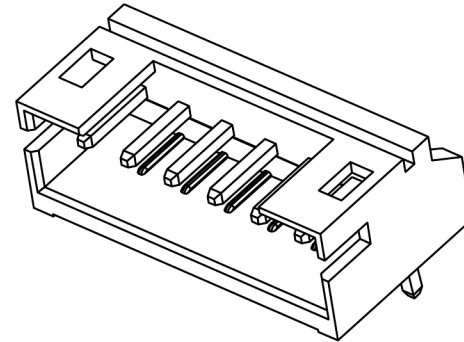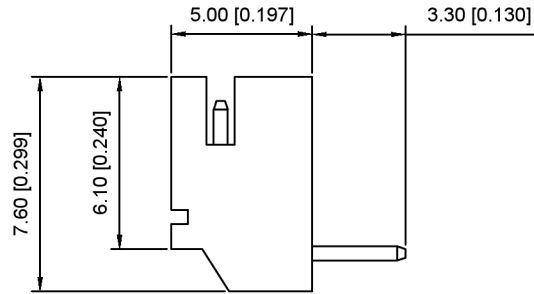

### Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ

X2016 W R-XX B - XX SN  
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:R-Straight 90°
- 4.Row No.-Pin No:XX-02Pin ~20Pin
- 5.Special No:B-With Groove; Without Link Stopper
- 6.Material:N0-PA66; 46-PA46 94V-0
- 7.Plating:SN-Bright Tin Plated V01-Gold Flash

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	5.00	12	22.00	26.00	25.00
03	4.00	8.00	7.00	13	24.00	28.00	27.00
04	6.00	10.00	9.00	14	26.00	30.00	29.00
05	8.00	12.00	11.00	15	28.00	32.00	31.00
06	10.00	14.00	13.00	16	30.00	34.00	33.00
07	12.00	16.00	15.00	17	32.00	36.00	35.00
08	14.00	18.00	17.00	18	34.00	38.00	37.00
09	16.00	20.00	19.00	19	36.00	40.00	39.00
10	18.00	22.00	21.00	20	38.00	42.00	41.00
11	20.00	24.00	23.00				

X2016WR-XXB-46SN	PA46 UL 94V-0	Brass	Tin-Plated	X2016H
X2016WR-XXB-N0SN	Nylon 66 UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Housing

DSND		DATE		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connectors	
DWN		DATE		VIEW:	PART NO.: X2016WR-XXB-46SN	
CHKD		DATE		UNIT: mm/in	DWG NO.: X-X2016WR-XXB-46SN	
APPD		DATE		SIZE: A4		
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0






ANGULAR	±5°
≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5
UNSPECIFIED TOLERANCES	

广东星坤科技股份有限公司

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
Δx	日期			
Δx				
Δx				



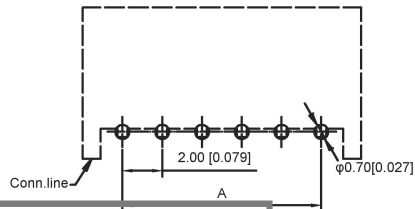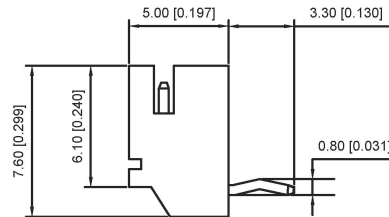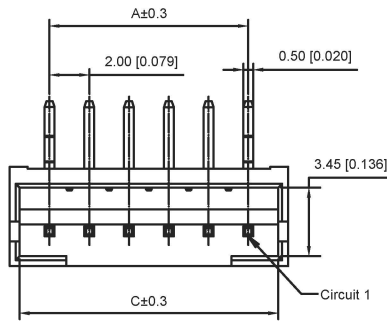

Recommended PCB Layout  
General Tolerance: 0.05

### Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

X2016 W-R-XX-K-N0 SN  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : R-S tright 90°
- ④ Row No.-Pin No.: XX-02P~20P
- ⑤ Plug the Pin & Special No.:K-Kink;K1-Reverse Kink;
- ⑥ Material : N0-PA66 94V-0
- ⑦ Plating Category: Sn-Bright Tin Plating;V01-Gold Flash

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	5.00	12	22.00	26.00	25.00
03	4.00	8.00	7.00	13	24.00	28.00	27.00
04	6.00	10.00	9.00	14	26.00	30.00	29.00
05	8.00	12.00	11.00	15	28.00	32.00	31.00
06	10.00	14.00	13.00	16	30.00	34.00	33.00
07	12.00	16.00	15.00	17	32.00	36.00	35.00
08	14.00	18.00	17.00	18	34.00	38.00	37.00
09	16.00	20.00	19.00	19	36.00	40.00	39.00
10	18.00	22.00	21.00	20	38.00	42.00	41.00
11	20.00	24.00	23.00				

X2016WR-XXK-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X2016H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

生效

ΔX  
ΔX  
ΔX  
MARK

日期

DESCRIPTION

REVISIONS







www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR ±5°  
L ≤ 4 ±0.2  
4 < L ≤ 16 ±0.3  
16 < L ≤ 63 ±0.4  
L > 63 ±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X2016WR-XXK-N0SN
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

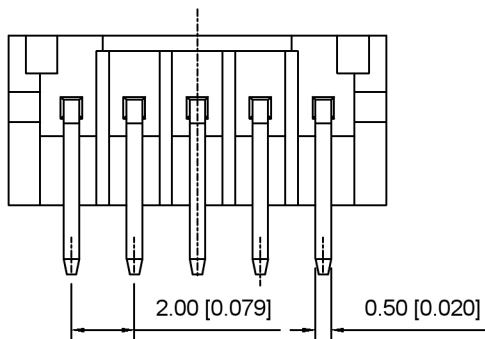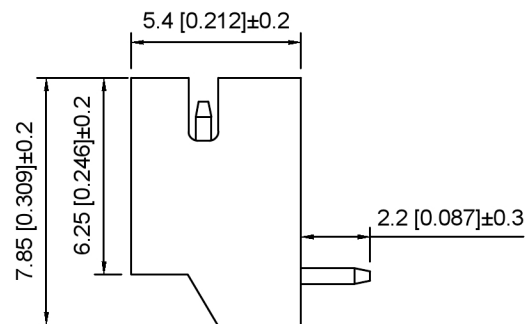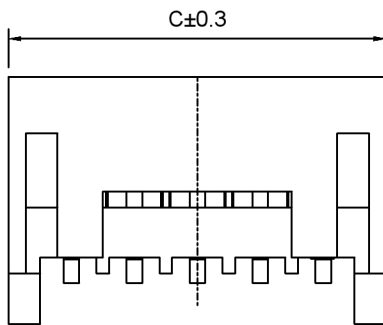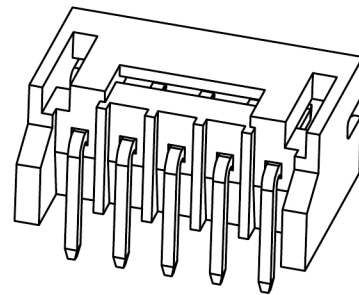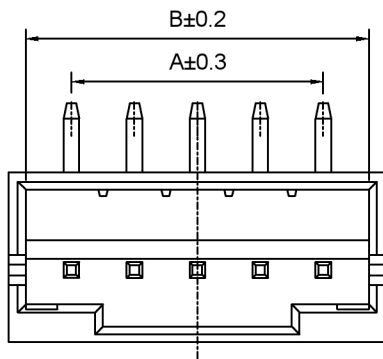

Recommended PCB Layout(Top view)  
Tolerance:±0.05mm

Specifications:

规格:  
Voltage rating:250V AC/DC  
额定电压: 250V AC/DC  
Current rating:2A AC/DC  
额定电流: 2A AC/DC  
Withstanding voltage:1000V AC/minute  
耐受电压: 1000V AC/分钟  
Temperature range:-25°C~+105°C  
温度范围: -25°C~+105°C  
Insulation resistance:≥1000MΩ  
绝缘电阻: ≥1000MΩ  
Contact resistance:≤20mΩ  
接触电阻: ≤20mΩ

X2016 W R - XX B R - LP SN  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

1. Series No
2. Category:W-Wafer
3. Welding Board Angle:R-Stright 90°
4. Row No.Pin No:XX-02~16Pin
5. Special No:B-With Baffle
6. Special No:R-DIP 2.2mm
7. Material:LP-LCP UL94V-0 ,Natural
8. Plating:SN- Tin Plated

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	4.90	6.00	10	18.00	20.90	22.00
03	4.00	6.90	8.00	11	20.00	22.90	24.00
04	6.00	8.90	10.00	12	22.00	24.90	26.00
05	8.00	10.90	12.00	13	24.00	26.90	28.00
06	10.00	12.90	14.00	14	26.00	28.90	30.00
07	12.00	14.90	16.00	15	28.00	30.90	32.00
08	14.00	16.90	18.00	16	30.00	32.90	34.00
09	16.00	18.90	20.00				

X2016WR-XXBR-LPSN	LCP	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2016WR-XXBR-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X2016WR-XXBR-LPSN
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0








XKB INDUSTRIAL PRECISION CO.,LIMITED

广东星坤科技股份有限公司

日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	

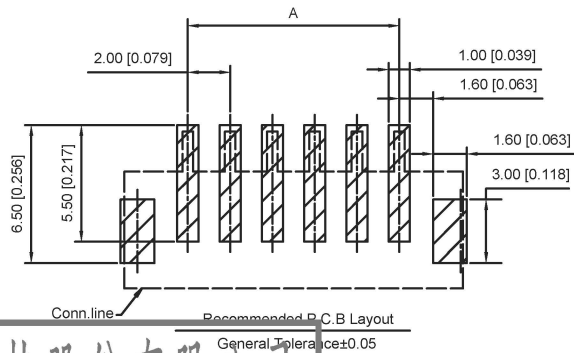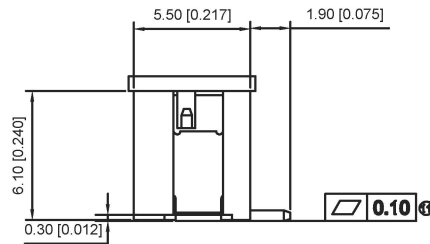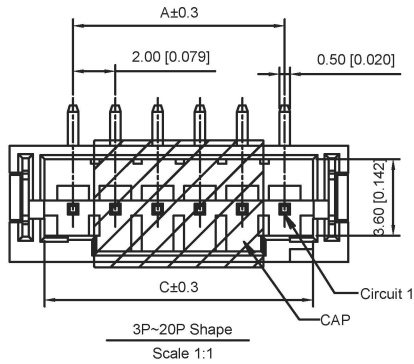

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ

X2016 W V S-XX- 9T SW

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180°
- ④ Welding Way:S-SMT
- ⑤ Row No.-Pin No.: XX-02P~20P
- ⑥ Material : LP-LCP;9T-PA9T 94V-0
- ⑦ Plating Category: SW-MatteTin Plating;

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.70	12	22.00	28.00	24.70
03	4.00	10.00	6.70	13	24.00	30.00	26.70
04	6.00	12.00	8.70	14	26.00	32.00	28.70
05	8.00	14.00	10.70	15	28.00	34.00	30.70
06	10.00	16.00	12.70	16	30.00	36.00	32.70
07	12.00	18.00	14.70	17	32.00	38.00	34.70
08	14.00	20.00	16.70	18	34.00	40.00	36.70
09	16.00	22.00	18.70	19	36.00	42.00	38.70
10	18.00	24.00	20.70	20	38.00	44.00	40.70
11	20.00	26.00	22.70				

X2016WVS-XX-LPSWHF	LCP UL 94V-0	Brass	Tin-Plated	X2016H
X2016WVS-XX-LPSW			Gold-Flash	
X2016WVS-XX-9TV01	PA9T UL 94V-0	Tin-Plated		
X2016WVS-XX-9TSW				
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

生效

ΔX	日期
MARK	DESCRIPTION







REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

文件工程章

DSND	DATE	SCALE: N/A	MODEL TYPE: X2016WVS-XX-9TSW
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0



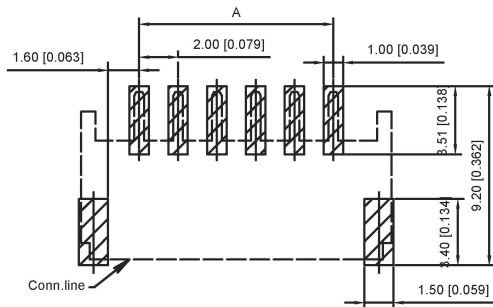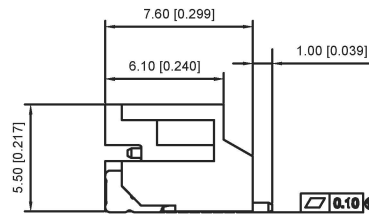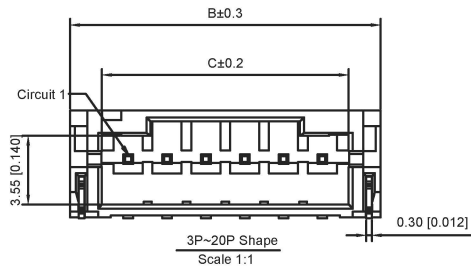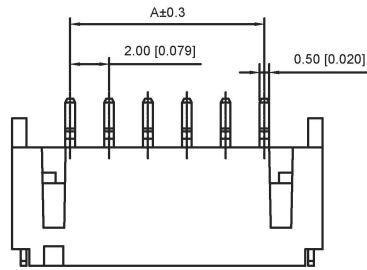

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ

X2016 W R S-XX- 9T SW

- Series No.
- Category : W-WAFER
- Wedding Board Angle : V-Stright 180°
- Welding Way:S-SMT
- Row No.-Pin No.: XX-02P~20P
- Material : LP-LCP;9T-PA9T 94V-0
- Plating Category: SW-MatteTin Plating;

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.70	12	22.00	28.00	24.70
03	4.00	10.00	6.70	13	24.00	30.00	26.70
04	6.00	12.00	8.70	14	26.00	32.00	28.70
05	8.00	14.00	10.70	15	28.00	34.00	30.70
06	10.00	16.00	12.70	16	30.00	36.00	32.70
07	12.00	18.00	14.70	17	32.00	38.00	34.70
08	14.00	20.00	16.70	18	34.00	40.00	36.70
09	16.00	22.00	18.70	19	36.00	42.00	38.70
10	18.00	24.00	20.70	20	38.00	44.00	40.70
11	20.00	26.00	22.70				

X2016WRS-XX-LPSWHF	LCP UL 94V-0	Brass	Tin-Plated	X2016H
X2016WRS-XX-LPSW			Gold-Flash	
X2016WRS-XX-9TV01	PA9T UL 94V-0		Tin-Plated	
X2016WRS-XX-9TSW				
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

Recommended PCB Layout  
General Tolerance±0.05

生效

ΔX	日期
ΔX	日期
MARK	DESCRIPTION

REVISIONS

DATE REVISED APPROVED

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5





UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X2016WRS-XX-9TSW
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

www.xk-dg.cn

www.helloxkb.com www.helloxkb.cn

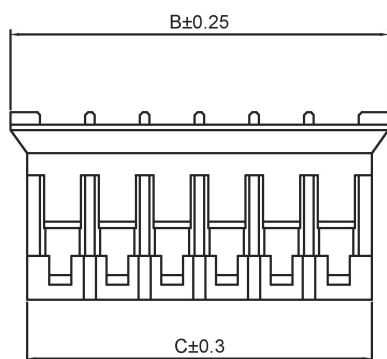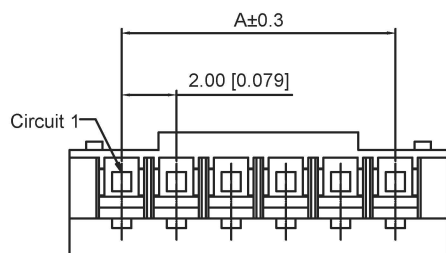

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

X2016 H- XX-N0

① ② ③ ④

- ① Series Number
- ② Category : H-HSG
- ③ Row No. Pin No: xx-02-15P
- ④ Material: N0-PA66 UL 94V-0

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	5.80	4.60	12	22.00	25.80	24.60
03	4.00	7.80	6.60	13	24.00	27.80	26.60
04	6.00	9.80	8.60	14	26.00	29.80	28.60
05	8.00	11.80	10.60	15	28.00	31.80	30.60
06	10.00	13.80	12.60	16	30.00	33.80	32.60
07	12.00	15.80	14.60	17	32.00	35.80	34.60
08	14.00	17.80	16.60	18	34.00	37.80	36.60
09	16.00	19.80	18.60	19	36.00	39.80	38.60
10	18.00	21.80	20.60	20	38.00	41.80	40.60
11	20.00	23.80	22.60				

X2016H-XX-N0	PA66 UL 94V-0	X2016T	X2016W
PARY NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司

生效


ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X2016H-XX-N0
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

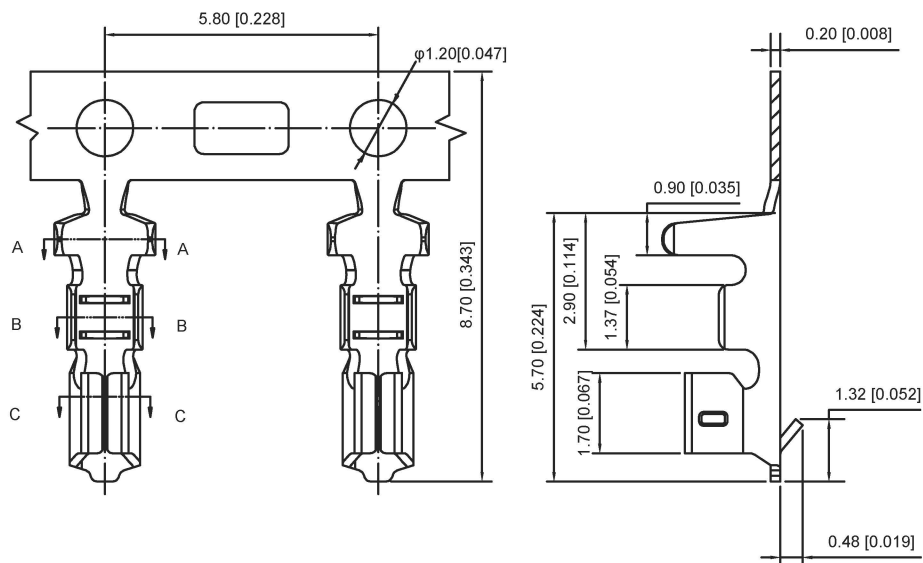


■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ


X2016 T-P SN

① ② ③ ④


- ① Series Number
- ② Category : T-terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style: SN-Bright tin plating




SECTION: A-A  
SCALE: 1:1



SECTION: B-B  
SCALE: 1:1



SECTION: C-C  
SCALE: 1:1



X2016T-PSN	Phosphor Bronze	AWG#24-30	1.5mm(Max)	Stamping Before Plating :30u" Ni,70u" Sn	X2016H
PARY NO	Matrial	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司

生效

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

REVISIONS




www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5


UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X2016T-PSN
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

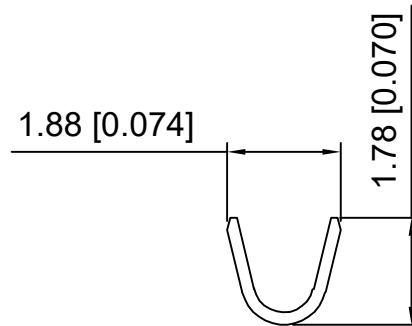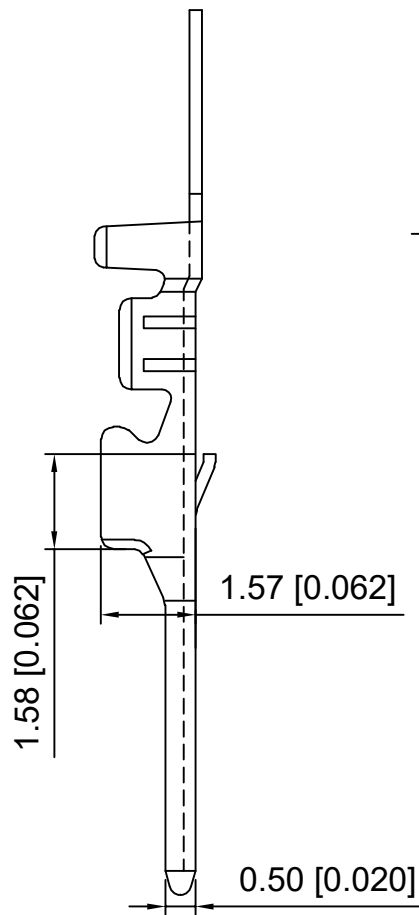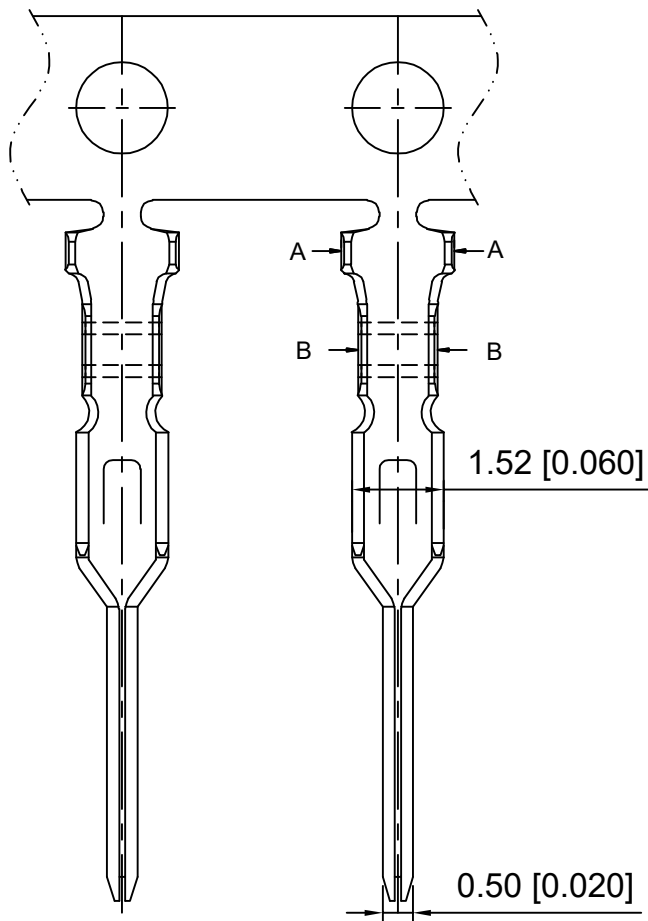

A-A

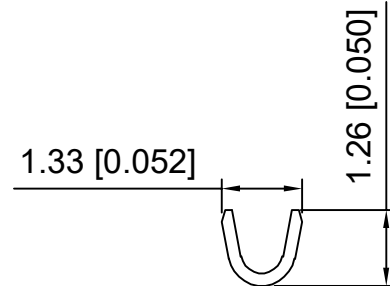

B-B

Specifications:  
 Voltage rating:250V AC/DC  
 Current rating:2A AC/DC  
 Withstanding voltage:800V AC/minute  
 Temperature range:-40℃-+85℃  
 Insulation resistance:≥1000MΩ  
 Contact resistance:≤20mΩ

X2016 T M - P SN

① ② ③ ④ ⑤

- 1.Series No
- 2.Category:T-Terminal
- 3.M-Male
- 4.Material:P-Phosphor bronze
- 5.Plating style :SN-Bright Tin plating

X2016TM-PSN	Phosphor bronze	AWG#22-28	Tin plating	X2016HF
PARY NO	Matrial	Wire range	Finish	Suitable XK Housing

DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connecto
DWN	VIEW:	PART NO.: X2016TM-PSN
CHKD	UNIT: mm/in	DWG NO.: X-X2016TM-PSN
APPD	SIZE: A4	



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISIC
	1/1	A0

					ANGLAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
Δx					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						