


Thermally conductive foil made of siliconelastomer

foil type	foil WS	foil WG	foil WK	foil WB
material	silicone foil, standard	silicone foil, GF reinforced	silicone foil, GF reinforced, one-sided self-adhesive	silicone foil, GF reinforced
Washer				
TO-3	WS 3	WG 3	WK 3	WB 3
TO-3 M	WS 3 M		WK 3 M	
TO-3/4	WS 3/4		WK 3/4	
TO-3 PF	WS 3 P	WG 3 P	WK 3 P	WB 3 P
3158	WS 3158		WK 3158	WB 3158
TOP 3	WS TOP 3		WK TOP 3	
TOP 3/1	WS TOP 3/1		WK TOP 3/1	
TO 218		WG 218		
TO 247	WS 247		WK 247	
TO 220	WS 220	WG 220	WK 220	WB 220
4 X TO 220	WS 4 220			
3159	WS 3159		WK 3159	WB 3159
TO 126			WK 126	
SOT 32			WK 32	
TO 247/1	WS 247/1			
Insulating tube				
TO-220 Ø 11 mm, length 25 mm	WSC-220			
TO-3 PF Ø 13.5 mm, length 25 mm	WSC-3 P			
TO-247 Ø 14.5 mm, length 30 mm	WSC-247			
Insulating tube as meterpiece				
TO-220 Ø 11 mm	WSM-220			
TO-3 PF Ø 13.5 mm	WSM-3 P			
TO-247 Ø 14.5 mm	WSM-247			
Tape material (width)				
24 mm			WKT 24	
30 mm	WST 30			WBT 30
36 mm	WST 36			
85 mm	WST 85			
300 mm		WGT 300	WKT 300	WBT 300

Insulating cap

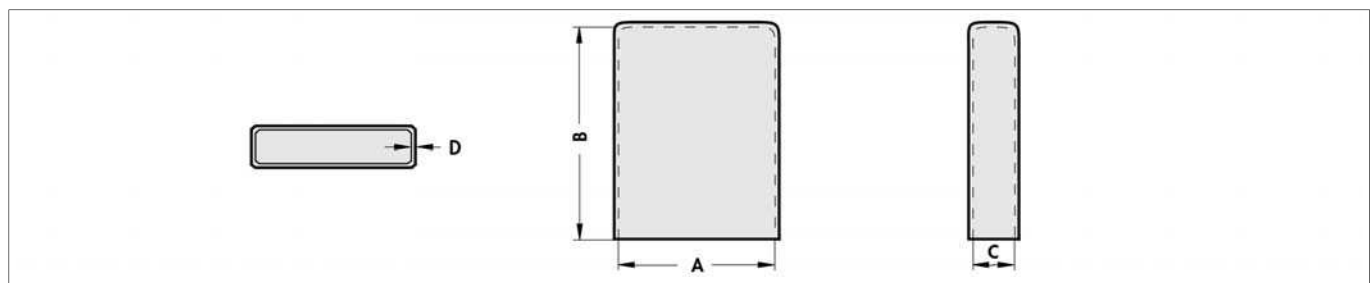

art. no.	type	dim. [mm]			
		A	B	C	D
WSI 220 210	TO 220	11	21.0	5.0	0.9
WSI 220 225	TO 220	11	22.5	5.0	0.3
WSI TOP 3 235	TOP 3	18	23.5	5.0	0.9
WSI TOP 3 280	TOP 3	16	28.0	5.0	0.3
WSI TO 3 PL	TO 3 PL / TO 247	22	34.0	5.5	0.9

Heatsinks for TO 5 and TO 18
 Profiles for PCB components
 Heatsinks for PCB
 Profiles for lock-in fixing spring

→ C 15 - 16
 → A 91
 → A 89
 → A 85 - 88

Profiles for PCB mounting
 processor overview
 Pin heatsinks for IC
 Heatsinks for BGA

→ A 89 - 110
 → B 2 - 7
 → B 20 - 27
 → B 16 - 19