

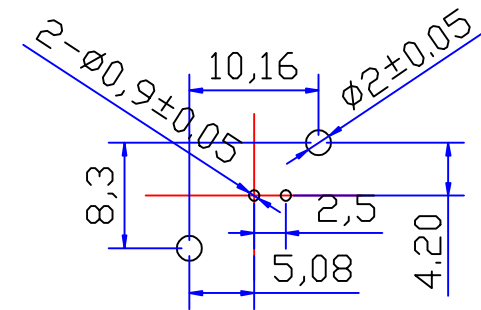
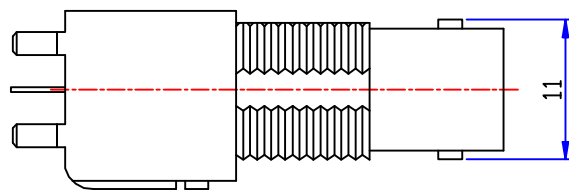




Product NO.		DOSIN-801-0033		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2015/05/19	John kine
B				

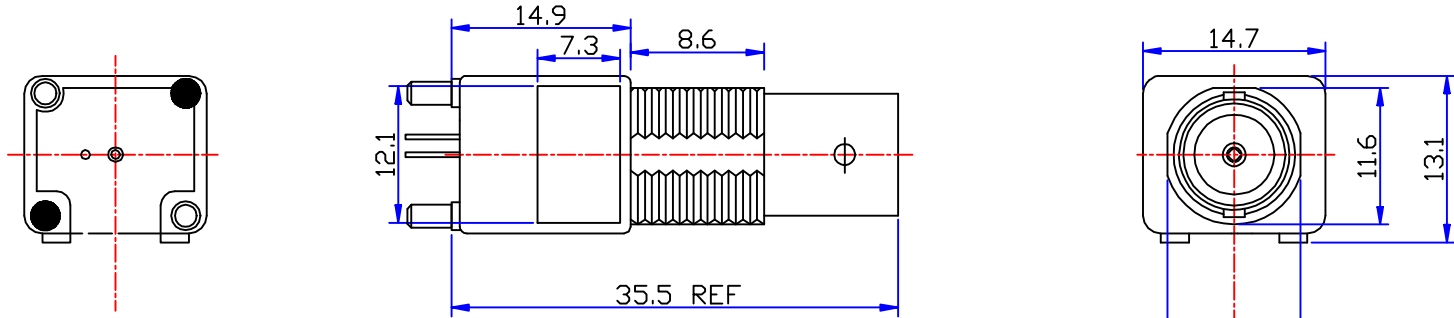

SPECIFICATIONS:

Impedance: 75 Ohms

Frequency Range: DC~3G

VSWR: 1.3max

Working Voltage: 500v RMS @ SEA level

Insulation Resistance: 5000 Ohms min

Temperature Range: -55°C TO +155°C

Drawings products are in line with ROHS standards


PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

NOTE:

Tolerance

I. ±0.15
 I. I ±0.10
 I. XX ±0.05
 Angular ±5°

View



UNIT

MM

SCALE

1:1



Dosin Industrial (HK) Co., Ltd

东莞市德索五金电子有限公司

Dosin Hardware Electronics Co., Ltd

E-mail: dosin2005@163.com
 dosin2005@dosin-china.com
 Web: http://www.dosinconn.com
 TEL: (0086) 769-81153906
 FAX: (0086) 769-81875836

Name: BNC JACK FOR PCB CONNECTOR

SIZE A Product NO. DOSIN-801-0033 REV A

Date Time 2015/05/19 CAD FILE H/company drawings/BD SHEET: 1 OF 1

NO	DESCRIPTION	MATERIAL	FINISHED	QTY
5	LOCK WASHER	HEX NUT	BRASS	NICKEL
4	HEX NUT	BRASS	NICKEL	1
3	INSULATOR	PDM	NONE	1
2	CONTACT PLATING	BRASS	GOLD	1
1	BODY	ZINC	NICKEL	1

LOCK WASHER	BRASS	NICKEL
HEX NUT	BRASS	NICKEL
INSULATOR	PDM	NONE
CONTACT PLATING	BRASS	GOLD
BODY	ZINC	NICKEL

DRAWN Zelin.Zhang
 CHECKED
 APPROVALS