

REVISONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Compact spacing on PCB of 7.0mm
Short stroke 1.9mm to latch

SPEAFICATIONS

1.ELECTRICAL	
Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

●Temperature ratong	Operating -15 to +55 storage.-25 to +65
● Operation	160±80gf
● Stroke	Lock Stroke .1.9±0.2mm Full stroke,2.4±0.2mm
● Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
● Con tact form	DPDT

PAPT NO	XKB7070-X-92
OPERATION	W:NO LOCK Z:LOCK




7	Contact	2	Phosphor Bronze	Plating silvering
6	Terminal	6	Brass	Plating silvering
5	Spring	1	Sus	Natural
4	Base	1	PBT	
3	Crochet Needle	1	Sus	Natural
2	Cover	1	POM	
1	Keystake	1	POM	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	







DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	XKB7070-X-92
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1



PCB Layout

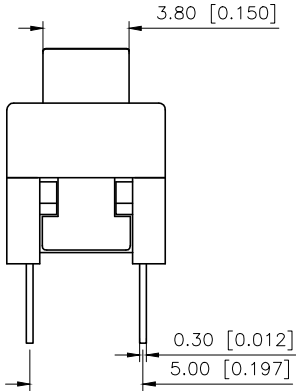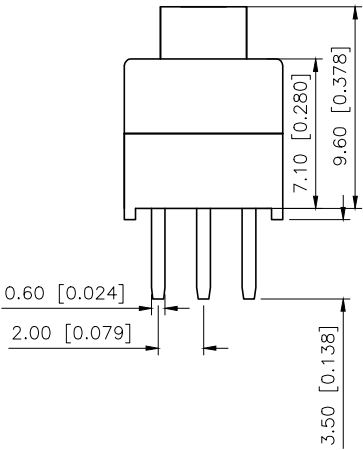

常态: 2-3导通 5-6导通
按下: 1-2导通 4-5导通