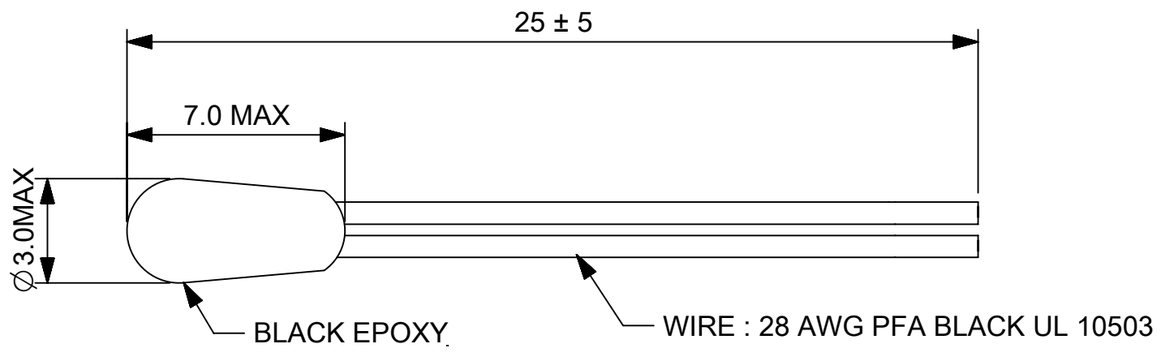

RESISTANCE VS TEMPERATURE CHARACTERISTICS:

Temp(°C)	R min (KΩ)	R nom (KΩ)	R max (KΩ)	Temp(°C)	R min (KΩ)	R nom (KΩ)	R max (KΩ)
-40	324.756	333.563	342.369	50	3.587	3.601	3.614
-35	235.68	241.072	246.464	55	2.974	2.985	2.996
-30	172.491	176.082	179.673	60	2.478	2.487	2.496
-25	127.672	129.925	132.179	65	2.075	2.082	2.089
-20	954.061	96.807	98.209	70	1.745	1.751	1.757
-15	71.910	72.809	737.074	75	1.472	1.480	1.487
-10	54.713	55.253	55.793	80	1.248	1.256	1.264
-5	41.981	42.292	42.604	85	1.062	1.070	1.079
0	32.473	32.640	32.806	90	0.907	0.916	0.924
5	25.265	25.391	25.516	95	0.778	0.786	0.795
10	19.806	19.902	19.997	100	0.670	0.678	0.686
15	15.640	15.713	15.787	105	0.579	0.587	0.594
20	12.437	12.493	12.550	110	0.502	0.510	0.517
25	9.956	10.000	10.044	115	0.437	0.444	0.451
30	8.022	8.056	8.090	120	0.382	0.388	0.394
35	6.503	6.530	6.557	125	0.335	0.340	0.346
40	5.303	5.325	5.346	130	0.294	0.299	0.305
45	43.495	4.367	4.384	135	0.259	0.264	0.269

NOTES:

1. RESISTANCE @ 25°C : 10KΩ±0.1°C(±0.44%).
2. BETA VALUE (0/50°C) : 3892K±1%.
3. OPERATING TEMPERATURE RANGE : -40°C TO +135°C.
4. DISSIPATION FACTOR : 1.5mW/°C
5. THERMAL TIME CONSTANT : LESS THAN 3SECONDS IN WATER
6. INSULATION RESISTANCE : 10MΩ AT 100 VDC

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FD = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 691238
DRWN: RAVIKM 2022/01/05
CHK'D: RBBHASKAR 2022/01/25
APPR: RBBHASKAR 2022/01/25

INITIAL REVISION:
DRWN: RAVIKM 2021/03/04
APPR: RBBHASKAR 2021/03/05

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 215272

molex

NTC EPOXY - 3892 25MM 10K0.44%

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2152721603	PSD	000	A1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
2152721603	OTS	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/25 11:24:40

FORMAT: master-tb-prod-A3
REVISION: J
DATE: 2020/01/14