

DATE

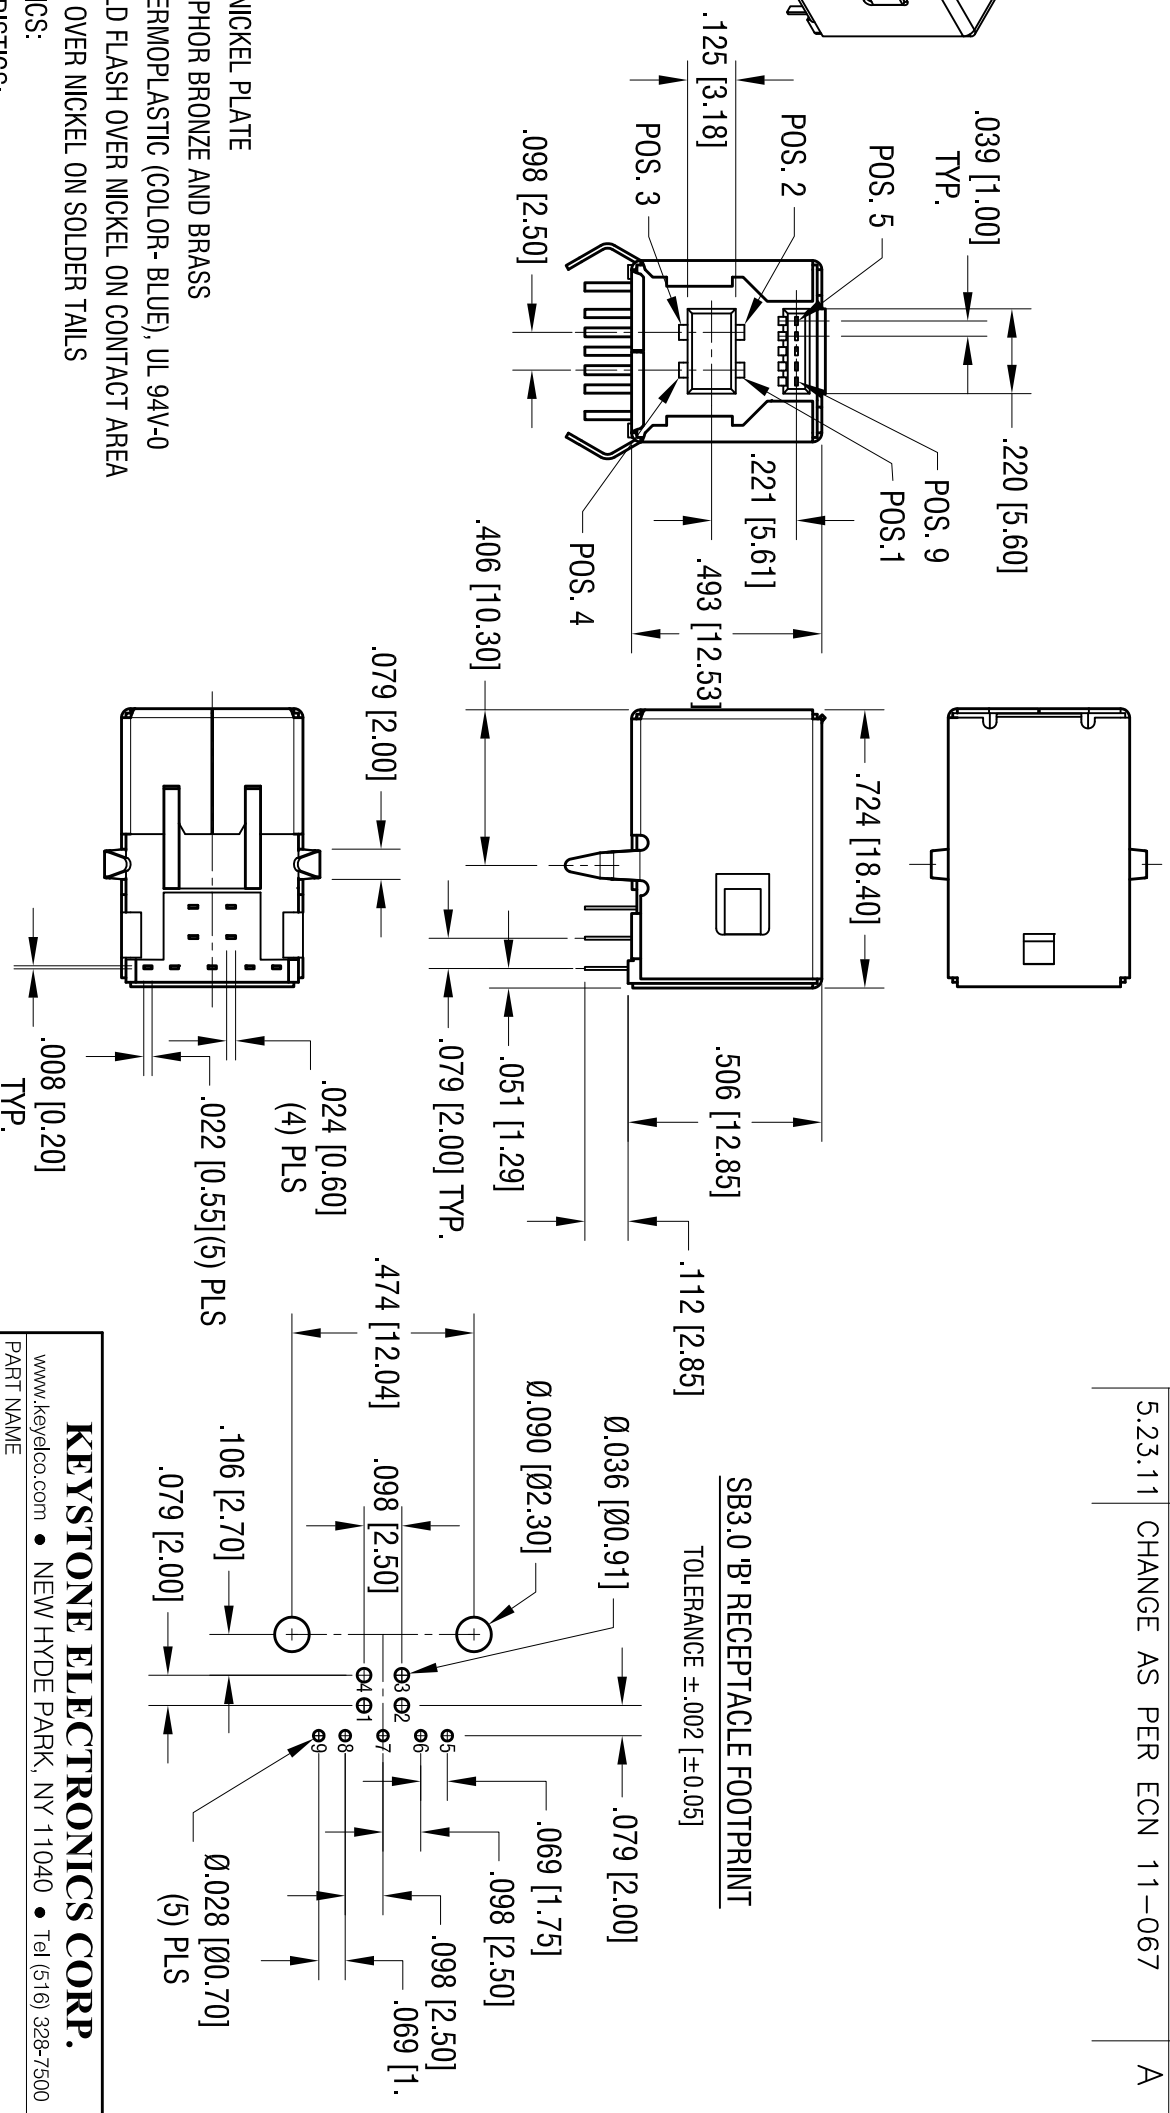

5.23.11

DESCRIPTION

CHANGE AS PER ECN 11-067

REV.

A

**SOCKET SPECIFICATIONS:**

SHELL: MAT'L- BRASS, NICKEL PLATE

CONTACT: MAT'L- PHOSPHOR BRONZE AND BRASS

INSULATION: MAT'L- THERMOPLASTIC (COLOR- BLUE), UL 94V-0

FINISH- GOLD FLASH OVER NICKEL ON CONTACT AREA

TIN OVER NICKEL ON SOLDER TAILS

**ELECTRICAL CHARACTERISTICS:****ELECTRICAL CHARACTERISTICS:**CONTACT RESISTANCE: 30m  $\Omega$  max.INSULATION RESISTANCE: 1000 mega  $\Omega$  min.

DIELECTRIC VOLTAGE : 1.8 Amp AT 250 V AC MIN.

**MECHANICAL CHARACTERISTICS:**

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

INSERTION FORCE: 35N MAX.

**KEYSTONE ELECTRONICS CORP.**

www.keystoneelectronics.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

USB 3.0 TYPE B

MATERIAL

AS NOTED

FINISH

AS NOTED

TOLERANCES INCH [MM]  
DECIMAL  $\pm .010$  [ $\pm 0.25$ ]  
ANGULAR  $\pm 1^\circ$

CODE

C

DWG NO.

950

DRN BY

NT

DATE

4.09.10

APP'D

LN

SCALE

2X

THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP. AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.