
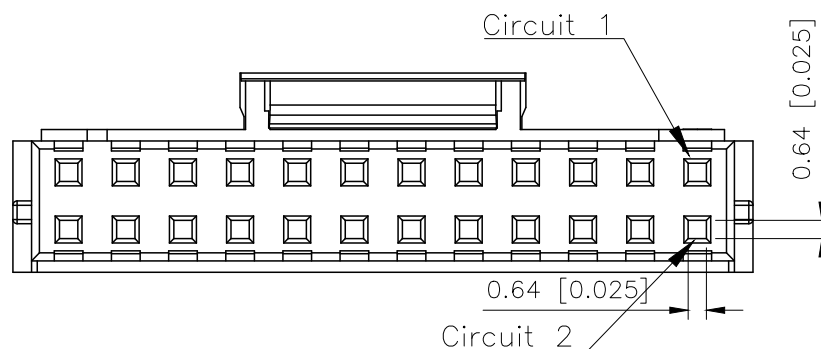
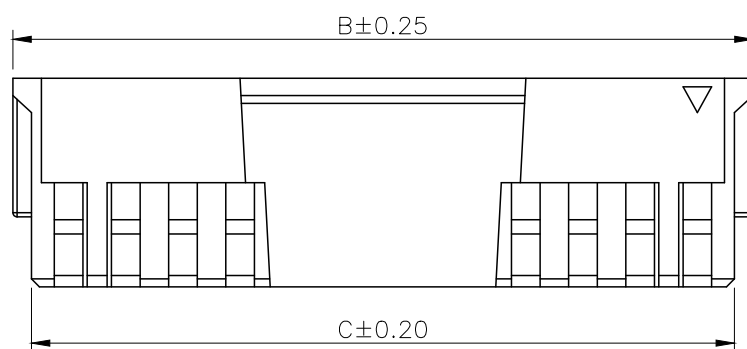
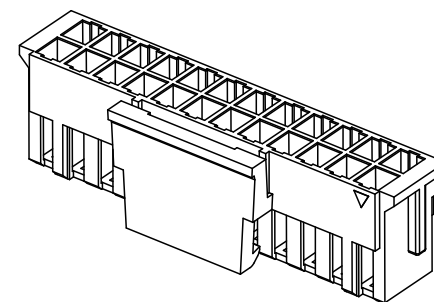


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.27	阿树

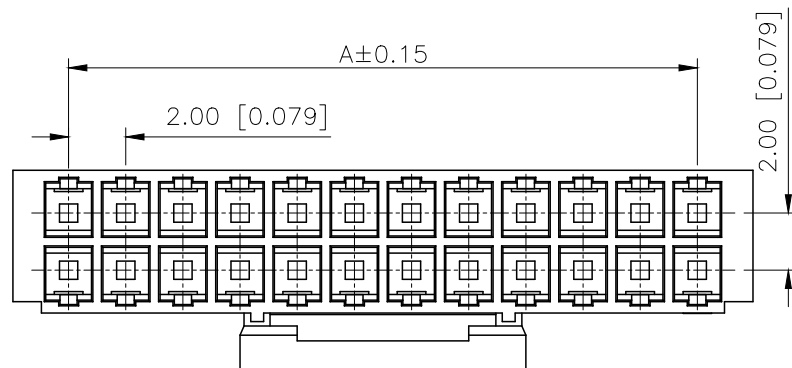

■ SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ

PART NO.:

X2026 H-2xXX B-N0 XX
 ① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:H-HSG
③Row No.Pin No:2xXX-2x02~2x22Pin
④Plug the Pin&Special NO:
B-With Lock In the middle
⑤Material:NO-PA66 UL94V-0
⑥Color:Blank-Natural Color;BK-Black

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
2x02	2.00	5.90	4.60	2x13	24.00	27.90	26.60
2x03	4.00	7.90	6.60	2x14	26.00	29.90	28.60
2x04	6.00	9.90	8.60	2x15	28.00	31.90	30.60
2x05	8.00	11.90	10.60	2x16	30.00	33.90	32.60
2x06	10.00	13.90	12.60	2x17	32.00	35.90	34.60
2x07	12.00	15.90	14.60	2x18	34.00	37.90	36.60
2x08	14.00	17.90	16.60	2x19	36.00	39.90	38.60
2x09	16.00	19.90	18.60	2x20	38.00	41.90	40.60
2x10	18.00	21.90	20.60	2x21	40.00	43.90	42.60
2x11	20.00	23.90	22.60	2x22	42.00	45.90	44.60
2x12	22.00	25.90	24.60				

X2026H-2xXXB-N0BK	Nylon 66 UL 94V-0(Black)	X2026T-B	X2026W-B
X2026H-2xXXB-N0	Nylon 66 UL 94V-0		
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2026H-2xXXB-N0
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1