





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		端子模具调整, 更新产品图面	2024.07.23	阿 树

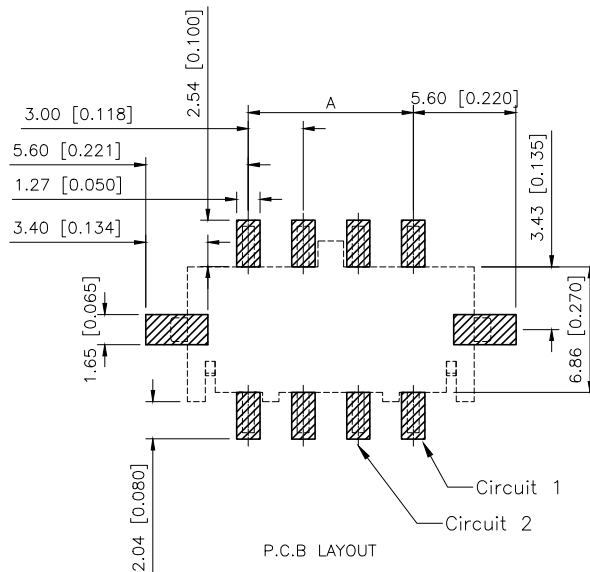

WITH COVER

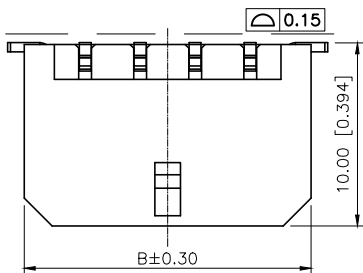

P.C.B LAYOUT



■SPECIFICATIONS



- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ

PART NO.:

X3025 W V S-2xXX D-LP SW XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Welding Way: S-SMT
⑤Row No.Pin No:2xXX-2x02~2x12Pin
⑥Plug the Pin&Special NO:
D-Solder Tabs
⑦Material:LP-LCP L94V-0
⑧Planting: SW-Matte Tin plating
⑨Color:Blank-Natural Color

Poles	Dimensions (mm)	
	A	B
2x02	3.00	9.65
2x03	6.00	12.65
2x04	9.00	15.65
2x05	12.00	18.65
2x06	15.00	21.65
2x07	18.00	24.65
2x08	21.00	27.65
2x09	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

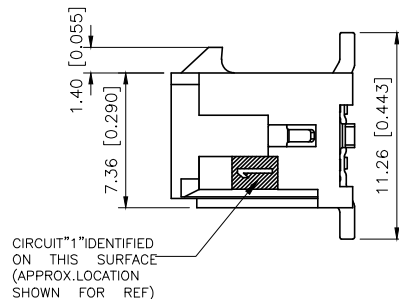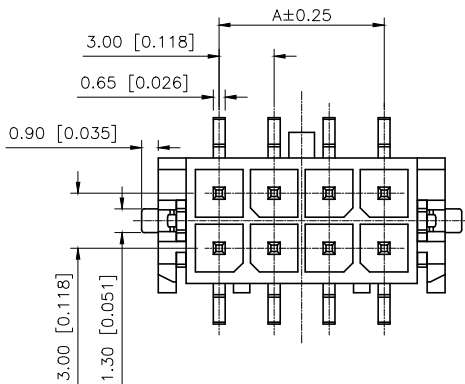


X3025WVS-2xXXD-LPSW	LCP UL 94V-0	Brass	Matte tin	Brass	Matte tin	X3025H
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB Housing


AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:	MODEL TYPE: 3.00 mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WVS-2xXXD-LPSW
APPROVED		SIZE: A4	DWG NO.:

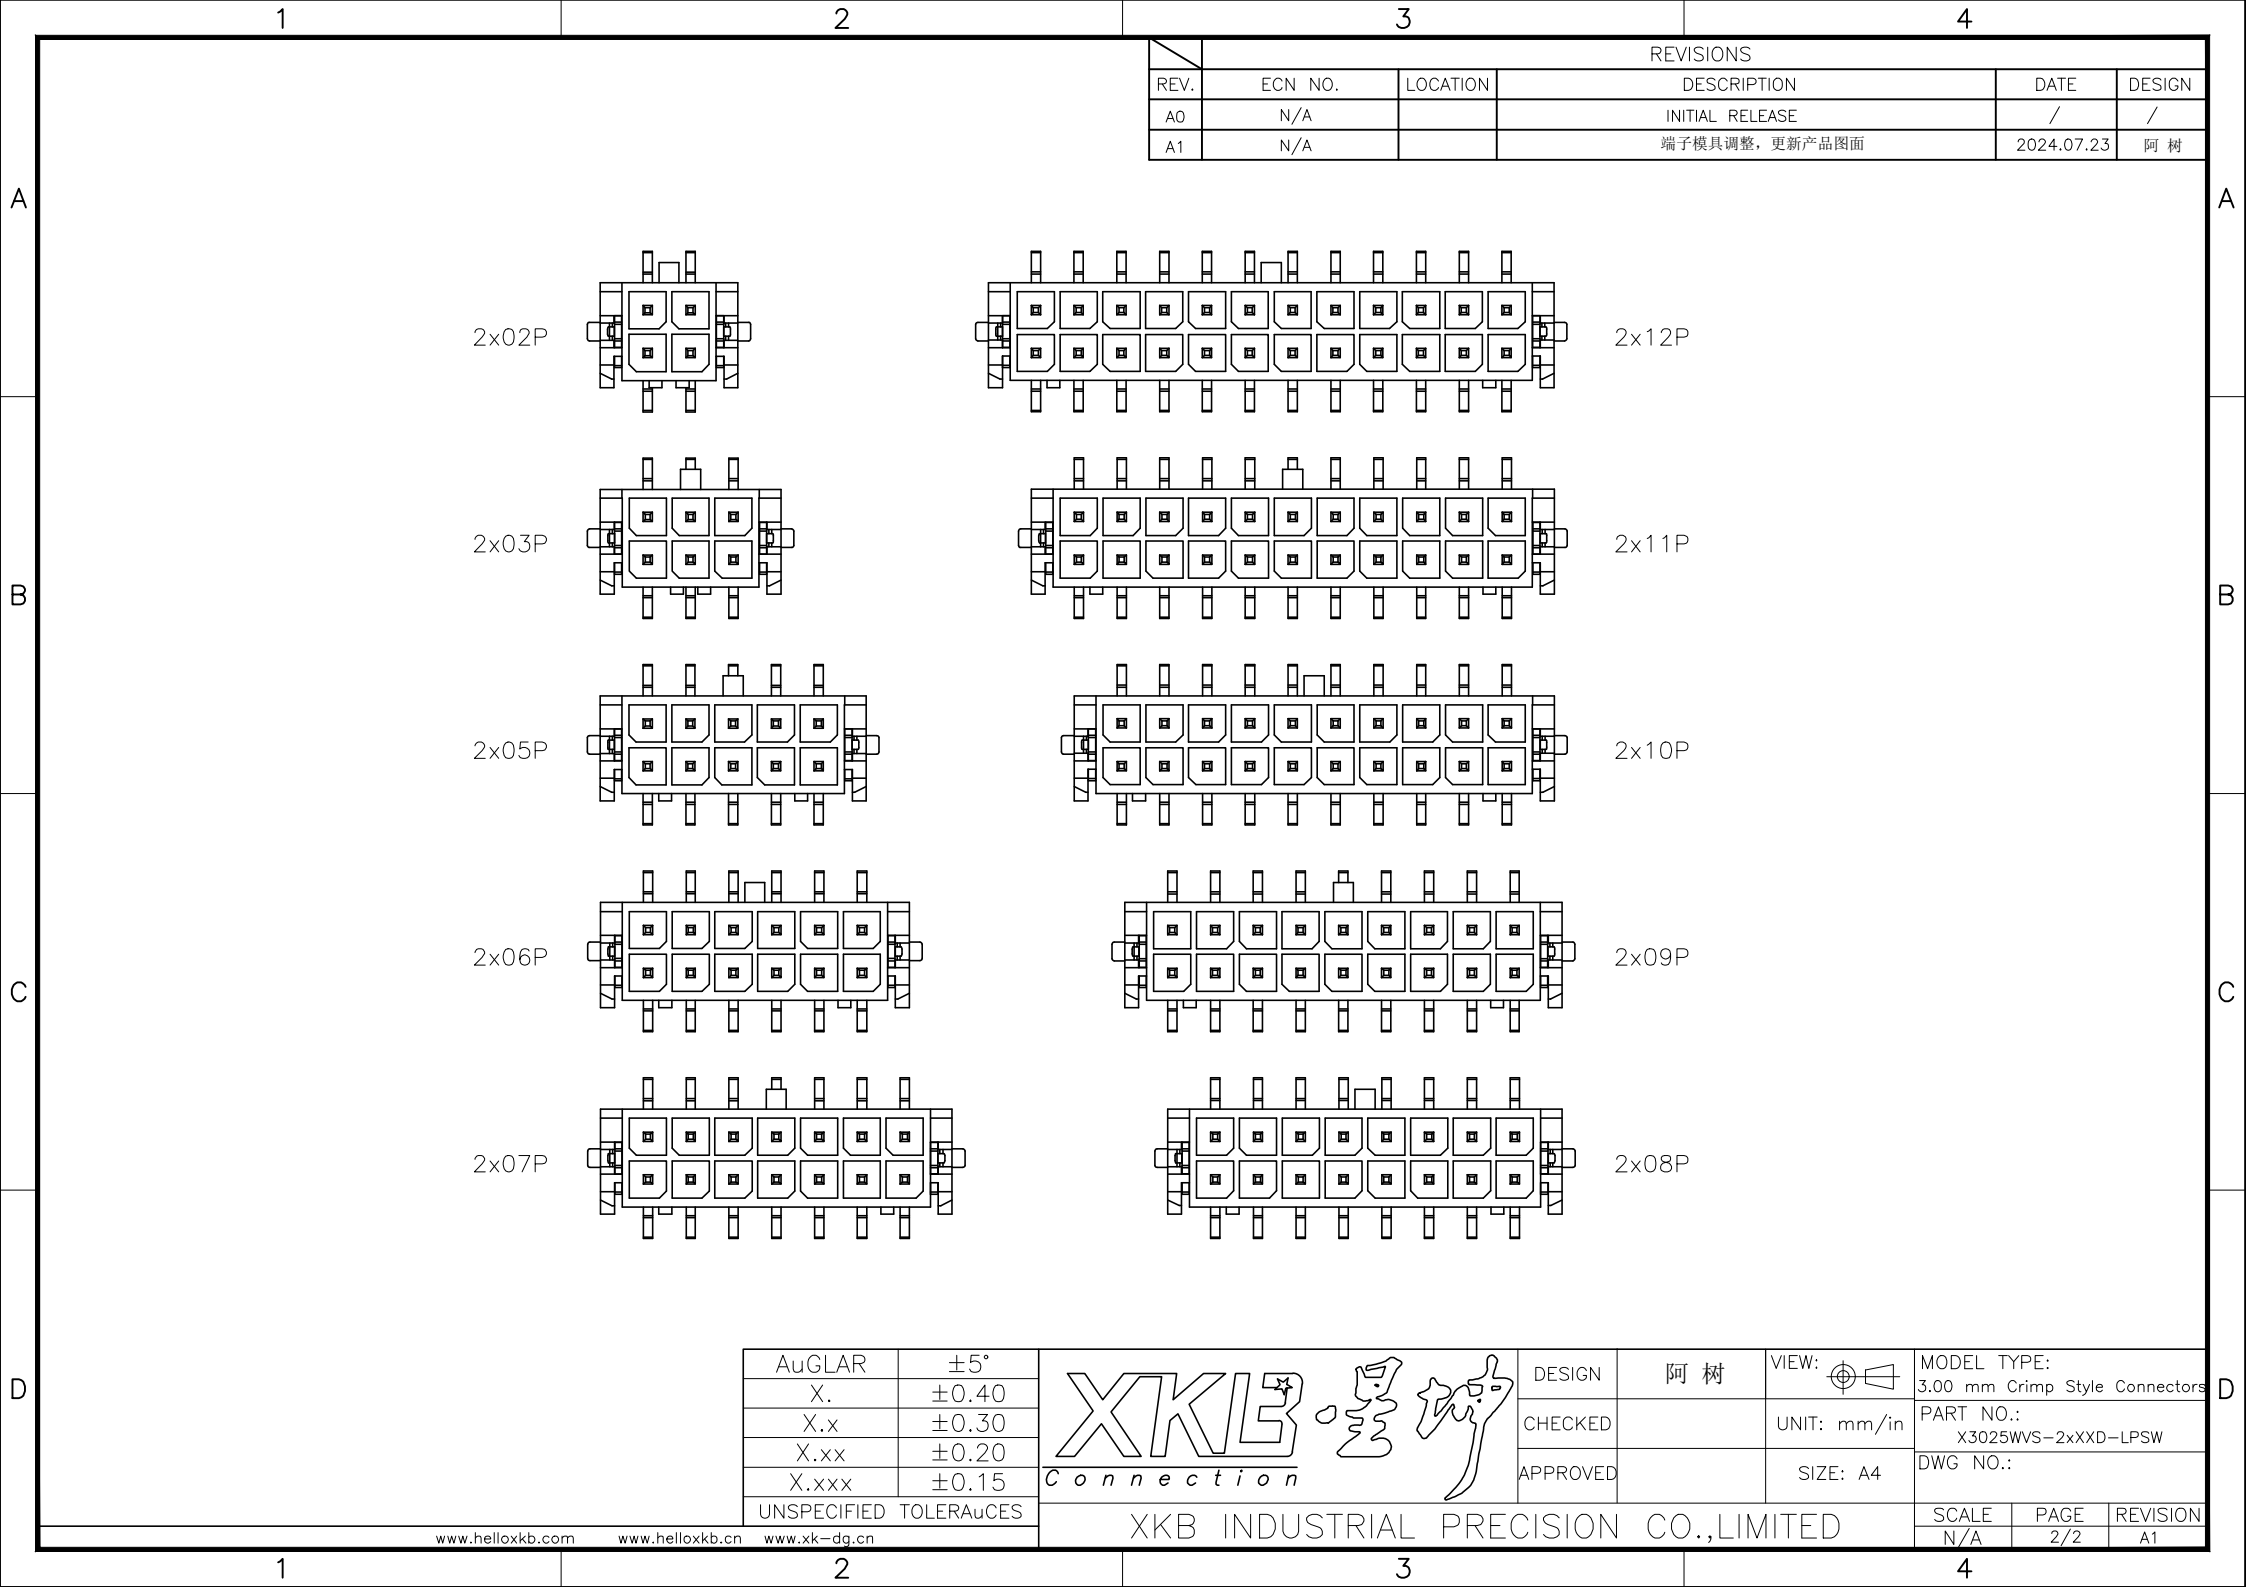

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		端子模具调整，更新产品图面	2024.07.23	阿 树

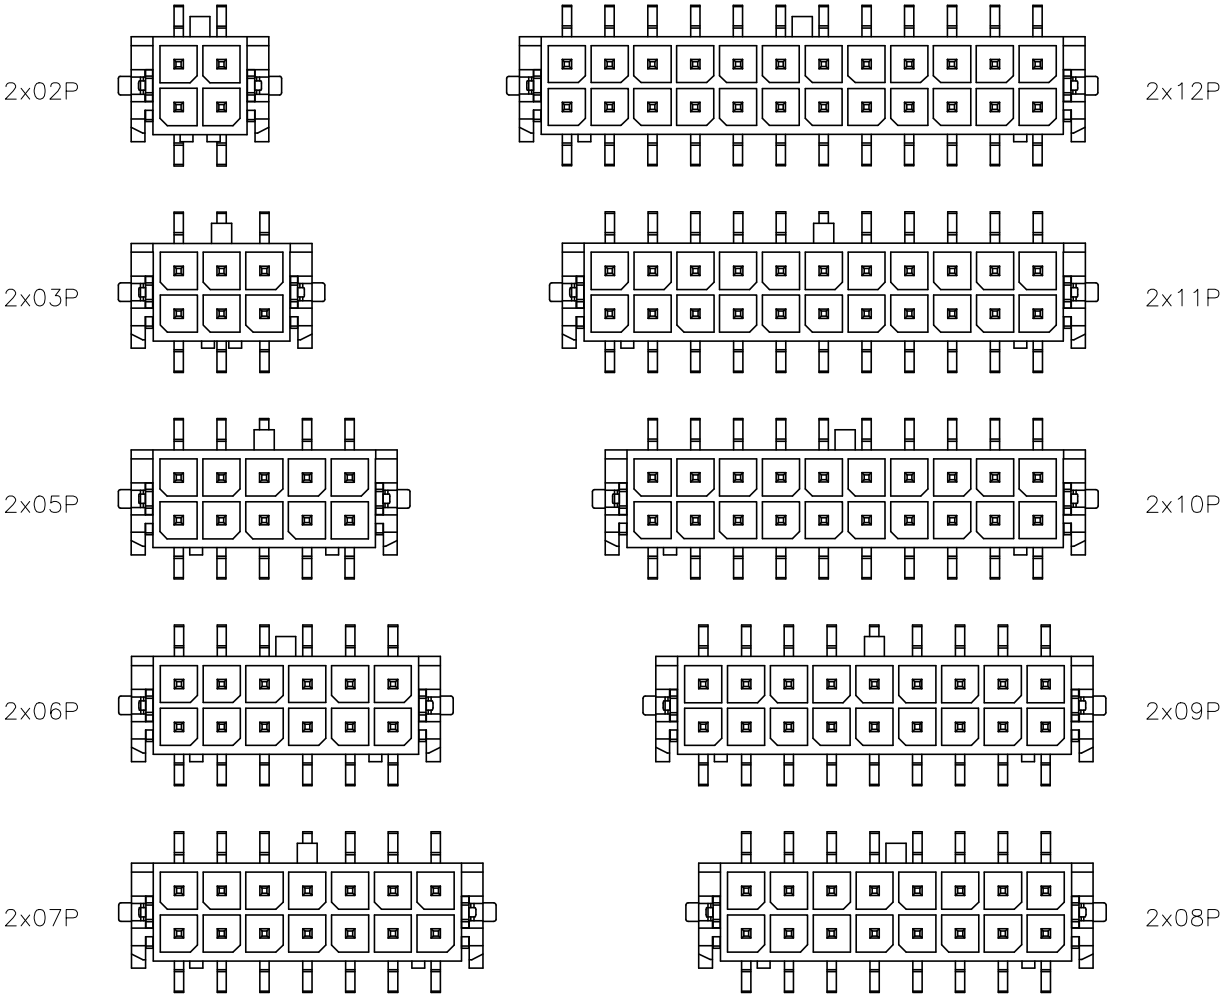

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:		MODEL TYPE:	3.00 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X3025WVS-2xXXD-LPSW
APPROVED		SIZE:	A4	DWG NO.:	