Data Sheet | Item Number: 207-1333

Gelbox; Branch; for cables; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; with gel; 221, 2x73 Series; max. 4 mm² connectors; max. 4 mm² connectors; max. 4 mm² connectors; max. 4

thout splicing connectors; Size 3; gray


https://www.wago.com/207-1333









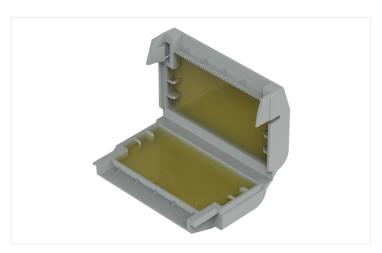



Data Sheet | Item Number: 207-1333

https://www.wago.com/207-1333



Note on Packaging Unit (PU) and Subpackaging Unit (SPU):

If you order a full PU, you will receive our eco-friendly, sustainable cardboard blisters packed in a shelf-ready box.

If you order a quantity smaller than a full PU, you will receive the eco-friendly, sustainable cardboard blisters without a shelf-ready box.

Please refer to the system description for the splicing connectors that can be used.

Your benefits:

- Easy, fast and safe to use
- · Can be used immediately and accessed again later
- · Silicon-free
- Label-free
- · Suitable for indefinite storage
- The complete system consisting of WAGO's gelboxes and splicing connectors has been VDE-tested and IPX8-certified.

Connection data

Connection 1

Actuation type Locking system

| Physica | l data |
|---------|--------|
|---------|--------|

| Width | 52.7 mm / 2.075 inches |
|--------|------------------------|
| Height | 17.8 mm / 0.701 inches |
| Depth | 33.6 mm / 1.323 inches |

Mechanical data

| Design | Size 3 |
|---------------|--------------|
| Mounting type | Flying leads |

Suitable for 4 mm² splicing connectors

Material data

Note (material data)

<u>Information on material specifications can be found here</u>

Color gray
Housing material Polypropylene
Fire load 0 MJ
Weight 21 g

Environmental requirements

| Ambient temperature (operation) | -55 +85 ℃ |
|---------------------------------|-----------|
| Ambient temperature (storage) | 0 +40 °C |

Commercial data

| ETIM 8.0 | EC001170 |
|-----------------------|---------------|
| ETIM 7.0 | EC001170 |
| PU (SPU) | 36 (3) pcs |
| Country of origin | DE |
| GTIN | 4055143997805 |
| Customs tariff number | 85389099990 |

https://www.wago.com/207-1333



Environmental Product Compliance

RoHS Compliance Status Compliant,No Exemption

Approvals / Certificates

General approvals



rungsinstitut

| Approval | Standard | Certificate Name |
|----------------------------------|----------|------------------|
| VDE VDE Prüf- und Zertifizie- | EN 60998 | 400051938 |

Declarations of conformity and manufacturer's declarations

| Approval | Standard | Certificate Name |
|---------------------------------------------------------|----------|------------------|
| EU-Declaration of Confor- mity WAGO GmbH & Co. KG | - | - |
| UK-Declaration of Conformity WAGO GmbH & Co. KG | - | - |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 207-1333



| Documentation | | |
|--------------------------------------------|-------------------|-------------------------|
| System Description | | |
| System Description 207 Series Gel boxes | pdf 1156.45 KB | \perp |
| System Description 207 Series Gel boxes | pdf 1191.37 KB | $\overline{\downarrow}$ |

| Bid Text | | |
|----------|------------------|--------------------------|
| 207-1333 | xml 3.57 KB | $\underline{\downarrow}$ |
| 207-1333 | docx 20.39 KB | $\underline{\downarrow}$ |

CAD/CAE-Data

CAD data

2D/3D Models 207-1333



CAE data

ZUKEN Portal 207-1333



Installation Notes

Installation



Open the Gelbox at the side latches.



Place the wired connector in the Gelbox.



Place the wired connector in the Gelbox.



Close the Gelbox.

Data Sheet | Item Number: 207-1333

https://www.wago.com/207-1333



Installation





Close latch securely.

Re-accessible:

- Open the Gelbox.
- Remove the gel.Rewire with new components.



Lift the flap and pull the cover perforation forward.



Press in the perforation on the sides.



Tear off the cover from the perforation.



As a counter display: Bend the rear flap at the fold, straighten it and fix it in the card-



If the flap is not required, tear off from the perforation.

Subject to changes. Please also observe the further product documentation!