


WSB5558N

Schottky Barrier Diode

[Https://www.omnivision-group.com](https://www.omnivision-group.com)

Features

- 100mA Average rectified forward current
- Low forward voltage
- Low leakage current
- Small package DFN1006-2L




DFN1006-2L



Applications

- Low Current rectification



Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage (repetitive peak)	V_{RM}	30	V
Reverse voltage (DC)	V_R	30	V
Average rectified forward current	I_o	100	mA
Peak forward surge current (8.3ms single sine pluse)	I_{FSM}	1	A
Junction temperature	T_J	150	$^{\circ}\text{C}$
Operating temperature	T_{opr}	-40 ~ 125	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-40 ~ 150	$^{\circ}\text{C}$

Electronics characteristics ($T_A=25^{\circ}\text{C}$)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse Voltage	V_R	$I_R=100\mu\text{A}$	30			
Forward Voltage	V_F	$I_F=10\text{mA}$			0.35	V
		$I_F=100\text{mA}$			0.45	V
Reverse current	I_R	$V_R=10\text{V}$			15	μA
		$V_R=30\text{V}$			30	μA
Junction capacitance	C_J	$V_R=5\text{V}, F=1\text{MHz}$		21		pF
Thermal Resistance	$R_{\theta(JA)}$	Junction to Ambient			500	K/W

Order Informations


Device	Package	Marking	Shipping
WSB5558N-2/TR	DFN1006-2L	$T^{(1)}$	10000/Reel&Tape

Note 1: * = Month code(A~Z); T = Device code;


Typical characteristics (Ta=25°C, unless otherwise noted)

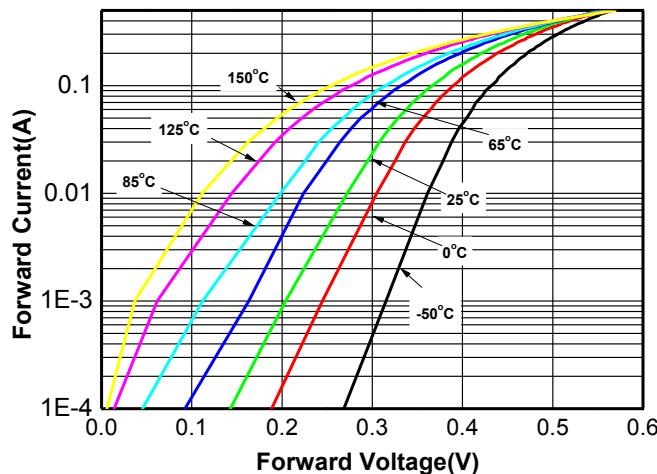


Forward voltage vs. Forward current

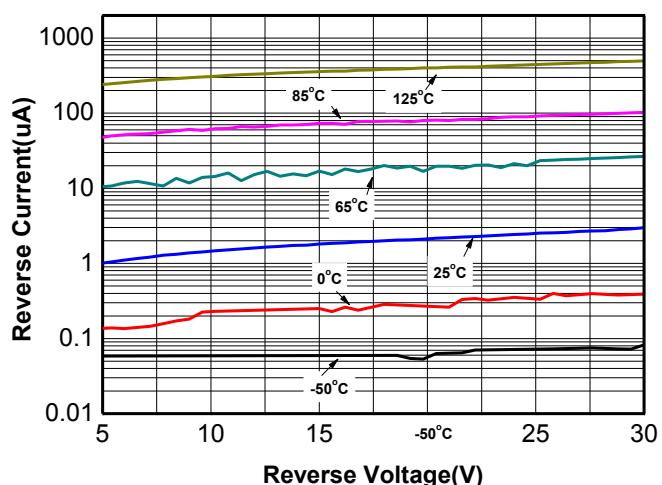


Reverse current vs. Reverse voltage

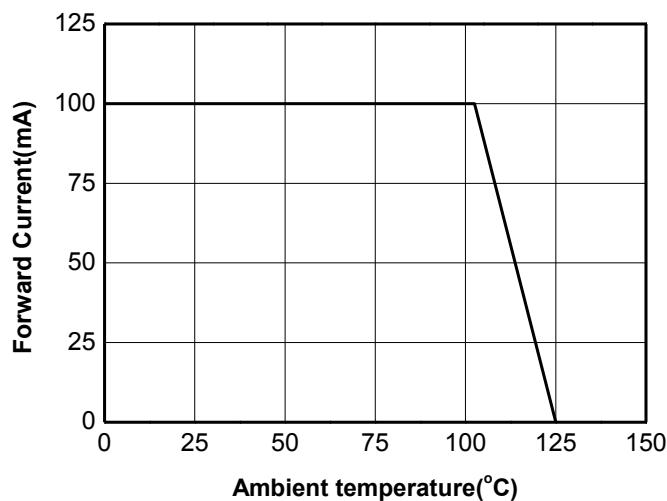

Forward current derating curve

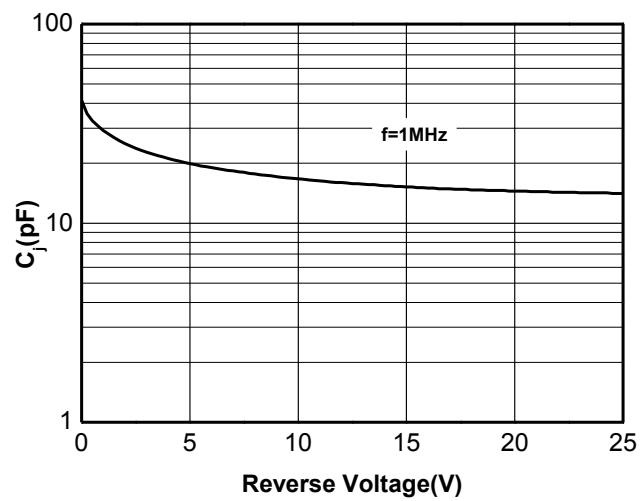


Junction capacitance vs. Reverse voltage

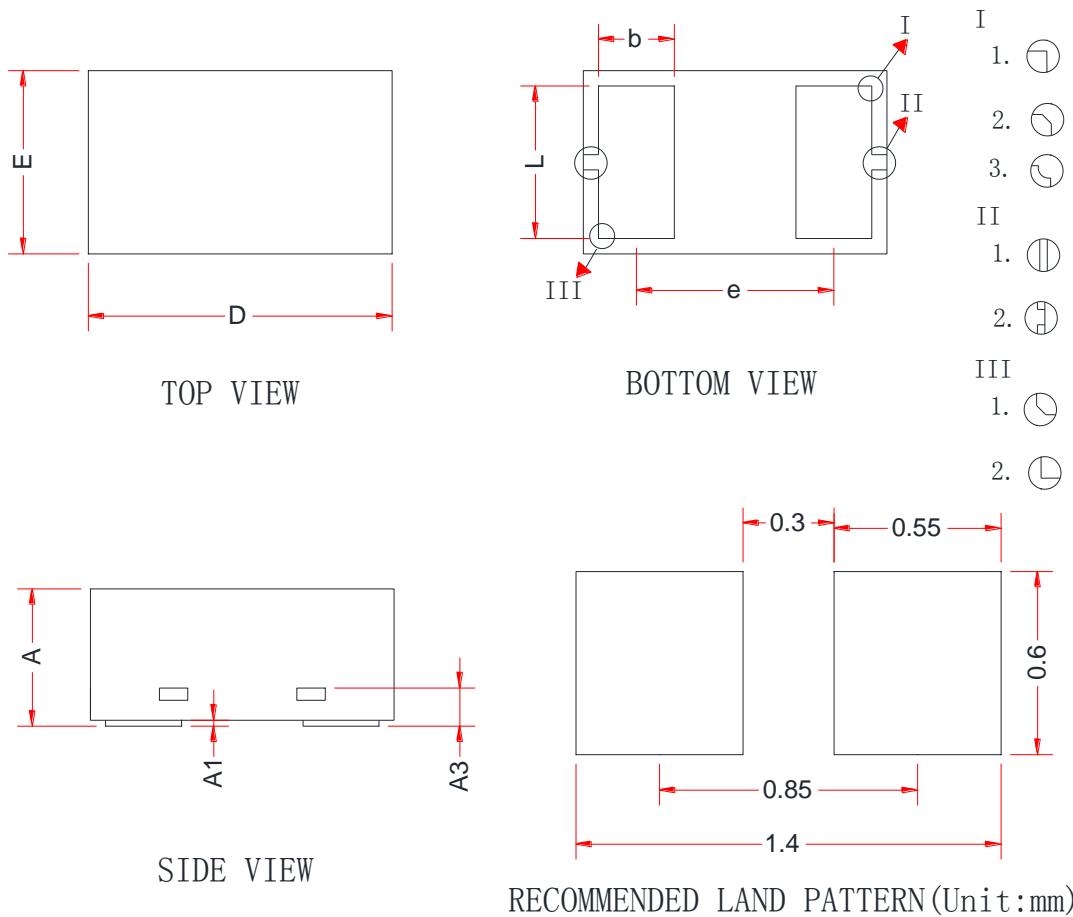PACKAGE OUTLINE DIMENSIONS
DFN1006-2L


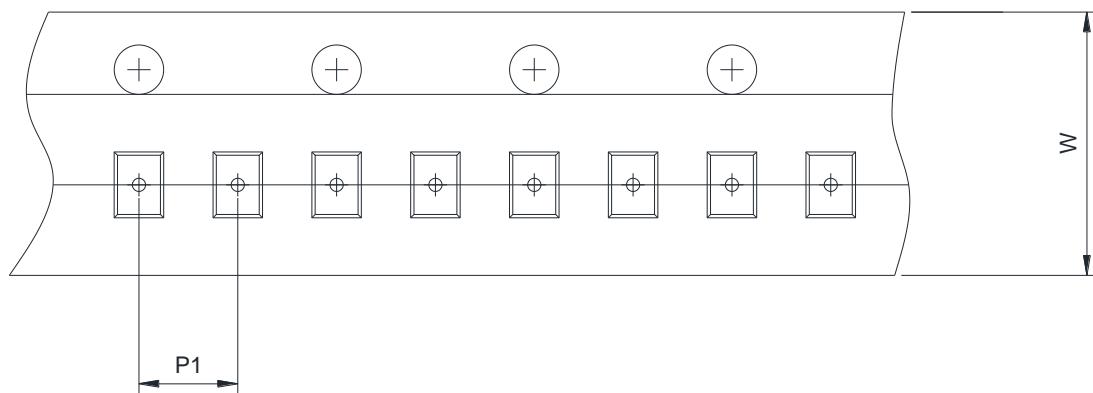
Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.36	0.45	0.53
A1	0.00	0.02	0.05
A3	0.125 Ref.		
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.65 BSC		

TAPE AND REEL INFORMATION


Reel Dimensions

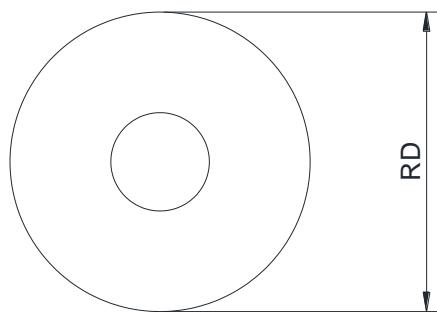

Tape Dimensions



Quadrant Assignments For PIN1 Orientation In Tape

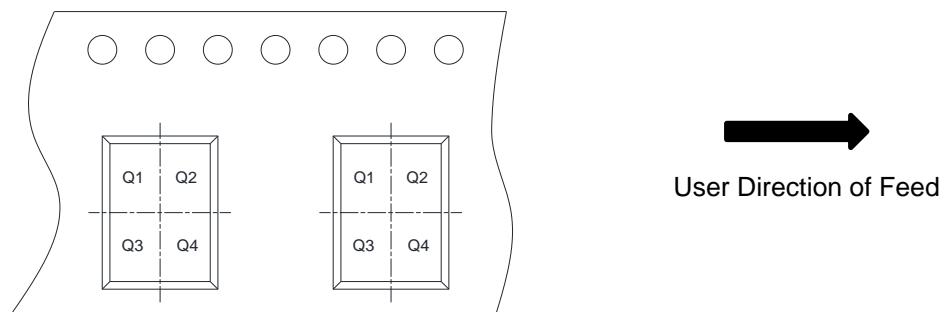

<input checked="" type="checkbox"/> RD	Reel Dimension	<input checked="" type="checkbox"/> 7inch	<input type="checkbox"/> 13inch		
<input checked="" type="checkbox"/> W	Overall width of the carrier tape	<input checked="" type="checkbox"/> 8mm	<input type="checkbox"/> 12mm <input type="checkbox"/> 16mm		
<input checked="" type="checkbox"/> P1	Pitch between successive cavity centers	<input checked="" type="checkbox"/> 2mm	<input type="checkbox"/> 4mm <input type="checkbox"/> 8mm		
<input checked="" type="checkbox"/> Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1	<input checked="" type="checkbox"/> Q2	<input type="checkbox"/> Q3	<input type="checkbox"/> Q4