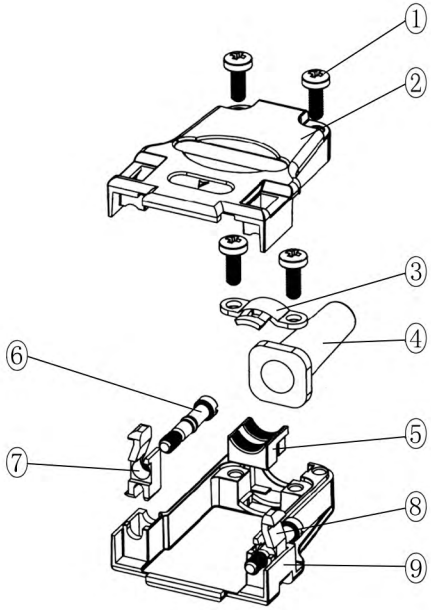

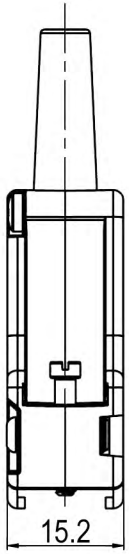

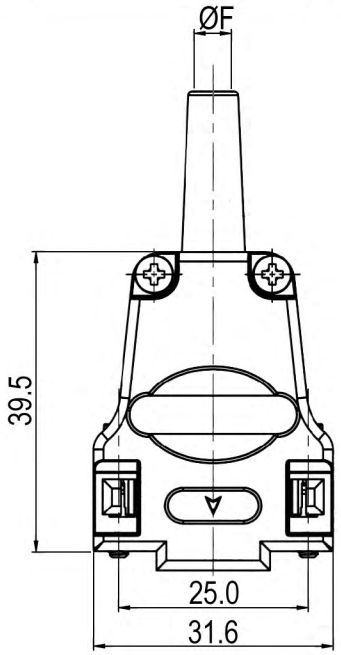

TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

Max cable ØF:
With Rubber Grommet: 6.5mm
W/O Rubber Grommet: 9.5mm

No. of contacts: 09-15-25-37

Item	QTY	Part description
1	4	Screw
2	1	Upper hood
3	1	Cable clamp
4	1	Rubber grommet
5	1	Plastic Insert
6	2	Jackscrew UNC4-40
7	1	Latch-1
8	1	Latch-2
9	1	Lower hood

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-09MB42

Drawing-No.
ASS_5283_CO

rev00

Replace

Sheet 1/4

SV4382

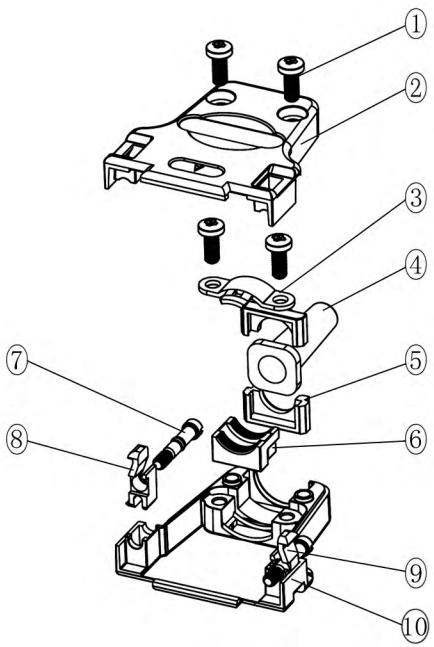

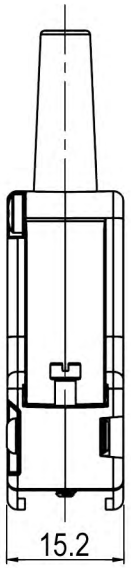

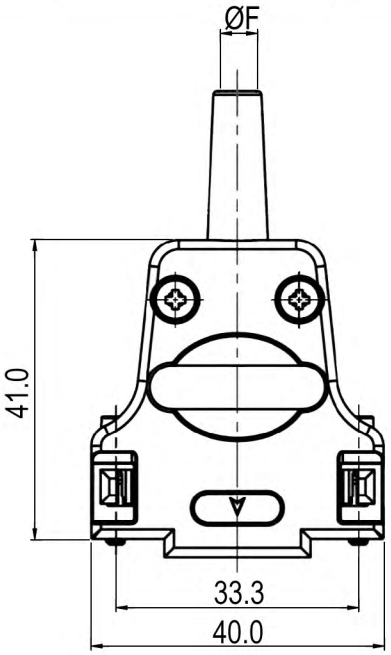

TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

Max cable ØF:
With Rubber Grommet: 6.5mm
W/O Rubber Grommet: 12.5mm

No. of contacts: 09-15-25-37

Item	QTY	Part description
1	4	Screw
2	1	Upper hood
3	1	Cable clamp
4	1	Rubber grommet
5	2	Reduction plate
6	1	Plastic Insert
7	2	Jackscrew UNC4-40
8	1	Latch-1
9	1	Latch-2
10	1	Lower hood

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-15MB42

Drawing-No.
ASS_5283_CO

rev00

Replace

Sheet 2/4

SV4382

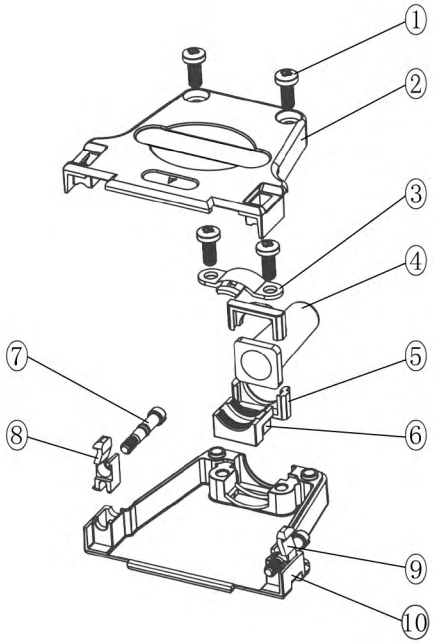

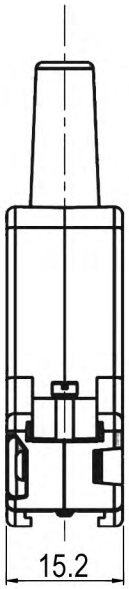

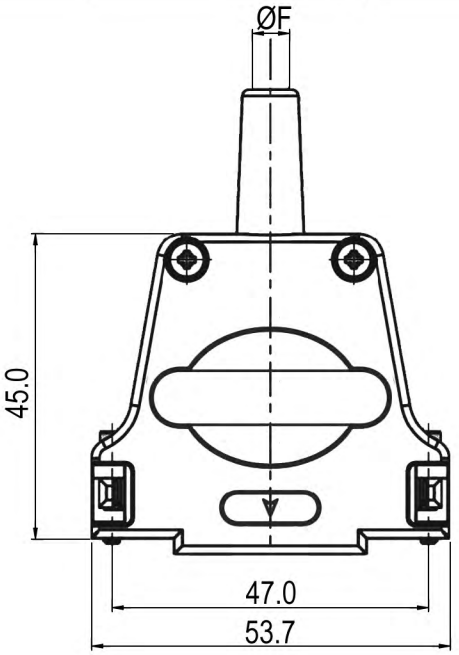

TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

Max cable ØF:
With Rubber Grommet: 8mm
W/O Rubber Grommet: 12.5mm

No. of contacts: 09-15-25-37

Item	QTY	Part description
1	4	Screw
2	1	Upper hood
3	1	Cable clamp
4	1	Rubber grommet
5	2	Reduction plate
6	1	Plastic Insert
7	2	Jackscrew UNC4-40
8	1	Latch-1
9	1	Latch-2
10	1	Lower hood

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-25MB42

Drawing-No.
ASS_5283_CO

rev00

Replace

Sheet 3/4

SV4382

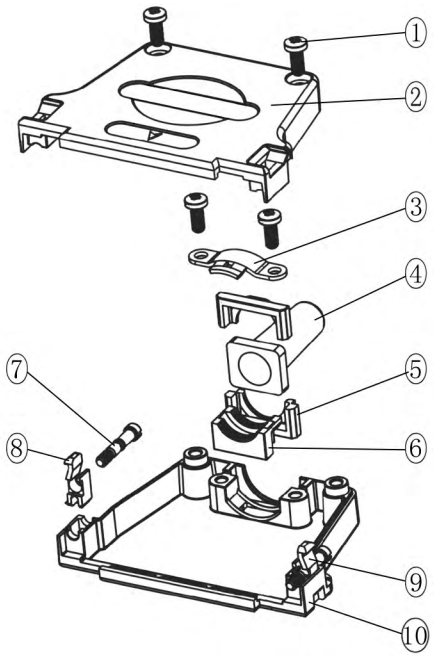

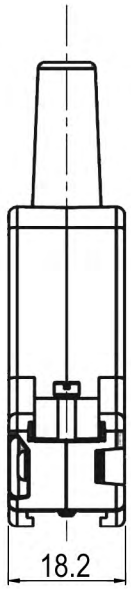

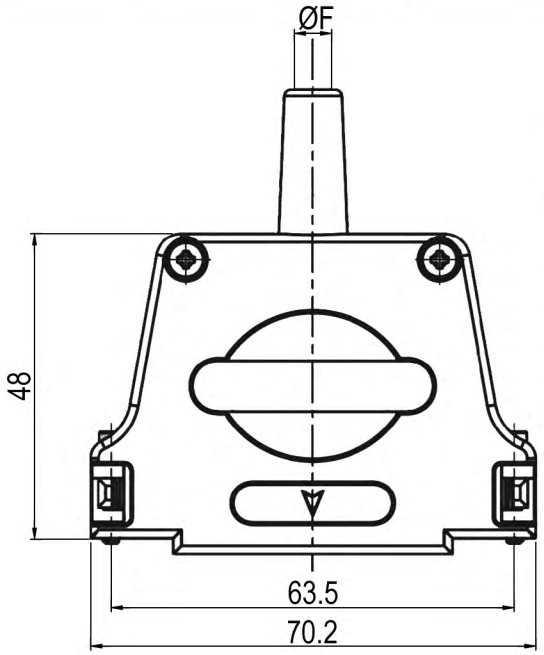

TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

Max cable ØF:
With Rubber Grommet: 9mm
W/O Rubber Grommet: 15mm

No. of contacts: 09-15-25-37

Item	QTY	Part description
1	4	Screw
2	1	Upper hood
3	1	Cable clamp
4	2	Rubber grommet
5	1	Reduction plate
6	1	Plastic Insert
7	2	Jackscrew UNC4-40
8	1	Latch-1
9	1	Latch-2
10	1	Lower hood

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
0~6	±0.10
6~30	±0.20
30~120	±0.30
120~400	±0.50
DIM	Tol
Angle	±1°
Angle	Tol

Id.	Modification	Date	Name
0	Drawn	17.08.2017	S.Bölling

	Date	Name
Drawn	17.08.2017	S.Bölling
Approved	17.08.2017	S.Bölling

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-37MB42

Drawing-No.
ASS_5283_CO

rev00

Replace

Sheet 4/4

SV4382