Potter & Brumfield | Potter & Brumfield W28

TE Internal #: 6-1393250-6 Thermal, Series Trip, Black, Operating Voltage 250 VAC, Operating Voltage 32 VDC, 2A Current Rating, 1 Pole, Potter & Brumfield W28, Circuit Breakers

View on TE.com >

Relays & Contactors > Circuit Breakers



Circuit Breaker Type: Thermal

Circuit Function: Series Trip

Illuminated: Without

Actuator Color: Black

Operating Voltage: 250 VAC

Features

Product Type Features

Circuit Breaker Style	Fuse Holder Type
Illumination Type	No Light
Actuator Type	Push to Reset



Circuit Breaker Type	Thermal
Illuminated	Without
Configuration Features	
Circuit Function	Series Trip
Number of Poles	1
Electrical Characteristics	
Operating Voltage	32 VDC
Current Rating	2 A
Interrupt Capacity	1000A @ 250VAC/32VDC
Body Features	
Bezel Color	Black
Actuator Color	Black
Contact Features	
Trip Time at 200%	4.5 – 28 seconds
Termination Features	

C For support call+1 800 522 6752

Thermal, Series Trip, Black, Operating Voltage 250 VAC, Operating Voltage 32 VDC, 2A Current Rating, 1 Pole, Potter & Brumfield W28, Circuit Breakers



Terminal Configuration	6.35 [.25] Straight Quick Connect Tab
Mechanical Attachment	
Mounting Bushing	None
Mounting Options	Snap-In Panel Mount
Dimensions	
Panel Thickness (Recommended)	1.91 – 2.67 mm[.075 – .105 in]
Identification Marking	
Stamped Marking Type	White Rate Marking
Dreduct Convolion of	
Product Compliance For compliance documentation, visit the product page on TE.com>	Compliant with Exampliana
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Halogen Content

SVHC > Threshold:

Cadmium oxide (1.55% in Component)

Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Thermal, Series Trip, Black, Operating Voltage 250 VAC, Operating Voltage 32 VDC, 2A Current Rating, 1 Pole, Potter & Brumfield W28, Circuit Breakers



Compatible Parts





Also in the Series **Potter & Brumfield W28**



Circuit Breakers(45)

Customers Also Bought

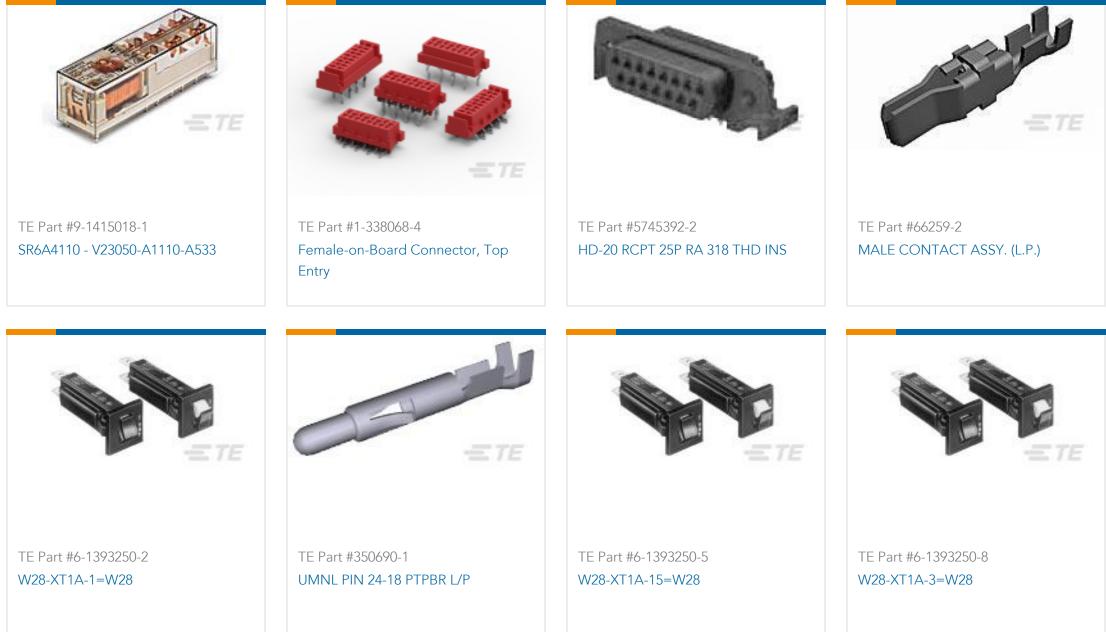

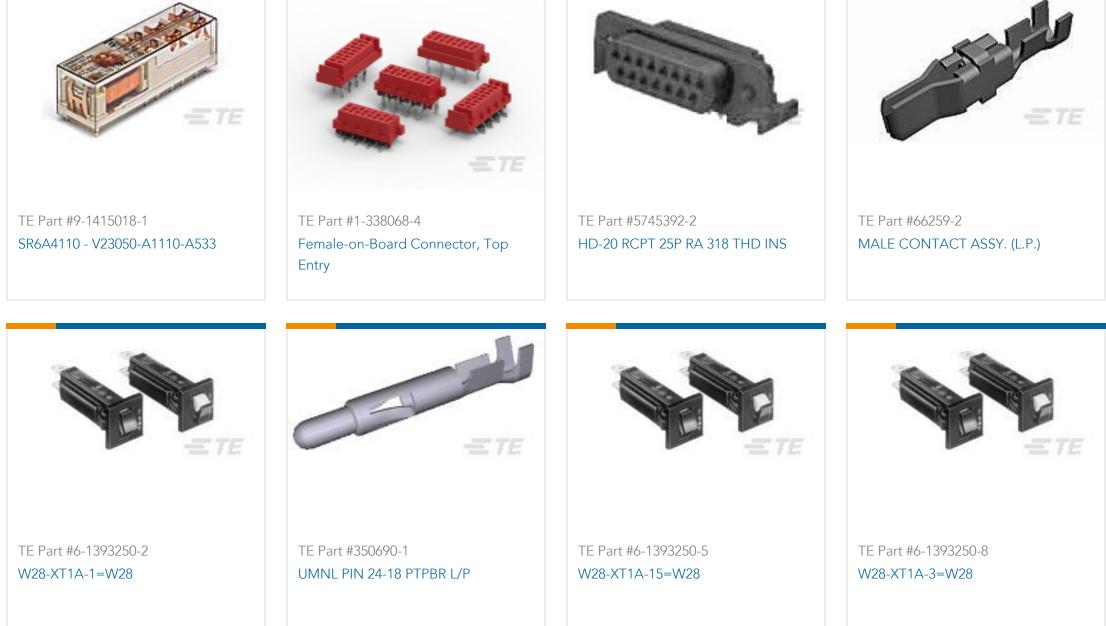





Thermal, Series Trip, Black, Operating Voltage 250 VAC, Operating Voltage 32 VDC, 2A Current Rating, 1 Pole, Potter & Brumfield W28, Circuit Breakers





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1393250-6_E.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_6-1393250-6_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1393250-6_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages W28 Push to Reset Fuseholder-Type Thermal Circuit Breaker

English

Agency Approvals VDE Certificate

English