

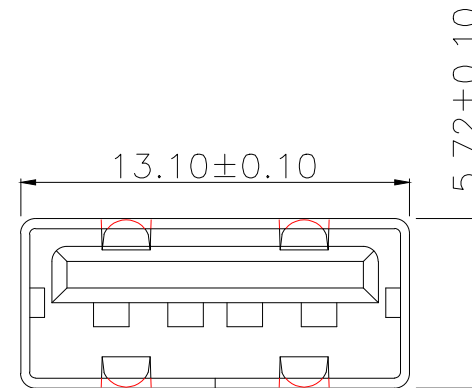


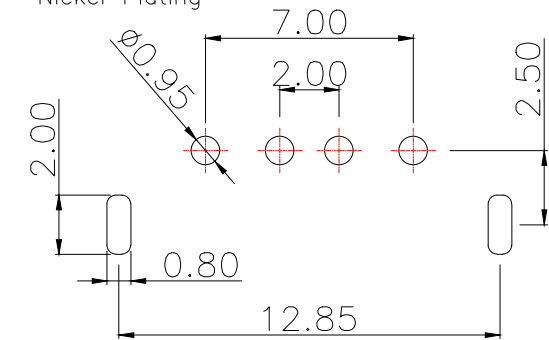

- 1.Current Rating
1.5A/contact terminal
- 2.Voltage Rating
30V DC
- 3.Contact Resistance
30 milliohms MAX
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.Insulation Resistance:
1000MEGA ohms MIN

Nickel Plating

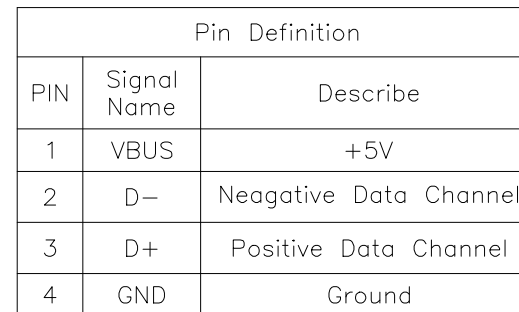

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:		
			USB-AF-180°直脚13.7		
PAR	USB-256-BRWH137				
DWN					
CHKD					
APVD					
DECIMALS:	ANGLES:		SCALE: N:A	UNIT:MM	
X.X±0.30	X.*±5°		SIZE:A4	SHEET:1F1	REV:A
X.XX±0.25	X.X'±1°				
X.XXX±0.15		CUSTOMER COPY			