

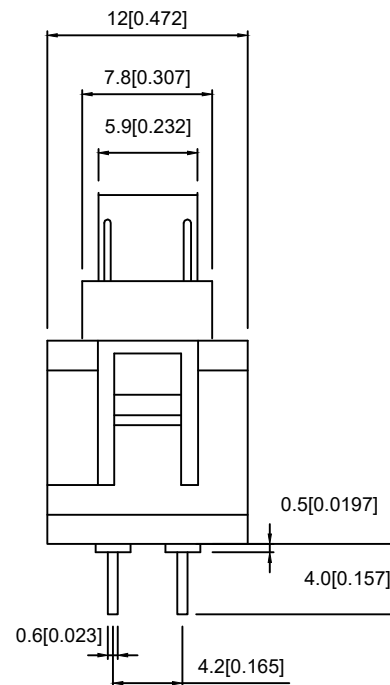




● Contact rating	0.1 A, 30VDC
● Contact resistance	50mWMax.
● Insulation resistance	100MWWMin. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.



2P ON-OFF

⑤	Terminal	—	2	Brass	ag Plated	_____
④	Contact	—	2	Phosphor Bronze	ag Plated	_____
③	Base	—	1	Poly		_____
②	Cover	—	1	Pa66		_____
①	Keystone	—	1	Daicel		_____
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: KEY SWITCH			
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:			
Δx					X.X	±0.2mm	CHKD		DATE		UNIT: mm/in	DWG NO.:			
Δx					X.XX	±0.1mm	APPD		DATE		SIZE: A4	XKB11E01			
Δx					X.XXX	±0.05mm									
MARK	DESCRIPTION			DATE	REVISED	APPROVED									
REVISIONS						UNSPECIFIED TOLERANCES									
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED						WEIGHT 1.0g	SHEET 1/1	REVISION A0	