

You are here: Products » Connectors f.con » PCB connectors » Jumpers » CAB 10 G S » CAB 10 G S


- ▶ Heatsinks f.cool
- ▶ Cases f.case
- ▼ Connectors f.con
 - ▶ Sockets
 - ▼ PCB connectors
 - Male headers
 - Female headers
 - Direct female connector
 - Jumpers
 - ▶ IDC-connectors
 - ▶ D-Sub connectors
 - Brackets for PC
 - ▶ Optoelectronics

Jumpers

CAB 10 G S

for square 0.5 mm and Ø 0.4-0.5 mm

add to request

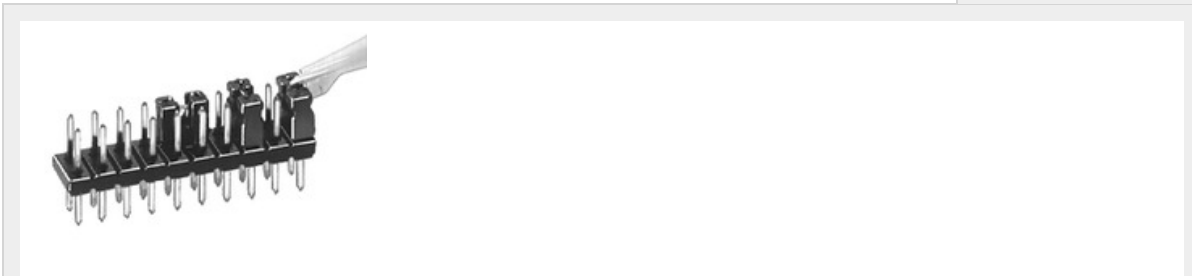

Features Technical Drawing

no. of contacts	2
surface contact / contact sleeve	0,1µm Au
insertion depth	4mm...durchsteckbar
nominal current	1.5 A
nominal voltage	150 V DC
material isolation body	PBT
temperature range	-40 °C ... +105 °C
grid	2 mm
version	open, suitable for miniature test probes
colour	black
reflow solderable	no

