



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

**1850-1910 MHz / 1930-1990 MHz
LTE Cavity Duplexer/Diplexer
Part Number: AD1880-1960D237**



Mechanical


Mounting Method:	Threaded Mounting Holes
Connector Type:	Low I.M. N-(F)
Dimensions:	11.60 x 8.40 x 1.50 in.

Environmental

Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C
Shock:	20 G. 11ms
Vibration:	20 G. 5 to 200 Hz

Characteristics	Band 1	Band 2
Passband:	1850-1910 MHz	1930-1990 MHz
Bandwidth:	60 MHz	60 MHz
Passband Return Loss:		
Passband Insertion Loss:	> 1.2 dB	> 1.2 dB
Passband Ripple:	< 0.8 dB	< 0.5 dB
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	90 dB	90 dB
Power Handling:	150 Watts	150 Watts

Outline Drawing:

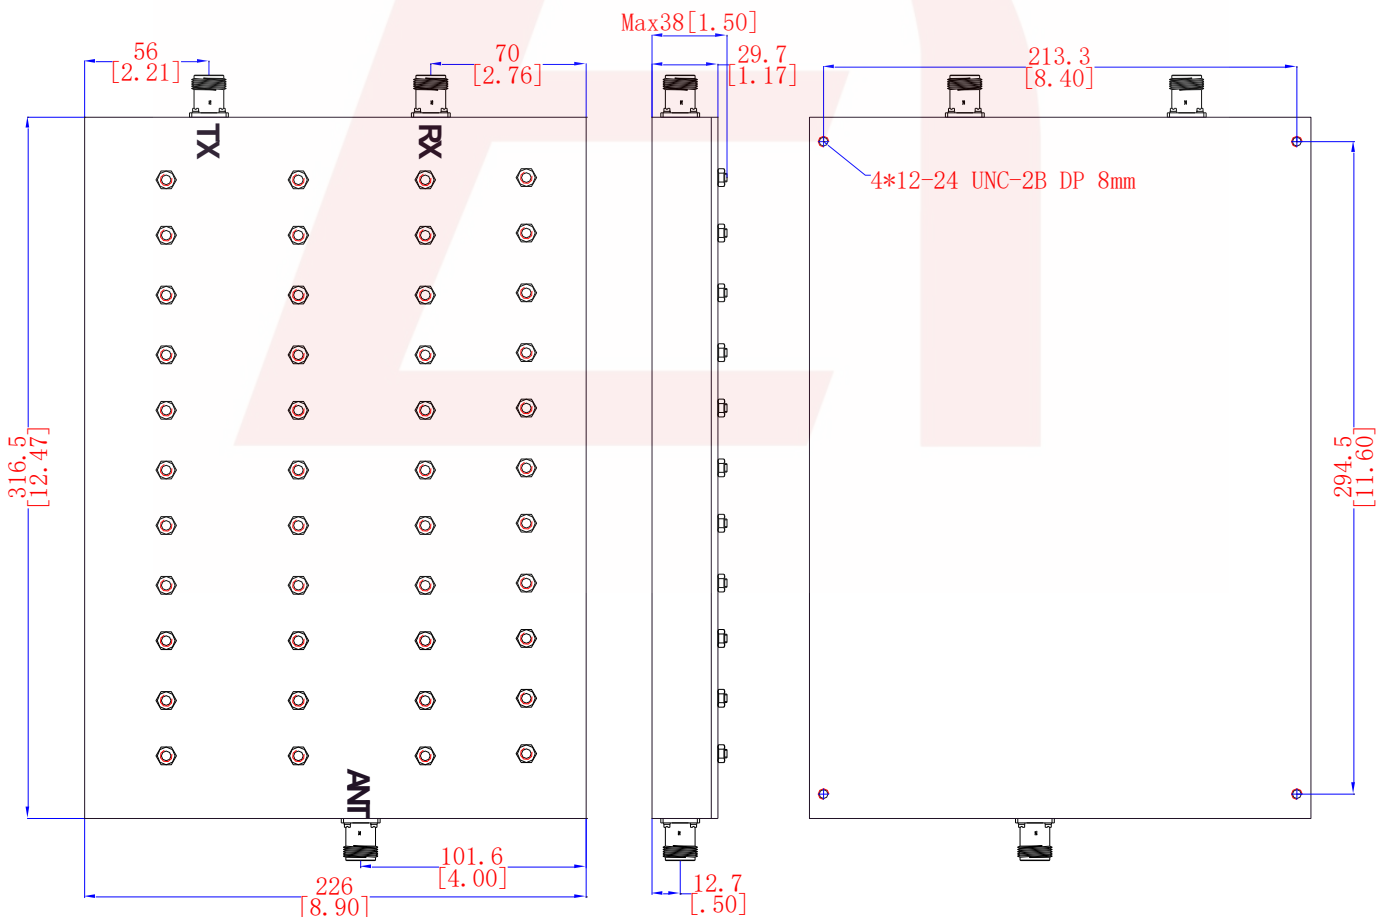

DS-D237-08202015-Rev1




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1850-1910 MHz / 1930-1990 MHz
LTE Cavity Duplexer/Diplexer
Part Number: AD1880-1960D237



Response Plot:

7/14/2021 1:29:42 PM

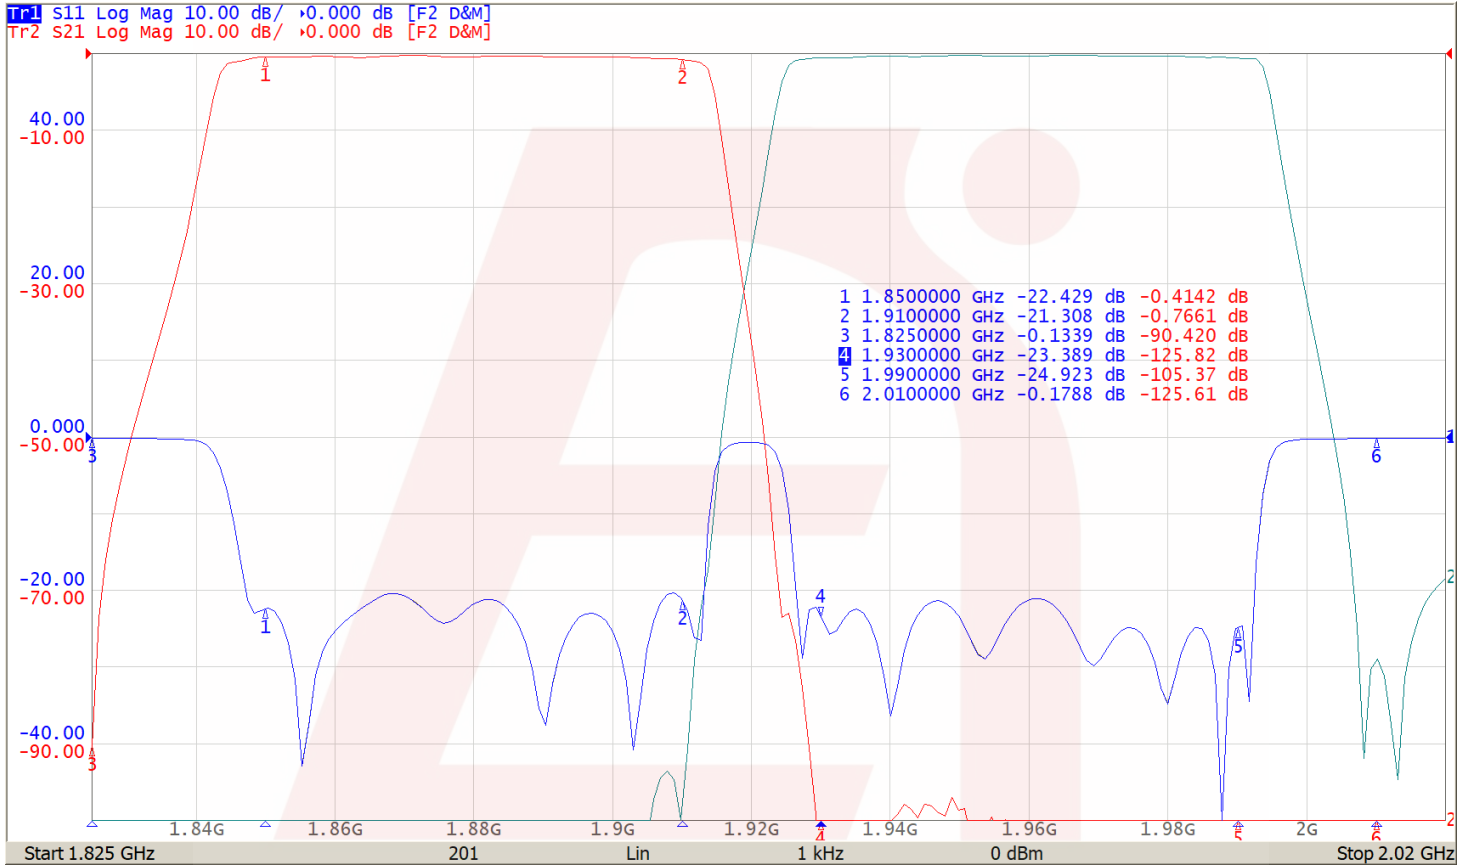

DS-D237-08202015-Rev1