
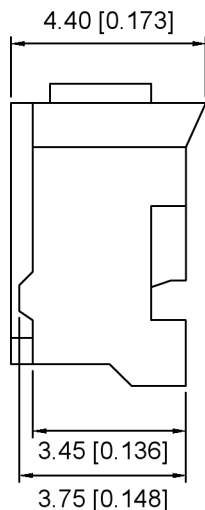




Specifications:  
Voltage rating:250V AC/DC  
Current rating:2A AC/DC  
Withstanding voltage:800V AC/minute  
Temperature range:-40℃~+85℃  
Insulation resistance:≥1000MΩ  
Contact resistance:≤20mΩ

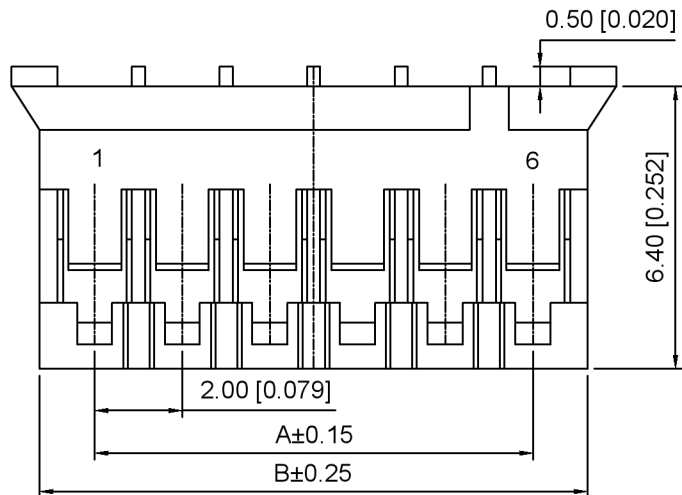

X2016 H M - XX - N0  
① ② ③ ④ ⑤

- 1.Series No  
2.Category:H-Housing  
3.M-Male  
4.Row No.Pin No:XX-02~16P  
5.Material:N0-PA66 UL 94V-0

| POLES | A     | B     | C     |
|-------|-------|-------|-------|
| 2     | 2.00  | 4.60  | 5.80  |
| 3     | 4.00  | 6.60  | 7.80  |
| 4     | 6.00  | 8.60  | 9.80  |
| 5     | 8.00  | 10.60 | 11.80 |
| 6     | 10.00 | 12.60 | 13.80 |
| 7     | 12.00 | 14.60 | 15.80 |
| 8     | 14.00 | 16.60 | 17.80 |
| 9     | 16.00 | 18.60 | 19.80 |
| 10    | 18.00 | 20.60 | 21.80 |
| 11    | 20.00 | 22.60 | 23.80 |
| 12    | 22.00 | 24.60 | 25.80 |
| 13    | 24.00 | 26.60 | 27.80 |
| 14    | 26.00 | 28.60 | 29.80 |
| 15    | 28.00 | 30.60 | 31.80 |
| 16    | 30.00 | 32.60 | 33.80 |

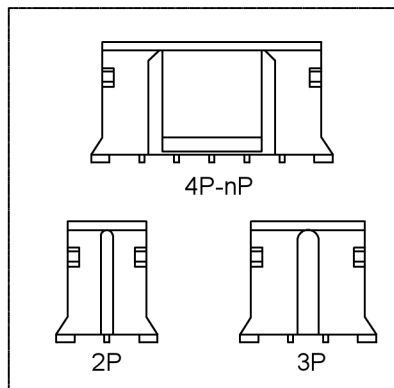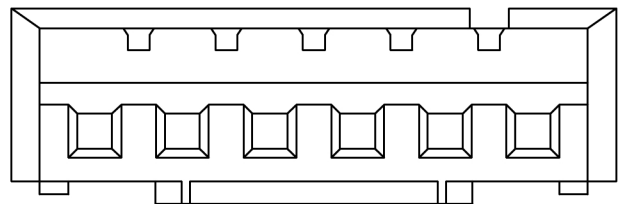

|               |               |                       |                               |
|---------------|---------------|-----------------------|-------------------------------|
| X2016HM-XX-N0 | PA66 UL 94V-0 | X2016TF               | X2016W X2016HF                |
| PARY NO       | Matrial       | Suitable XKB Terminal | Suitable XKB Wafer or Housing |

|                                      |  |             |                                             |
|--------------------------------------|--|-------------|---------------------------------------------|
| DSND                                 |  | SCALE: N/A  | MODEL TYPE:<br>2.0mm Crimp Style Connectors |
| DWN                                  |  | VIEW:       | PART NO.:<br>X2016HM-XX-N0                  |
| CHKD                                 |  | UNIT: mm/in | DWG NO.:<br>X-X2016HM-XX-N0                 |
| APPD                                 |  | SIZE: A4    |                                             |
| XKB INDUSTRIAL PRECISION CO.,LIMITED |  |             | WEIGHT                                      |
|                                      |  |             | SHEET                                       |
|                                      |  |             | REVISION                                    |
|                                      |  |             | 1/1                                         |
|                                      |  |             | A0                                          |

|                                               |  |  |  |  |                        |      |
|-----------------------------------------------|--|--|--|--|------------------------|------|
|                                               |  |  |  |  | ANGLAR                 | ±5°  |
| ΔX                                            |  |  |  |  | L≤ 4                   | ±0.2 |
| ΔX                                            |  |  |  |  | 4<L≤ 16                | ±0.3 |
| ΔX                                            |  |  |  |  | 16<L≤ 63               | ±0.4 |
| MARK                                          |  |  |  |  | L> 63                  | ±0.5 |
| REVISIONS                                     |  |  |  |  | UNSPECIFIED TOLERANCES |      |
| www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |  |  |  |  |                        |      |