

AMP | Junior Power Timer

TE Internal #: 2-963214-1 Housing for Female Terminals, Wire-to-Wire, 10 Position, 5 mm [. 197 in] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Power Timer

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector System: Wire-to-Wire

Number of Positions: 10

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: Yes

All Timer Connector Housing (510)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	10
Number of Rows	2
Electrical Characteristics	
Nominal Voltage Architecture	12 V
Body Features	
Primary Product Color	Gray
Connector & Keying Code	B1
Contact Features	

C For support call+1 800 522 6752

10/23/2024 12:11AM | Page 1

Housing for Female Terminals, Wire-to-Wire, 10 Position, 5 mm [.197 in] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Power Timer



Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	37.75 mm[1.486 in]
Product Width	26.3 mm[1.035 in]
Product Length	42.3 mm[1.665 in]
Row-to-Row Spacing	6 mm[.236 in]
Jsage Conditions	
Operating Temperature (Max)	80 °C[176 °F]
Operating Temperature Range	-40 – 80 °C[-40 – 176 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	840
Packaging Method	Carton
Other	
Serviceable	No
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Female Terminals, Wire-to-Wire, 10 Position, 5 mm [.197 in] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Power Timer



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | Junior Power Timer

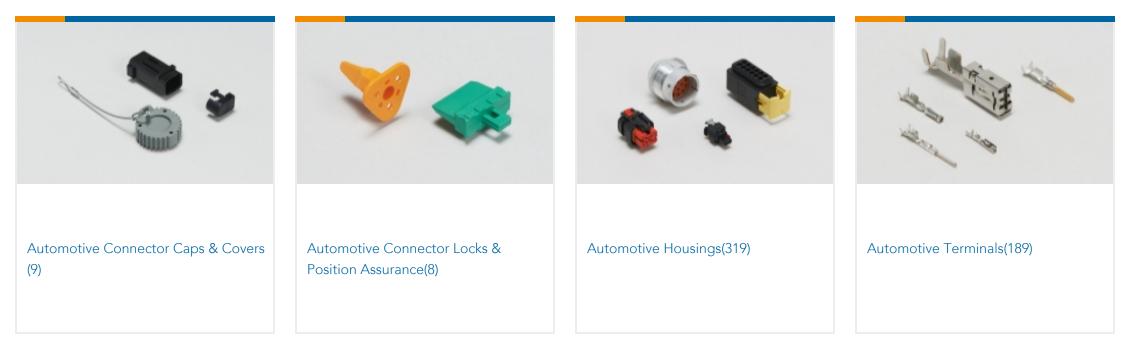


Housing for Female Terminals, Wire-to-Wire, 10 Position, 5 mm [.197 in] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Power Timer



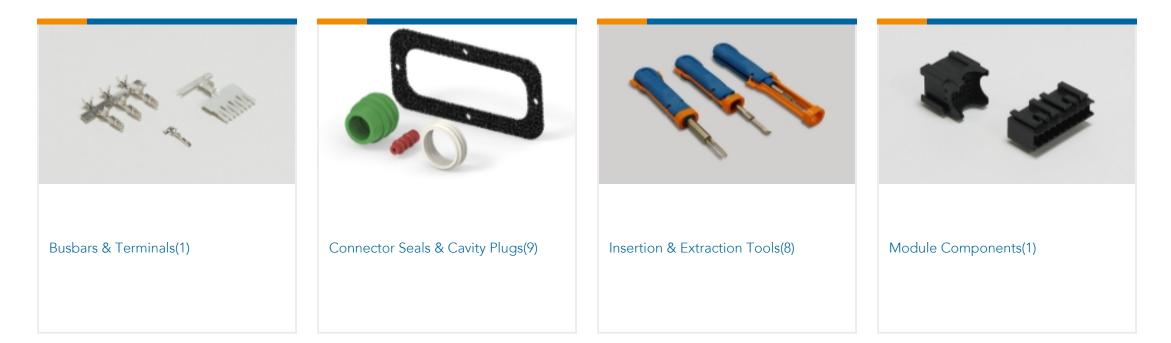

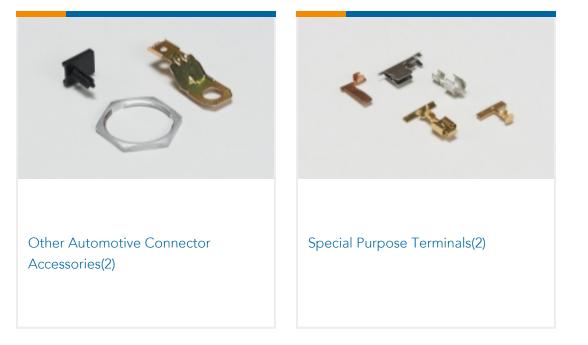

Customers Also Bought

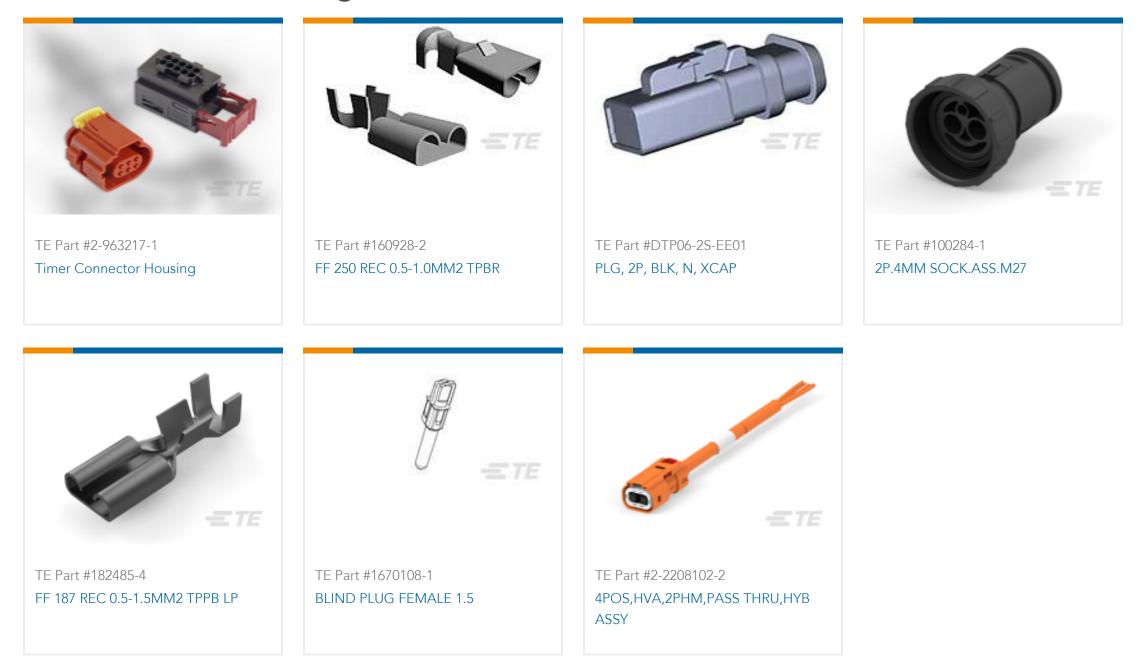

Documents

Product Drawings 10P J-P-T GEH KOMPL
English
CAD Files 3D PDF
English
Customer View Model ENG_CVM_2-963214-1_D.2d_dxf.zip

Housing for Female Terminals, Wire-to-Wire, 10 Position, 5 mm [.197 in] Centerline, Sealable, Gray, Wire & Cable, Power, Junior Power Timer



English

Customer View Model ENG_CVM_2-963214-1_D.3d_igs.zip English

Customer View Model

ENG_CVM_2-963214-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English