

Series ————— **D xx S 24B 6 xx 22 LF**

Number of contacts
09 , 15 , 25 , 37

Contacts
S : Socket

Plating
6 : 500 Mating / Unmating Mini

Packaging specification
Tape and Reel For connector with cap

See Note RoHS

Termination

Code	Type	Foot Print/Pitch	Length of termination	PCB thickness
24B	Straight version	6 / 2.84mm	2.90	2.4

NOTE RoHS INFORMATION

- The "LF" product meet european union Directives and other country regulations asdescribed in GS-22-008.
- The housing will whistand exposure to 260^o peak temperature for 30 seconds in a convection , infra-red or vapor reflow oven. See application notes/procedures if are available.
- Termination plating spec:1.27μ Nickel mini,2.5 to 7.5μ Sn(pure mate)
- Shell plating : Nickel bright
- Accessories : Sn pure bright
- Packaging spec ; See GS-14-920

Mounting Options

RL	Insert M3
RV	Female Screw UNC 4-40
RX	Insert UNC 4-40


Product Specification




see : GS-12-372

Packaging Specification

See GS-14-1052


rev	ecn no	dr	YY/MM/DD
I	CREATED	HLE	22/08/06
A	LS06-0223	PCR	2006/12/21
B	LS08-0112	HLE	2008-04-21
C	LS08-0116	HLE	2008-04-24
D	110-0197	NG	2010-10-14
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - 		tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 			
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	P.CRON	22/08/06	ANGULAR	LINEAR	0.X	±0.3	size A3	Scale 2:1				
Eng	H.LEGALLIC	22/08/06			0.XX	±0.1						
Chr	NIRMAL G	2010-10-14			0.XXX	±0.05						
Appr	SUDHIR V	2010-10-14	Product family				-	Spec ref			-	
		title	SUB DELTA D PIP FEMALE H=2.9				dwg no	C01-8646-0888			Rev. D	
			straight for tape and reel packaging									
			catalog no									SEE TABLE
			CUSTOMER		sheet 1 of 2							

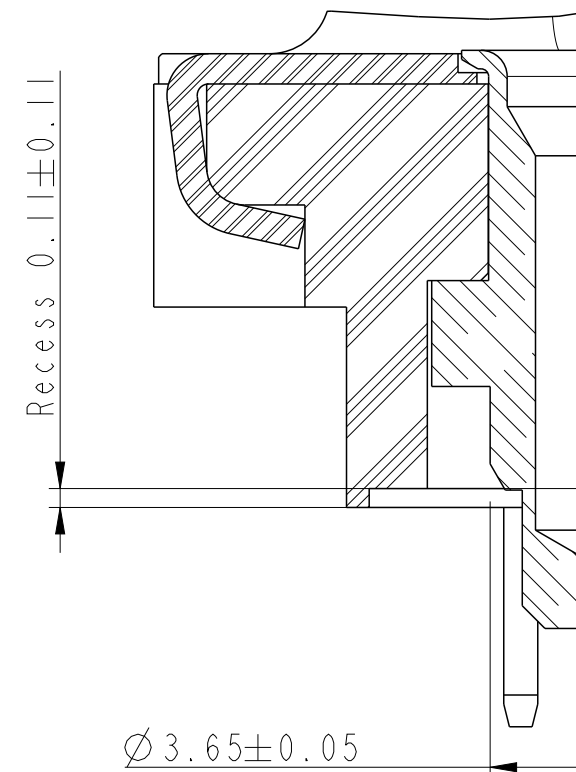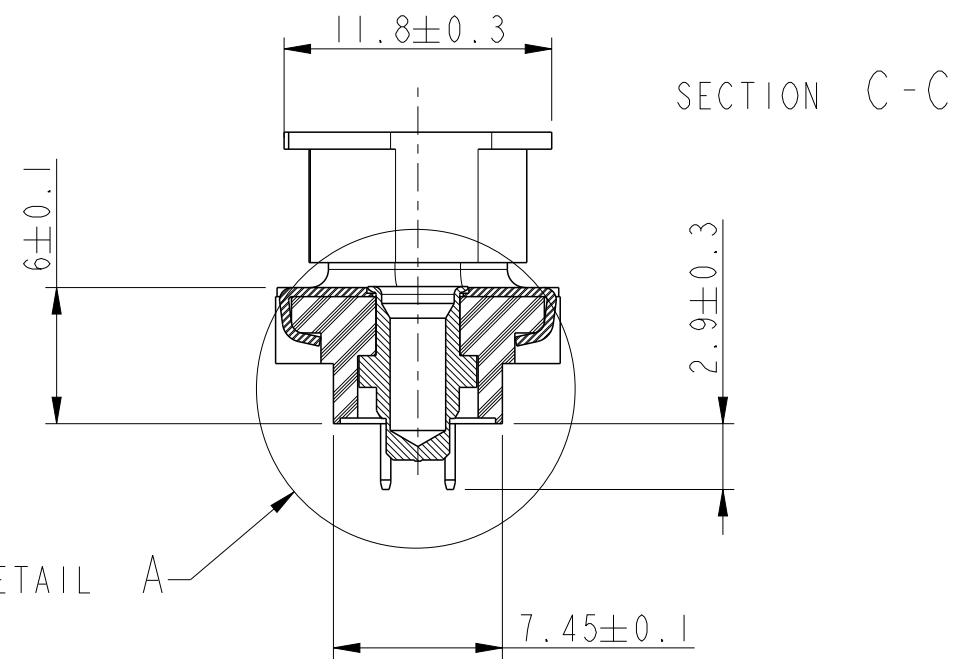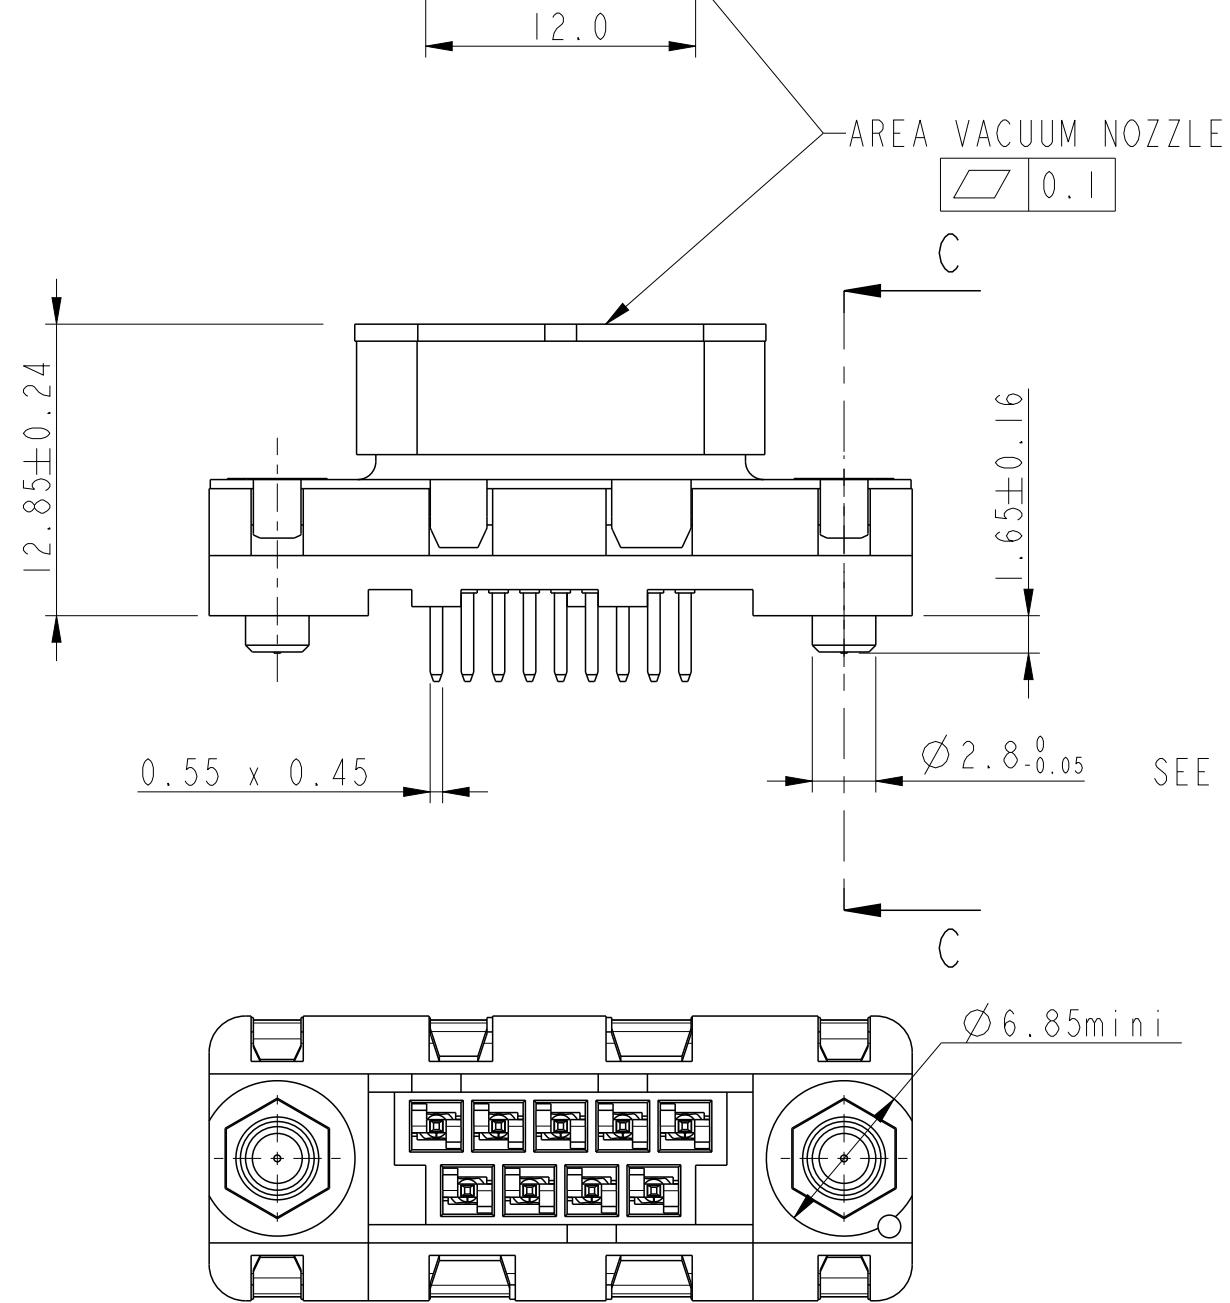


TRUE POSITIONING : $\oplus$ $\ominus$ 0


Accessories details

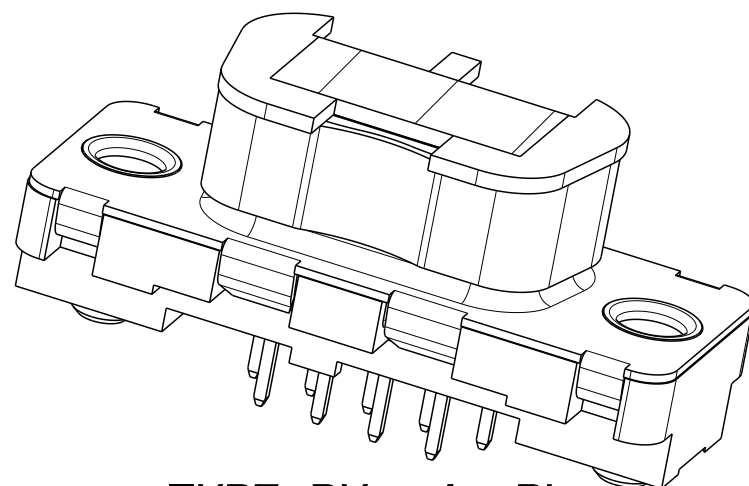

TYPE RX / RL

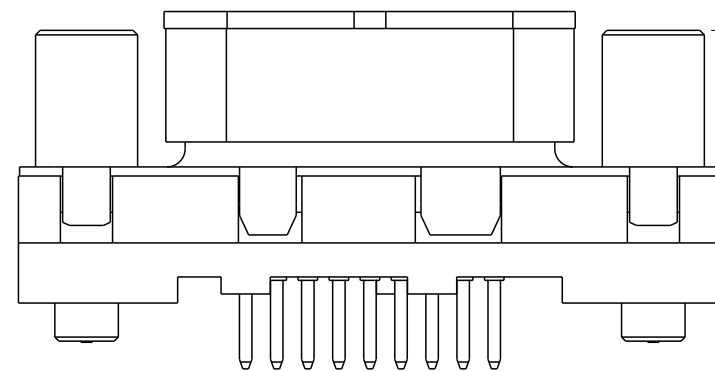

TYPE RV

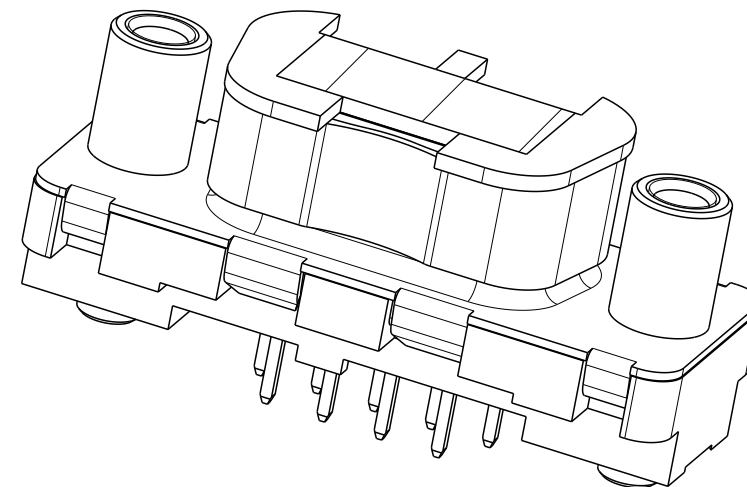

SHELL	P/N LEAD FREE
09	D09S04B6xx22L
15	D15S04B6xx22L
25	D25S04B6xx22L
37	D37S04B6xx22L

www

Dr	P. C
Eng	H. L
Chr	NIF
Appr	SUD

