


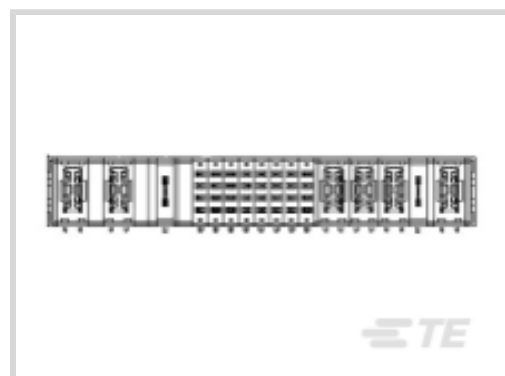

Connectors &gt; Power Connectors &gt; Backplane Power Connectors

PCB Connector Assembly Type: **PCB Mount Header**Connector System: **Board-to-Board**Number of Positions: **7**PCB Mount Orientation: **Right Angle**Backplane Architecture: **Traditional Backplane**

## Features

### Product Type Features

Connector & Housing Type	Receptacle
PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of Power Positions	7
Number of Columns	7
Number of Signal Positions	0
Number of Positions	7
PCB Mount Orientation	Right Angle
Backplane Architecture	Traditional Backplane
Stackable	No

### Electrical Characteristics

Operating Voltage	300 VDC
-------------------	---------

### Contact Features

PCB Contact Termination Area Plating Material Thickness	.127 $\mu\text{m}$ [5 $\mu\text{in}$ ]
Contact Type	Socket
Contact Mating Area Plating Material Thickness	1.27 $\mu\text{m}$ [50 $\mu\text{in}$ ]



Contact Mating Area Plating Material	Gold over Nickel
--------------------------------------	------------------

Contact Underplating Material	Nickel
-------------------------------	--------

PCB Contact Termination Area Plating Material	Gold
---	------

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Current Rating (Max)	75 A
------------------------------	------

### Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

### Mechanical Attachment

Mating Alignment Type	Guide Hardware
-----------------------	----------------

### Housing Features

Housing Material	Thermoplastic
------------------	---------------

Housing Color	Black
---------------	-------

### Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Power
---------------------	-------

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 2314581-1  
VERT RECPT, MULTI-BEAM XLE, VITA 62

## Customers Also Bought



TE Part #8-323915-1  
TERMINAL,PIDG R 26-22 6



TE Part #2000676-2  
Keyed Guide Pin, Machined, Vita 46




TE Part #1-1469492-7  
MULTIGIG RT 9MM GUIDE/ESD 270 DEG



TE Part #1-2176304-8  
RP 1E 0.1W 15R 0.1% 25PPM 5K RL



TE Part #3573650001  
TMS-SCE-3/16-2.0-S1-9



TE Part #1410946-2  
MULTI-GIG SOC. CAP SCREW, CUSTOMIZED HDW



TE Part #8-1879417-1  
CPF0603 845K 0.1% 25PPM 1K RL



TE Part #2302785-1  
RA PLUG ASSY,7ROW,CENTER,VPX, MG RT3



## Documents

### Product Drawings

[R/A HEADER, MULTI-BEAM XLE, VITA 62](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2314577-1\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2314577-1\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2314577-1\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[SOSA Aligned Interconnect Solutions](#)

English