


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	LONGITUDINAL SHRINKAGE VALUE UPDATED	11DEC2023	BDA	VN

VERSAFIT-3X (3:1 RATIO)

SINGLE WALL TUBE. A COMMERCIAL GRADE HEAT SHRINK TUBE PRIMARILY USED FOR ELECTRICAL INSULATION. HAS A UL224 APPROVAL. AVAILABLE IN SEVERAL COLOURS.

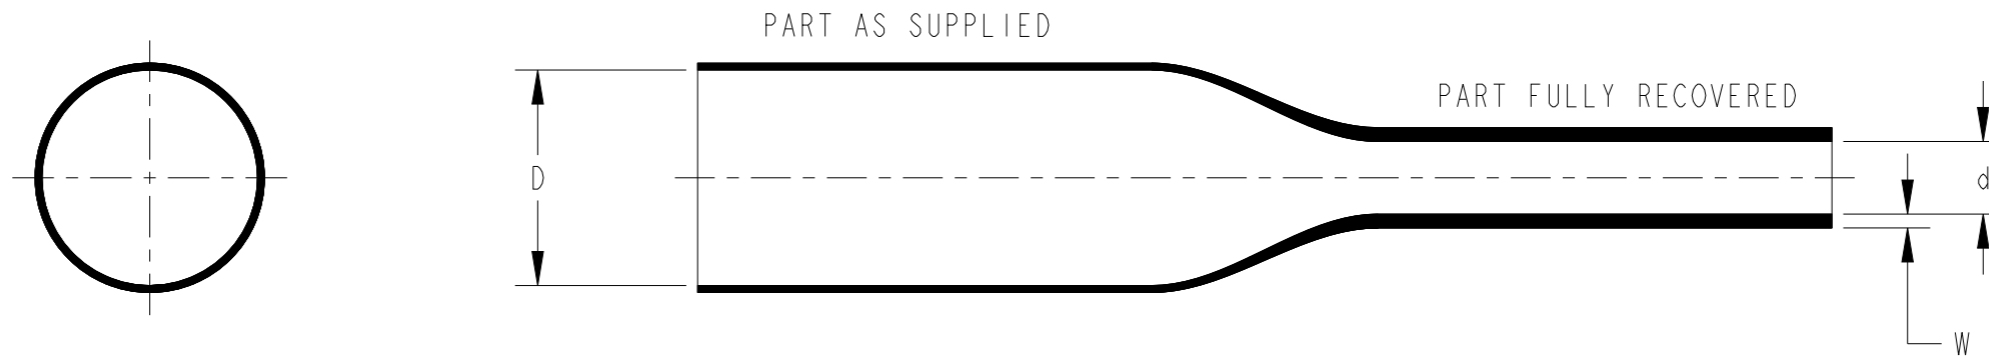

PRODUCT DIMENSIONS

SIZE	AS SUPPLIED		RECOVERED							
	INSIDE DIAMETER MINIMUM (D)		INSIDE DIAMETER MAXIMUM (d)		WALL THICKNESS (W)					
	mm.	in.	mm.	in.	MINIMUM		MAXIMUM		NOMINAL	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
1/8	3.20	0.126	1.10	0.043	0.50	0.020	0.66	0.026	0.58	0.023
1/4	6.40	0.252	2.20	0.087	0.50	0.020	0.66	0.026	0.58	0.023
3/8	9.50	0.374	3.20	0.126	0.53	0.021	0.69	0.027	0.61	0.024
1/2	12.70	0.500	4.30	0.169	0.53	0.021	0.69	0.027	0.61	0.024
3/4	19.10	0.752	6.40	0.252	0.53	0.021	0.69	0.027	0.61	0.024
1	25.40	1.000	8.50	0.335	0.56	0.022	0.72	0.028	0.64	0.025

PRODUCT INFORMATION

SHRINK RATIO - 3:1

LONGITUDINAL SHRINKAGE ON FULL RECOVERY +0 TO -15%


STANDARD COLOURS: BLACK.
NON-STANDARD COLOURS: BROWN, RED, ORANGE, YELLOW, GREEN, BLUE, VIOLET, GREY, WHITE
FLAME RETARDANT

TUBING CUT TO SPECIFIC LENGTHS CAN BE SUPPLIED FROM THE PRODUCT SIZES REFERENCED WITHIN THIS DRAWING.

STANDARD CUTTING TOLERANCES (mm)	
CUT LENGTH	TOLERANCE
UPTO TO 9.90mm	±1.50mm
10mm TO 24.90mm	±1.50mm
25mm TO 54.90mm	±1.50mm
55mm TO 99.90mm	±3.00mm
100mm TO 149.90mm	±4.00mm
150mm TO 499.90mm	±5.00mm
500mm AND GREATER	±25.40mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm (Inches)



MATERIAL
SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.1
2 PLC ±0.01
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±
FINISH -

DWN	06MAR2023
BASAVARAJA D A	
CHK	06MAR2023
SELVAPANDIAN B	
APVD	06MAR2023
MAYO BAKARE	
PRODUCT SPEC	RW-3009
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	



NAME
VERSAFIT(3:1 RATIO)-IRRADIATED
MODIFIED POLYOLEFIN SINGLE WALL
HEAT SHRINK TUBING

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	VERSAFIT_3_TO_1	-
SCALE		SHEET	REV
NTS		1 OF 1	B2