



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.27	阿树

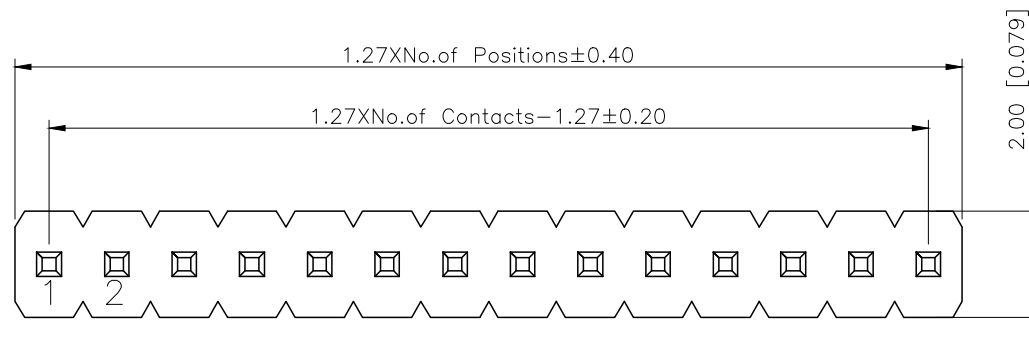


规格 Specifications:
额定电压 Voltage rating:250VAC/DC.
额定电流 Current rating:1A AC/DC
耐电压 Withstanding voltage:300V AC/minute
温度区间 Temperature range:-40℃to+105℃
绝缘电阻 Insulation resistance: $\geq 500\text{M}\Omega$ Min
接触电阻 Contact resistance: $\leq 20\text{M}\Omega$ Max
材料 Material: PA6T 94V-0
镀层 Planting Category: 1U''Gold
波峰焊温度 Wave soldering temperature:255±5℃,10s

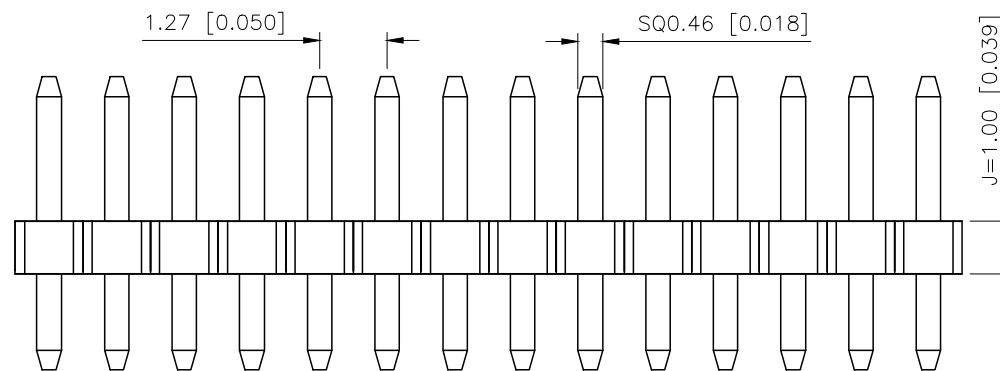

PART NO.:

X1311 W V-XX J-C18 D27
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Water
③Welding Board Angle:V-Stright 180°
④Row No -Pin No:XX-01P-40P
⑤Plastic height: J=1.0mm
⑥Plastic length:C=2.7mm
⑦Plastic length:D=1.8mm

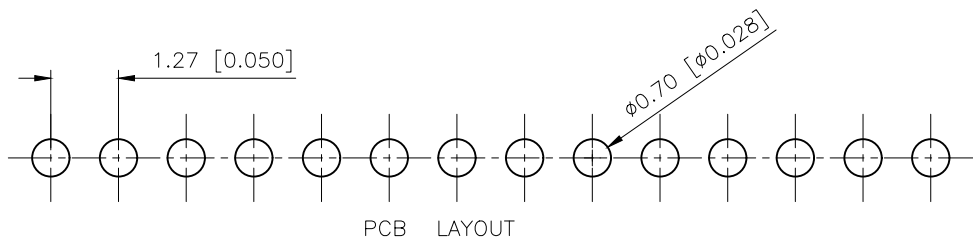

PCB LAYOUT

X1311WV-XXJ-C18D27	PA6T 94V-0	Brass	1U''Gold	X1311F
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Female

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.27mm BTB Connector
CHECKED		UNIT:	mm/in	PART NO.:	X1311WV-XXJ-C18D27
APPROVED		SIZE:	A4	DWG NO.:	