




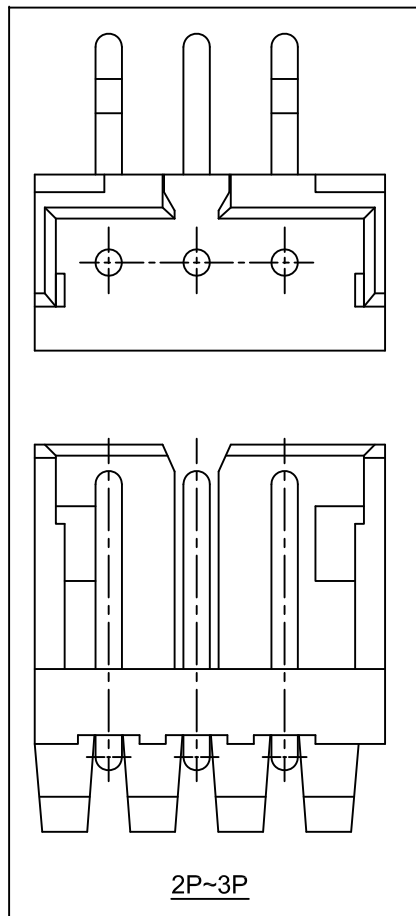


2P~3P





P.C.B LAYOUT
TOLERANCE:±0.05

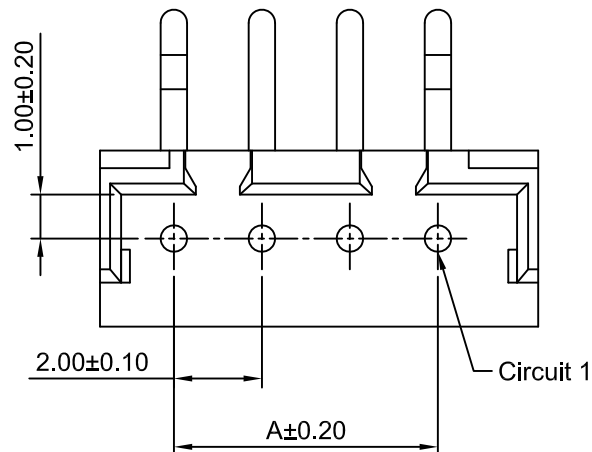

Circuit 1

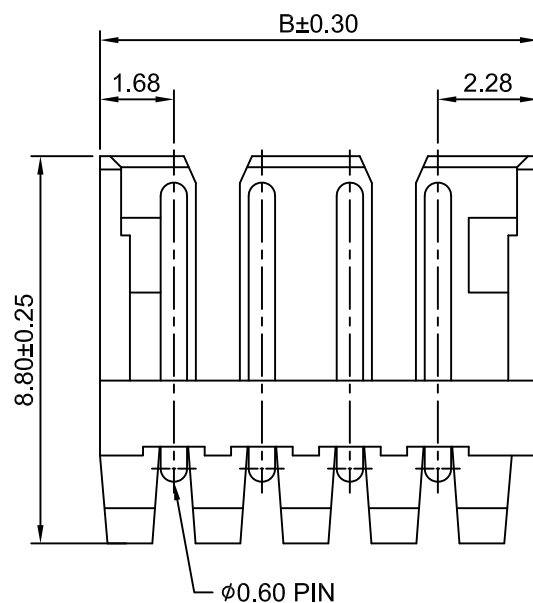

4P~15P

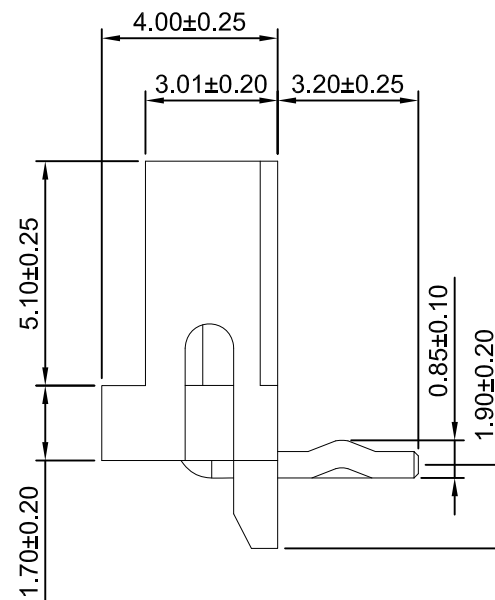

Ordering Information:

A2007WR-XP - *** - ***
1 2 3

1.Part NO.

2.Color:

(blank): White

BK: Black

BL: Blue

YL: Yellow

3.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 4A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2007WR-2P	2.00	5.96
A2007WR-3P	4.00	7.96
A2007WR-4P	6.00	9.96
A2007WR-5P	8.00	11.96
A2007WR-6P	10.00	13.96
A2007WR-7P	12.00	15.96
A2007WR-8P	14.00	17.96
A2007WR-9P	16.00	19.96
A2007WR-10P	18.00	21.96
A2007WR-11P	20.00	23.96
A2007WR-12P	22.00	25.96
A2007WR-13P	24.00	27.96
A2007WR-14P	26.00	29.96
A2007WR-15P	28.00	31.96

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	6:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Dlankul Wan	Jack Yin

General Tolerances	THIRD ANGLE PROJECTION
x.xx±0.25	
x.xx±0.20	
x.xx±0.15	
ANGLES ±1°	

TITLE	
2.00mm PITCH RIGHT-ANGLE WAFER	
DRAWING NO.	REV
A2007WR-XP	A2

REV	DESCRIPTION	DATE
A2	MODIFY DRAWING	2022.06.10
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2005.05.10