


SPECIFICATIONS

- 1.Voltage rating: 50V AC, DC
- 2.Current rating: 2A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:100MΩ min
- 5.Temperature range: -25° C-+85° C
- 6.Contact resistance: 20mΩ max


TERMINAL

Material:Phosphor Bronze
 Finish: Plated Tin or Plated Gold
 Applicable wire: AWG#28-#30
 Insulation O.D.:0.70mm(Max)
 Used in :P1201 SERIES HOUSING
 Qty/Reel: 15000PCS
 Part No.: T1201-00


00=镀金 2=镀锡




SECTION C-C
SCALE 1:1



SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1

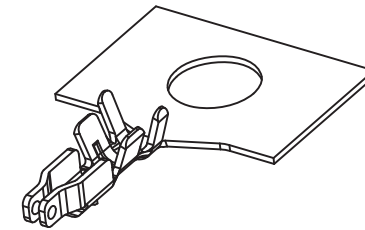

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.20mm Crimp Style Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°			T1201PS-00	DWG. NO.
AO	MODIFICATION	DRAW	DATE								