

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 20A
2. Withstanding voltage : AC1600V/1min.
3. Wire range : 24~12AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	24A		

2. Wire range : 0.2~2.5mm²/4mm²(sol)

NOTES2:







1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.00mm, Poles : N=01~24P
3. Stripping length : 10mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension		range			
Over	TO	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1/10	
10	24	30	60	100	150	∠	
±0.15		±0.20		±0.30		±0.50	
						±0.70	
						±1.00	
						±1.30	
						±2*	

6. RoHS Compliance

Ordering Information

JL271V - 500 XX G 0 1

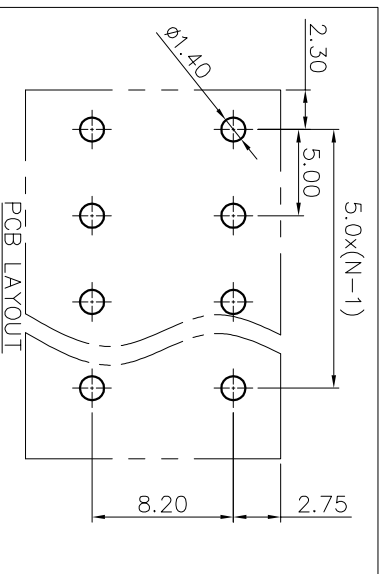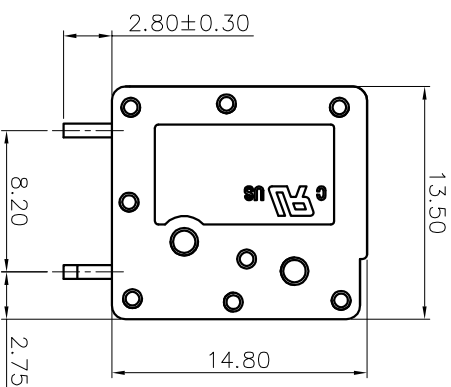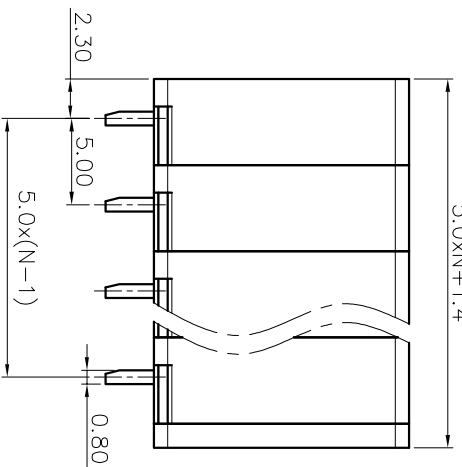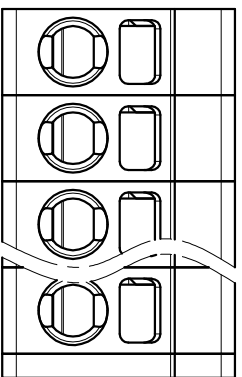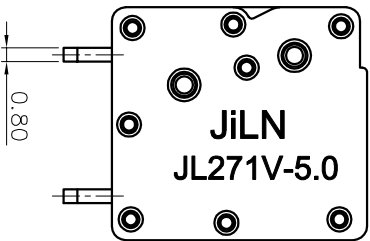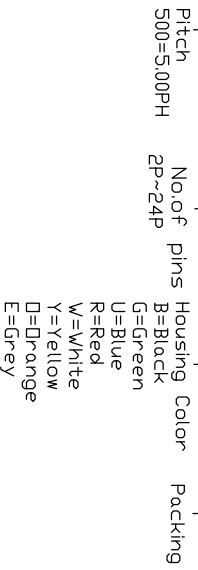

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.30

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL271V-500XXG01
	UNIT	mm				
CHECK	LICHAD LIU		SIZE	A4	TITLE:	JL271V-5.0-XXP 弹簧式/直脚/双排/绿色
APPROVE	YONGLIANG GAO		SHEET	1/1		
	PRDJ					

JiLN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD