



Voltage rating:250V AC/DC
 额定电压: 250V AC/DC
 Current rating:1.0A
 额定电流: 1.0A
 Insulation resistance:1000MΩ Min
 绝缘电阻: 1000MΩ Min
 Withstanding voltage:≥500V AC/minute
 耐压: ≥500VC/分钟
 Temperature range:-40℃-+250℃
 使用温度: -40℃-+250℃



X1270 W V -2xXX B1 - 9T AuSn
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category:W-wafer
- ③ Welding Board Angle:V- Straight 180°
- ④ Row No.-Pin No.:2xXX-2x03P~2x32P
- ⑤ B1:Type B Contains gaps
- ⑥ Material:PA9T-Nylon PA9T UL94V-0
- ⑦ Planting Category:AuSn-Plating AuSn

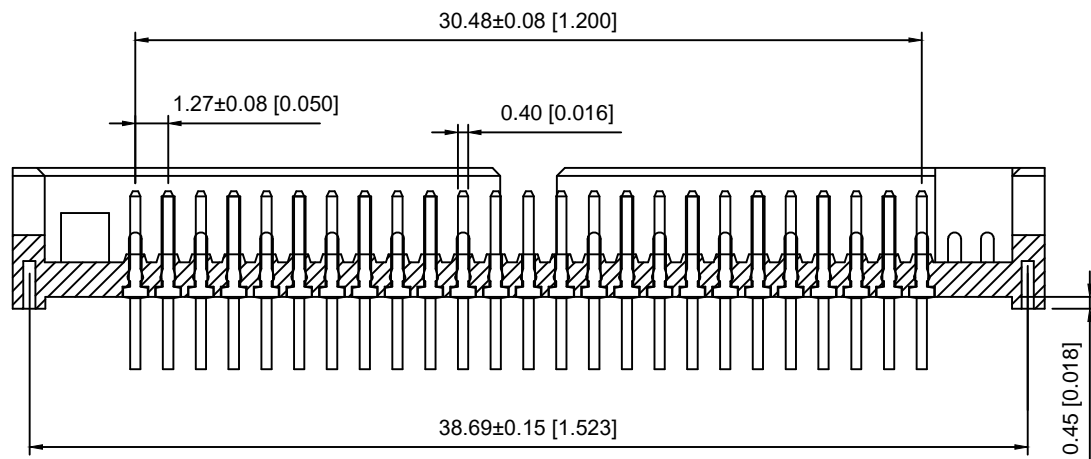

					ANGLAR	±5°	XKLB	DSND	SCALE: N/A	MODEL TYPE: 1.27mm B		
					ΔX	≤ 4		±0.2	DWN	VIEW:	PART NO.: X1270WV-2xXXB1-9TAuSn	
					ΔX	4<L≤ 16		±0.3	CHKD	UNIT: mm/in	DWG NO.:	
					ΔX	16<L≤ 63		±0.4	APPD	SIZE: A4	X-X1270WV-2xXXB1-9TAuSn	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5				WEIGHT	SHEET	REVISION
REVISIONS					UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED			1/1	A0
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn												