




WIRING DIAGRAM			
P1 END		P2 END	
PAD	SIGNAL	PAD	SIGNAL
12	Rx-	19	Tx-
13	Rx+	18	Tx+
18	Tx+	13	Rx+
19	Tx-	12	Rx-

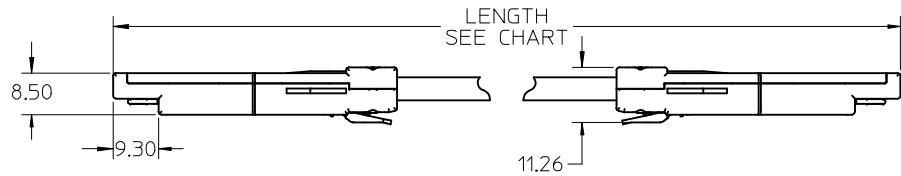

PART NUMBER	LENGTH
74743-0001	1 M ±0.05 M
74743-0002	2 M ±0.08 M
74743-0003	3 M ±0.08 M
74743-0004	4 M ±0.08 M
74743-0005	5 M ±0.08 M
74743-0006	6 M ±0.08 M
74743-0007	7 M ±0.08 M
74743-0008	8 M ±0.08 M
74743-0009	9 M ±0.08 M
74743-0010	10 M ±0.08 M
74743-0011	11 M ±0.08 M
74743-0012	12 M ±0.08 M
74743-0013	13 M ±0.08 M
74743-0014	14 M ±0.08 M
74743-0015	15 M ±0.08 M

NOTES:

- MATERIALS  
 BACKSHELLS - NICKEL PLATED ZINC  
 LATCH - GLASS FILLED POLYCARBONATE  
 PCB - FR-4  
 RIVETS - STAINLESS STEEL  
 IMPEDANCE - 100 OHMS DIFFERENTIAL, PASSIVE
- EACH ASSEMBLY HAS A SERIAL ID
- SEE MOLEX DRAWINGS SD-71153-7\*\*\* FOR CABLE DETAILS
- 4.25 Gbps F.C. BACKWARDS COMPATIBLE TO 1.0625 Gbps F.C.

RELEASED EC NO: DRAWN: JRESENDE 2006/01/05 CHKD: JRESENDE 2006/01/17 APPR: DDOYD 2006/02/21	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
		▼=0 ▽=0	mm      INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	MM ONLY	1:1	METRIC	DRAWN BY: JRESENDE 04/10/14 CHECKED BY: JRESENDE 04/10/14 APPROVED BY: DDOYD 04/10/14	TITLE: SMALL FORM PLUGGABLE ACTIVE, FIBRE CABLE ASSEMBLY - 4.25 GBPS MOLEX INCORPORATED	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.	DOCUMENT NO.	SHEET NO.			
				SEE TABLE	SD-74743-001	1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		