


MTS05008 - Terminal block

Number of poles: 5, Clamp tightening, 17.5A, 1mm², 14AWG, 300V, Pitch 3,5 mm, Modular, Wiring angle 0°, Number of levels: 1, Green (RAL 6032), Soldering technology Wave, UL, VDE, IMQ, CSA

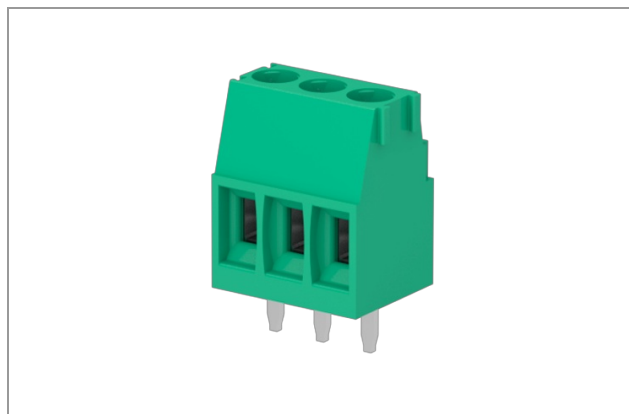

Number of poles:	5
Number of levels:	1
Sides configuration:	Modular
Pitch:	3,5 mm
Voltage:	300 V
Current :	17.5 A
Wire section:	0.05 ÷ 1.5 mm ² / 30 ÷ 14 AWG
Available approvals:	UL, VDE, IMQ, CSA

General Data

Features

Screw dimension	M2
Stripping length	6 mm
Operating temperature range	-40°C ÷ 110°C
Contact resistance	<15 mOhm
Insulation resistance	>1 GOhm

Certifications

CSA (n.LR 102896)

Rated voltage	300 V
Nominal current	12 A
Wire section	14 AWG

IMQ (n.CA02.00146)

Rated voltage	130 V
Nominal current	17.5 A
Wire section	1.5 mm ²
Insulating category	I

UL (n.E167473)

Rated voltage	300 V
Nominal current	12 A
Wire section	14 AWG

VDE (n.40021759 Reg.-Nr. C362)

Rated voltage	130 V
Nominal current	12 A
Wire section	1 mm ²
Insulating category	I

