


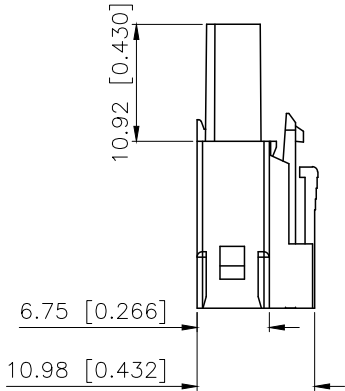
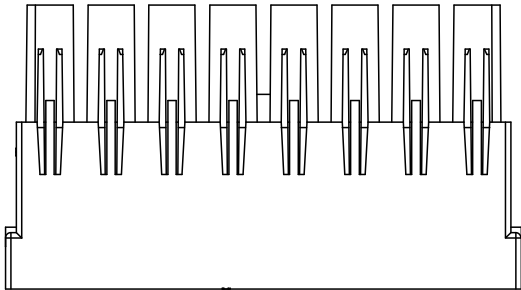
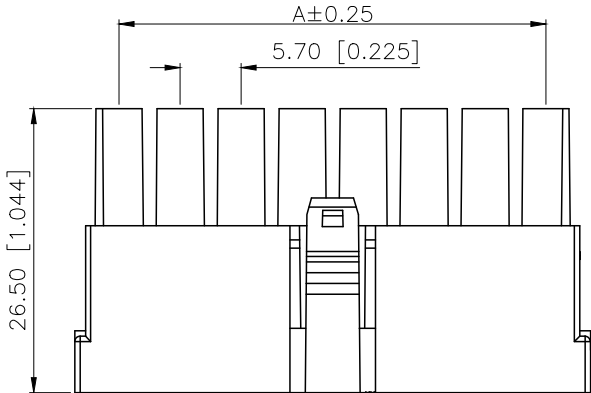


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		pin数表尺寸修正, 图框升级整理图面	2024.08.15	阿 树

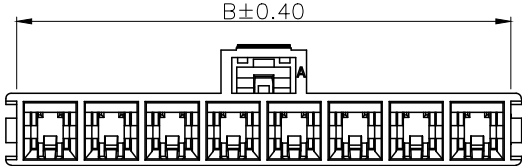

Specifications:
规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:23A AC/DC
额定电流: 23A AC/DC
Withstanding voltage:2200V AC/minute
耐受电压: 2200V AC/分钟
Temperature range:-40℃-+105℃
温度范围: -40℃-+105℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:10mΩ Max
接触电阻: 10mΩ Max

PART NO.:
X45702 H-XX-N0
① ② ③ ④
① Series No
② Category:H-HSG
③ Row No.Pin No:XX-02~08P
④ Material:N0-Nylon 66 UL94V-0 Black

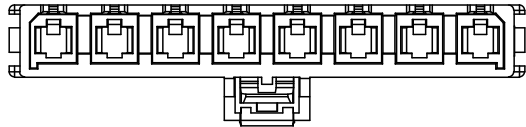

Poles	Dimensions(mm)	
	A	B
2	5.70	12.05
3	11.40	17.75
4	17.10	23.45
5	22.80	29.15
6	28.50	34.85
7	34.20	40.55
8	39.90	46.25

X5701H-XX-N0	Nylon 66	X5701W	X5701H
PART NO	Material	Suitable XKB Wafer	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	5.7mm Crimp Style Connector
PART NO.:	X5701H-XX-N0
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1