
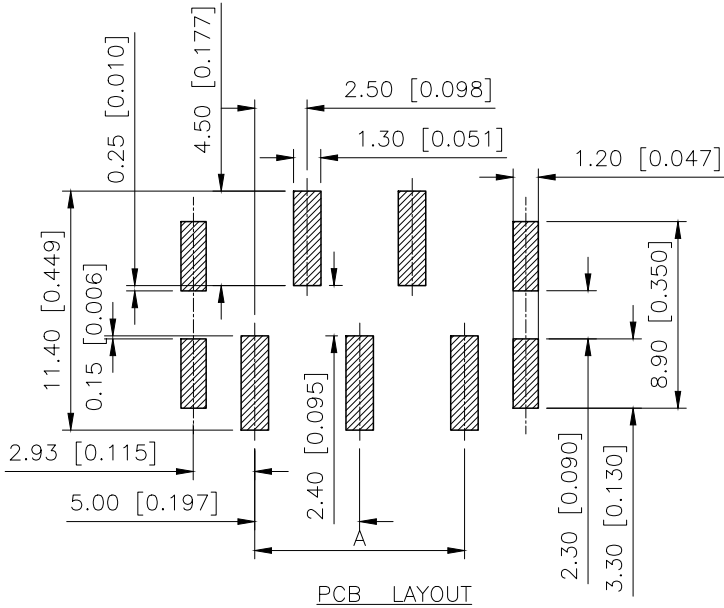



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.12	阿树

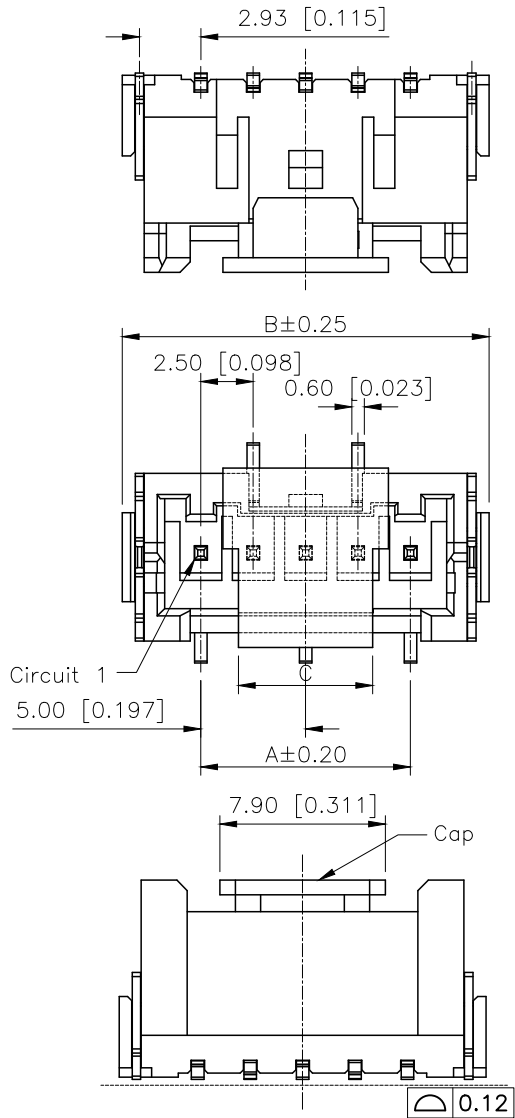

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ

PART NO.:

X2508 W V S-XX-9T SW
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~15Pin
⑥Material: 9T-PA9T 94V-0
⑦Planting:SW-Matte Tin Plating

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	10.00	5.30	09	16.00	24.00	6.40
03	4.00	12.00		10	18.00	26.00	
04	6.00	14.00		11	20.00	28.00	
05	8.00	16.00	6.40	12	22.00	30.00	
06	10.00	18.00		13	24.00	32.00	
07	12.00	20.00		14	26.00	34.00	
08	14.00	22.00		15	28.00	36.00	

X2508WVS-XX-9TSW	PA9T	Barss	X2508H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2508WVS-XX-9TSW
APPROVED		SIZE: A4	DWG NO.: