

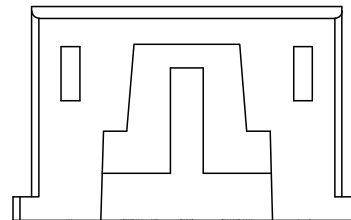
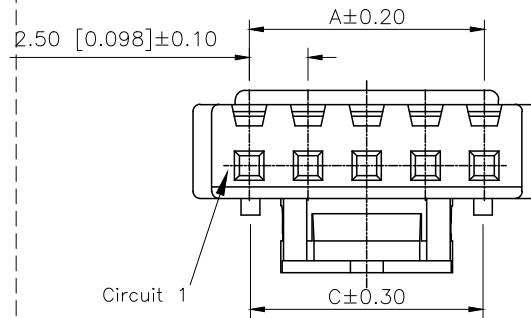


3D图示(参考)

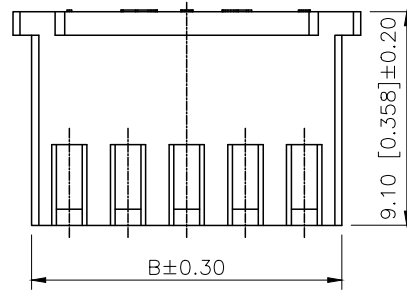

PART NO.:

X8821 H M-XX-L NO
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:HM-HSG
③Row No.Pin No.: XX-02P~15P
④Plug the Pin&Special No:L-With Lock
⑤Material:NO-PA66 94V-0

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥500MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤30mΩ

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	5.70	/	10	22.50	25.70	22.40
03	5.00	8.20	4.90	11	25.00	28.20	24.90
04	7.50	10.70	7.40	12	27.50	30.70	27.40
05	10.00	13.20	9.90	13	30.00	33.20	29.90
06	12.50	15.70	12.40	14	32.50	35.70	32.40
07	15.00	18.20	14.90	15	35.00	38.20	34.90
08	17.50	20.70	17.40	16	37.50	40.70	37.40
09	20.00	23.20	19.90				

X8821HM-XXL-NO	Nylon 66 UL 94V-0	X8821T-L	X8821W-L
PART NO	Material	Suitable SWB terminal	Mates With XKB Wafer

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.50 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X8821HM-XXL-NO
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1